DAIRY

MPD316

MULTIDECK DOOR DEEP MEDIUM TEMPERATURE CABINET



ENHANCED ENERGY EFFICIENCY & VERSATILITY



MPD316 - Dairy - Multideck Door Deep Medium Temperature Cabinet

PRODUCT BENEFITS

- Ergonomic design for easy access
- Alternative shelving layouts to optimise merchandising
- Optimised display with LED lighting
- Low Total Energy Consumption (TEC)
- Longer merchandise shelf life
- Product temperature compliance
- Simple to install and maintain
- Designed for modular configurations

STANDARD FEATURES

- Internal and external powder coating
- Single row of 4000K LED canopy lighting
- Vertical 4000K mullion LED lights
- 5 rows of 600mm powder coated shelves
- Ticket strips
- Galvanised base
- Rubber bumper
- Evaporator assembly fitted with valve
- EC fan motors
- Digital thermometer display fitted
- Alarm probe fitted with conduit and draw wire
- Standard doors and handles

CUSTOMISATIONS Shelving & Base Shelf

- Additional shelves and brackets
- Stainless steel reinforced shelving and base tray
- Hang sell and bar
- Wire or acrylic shelf fences (45mm, 75mm)
- Adjustable wire base rack with product stop

Lighting

- Undershelf lighting
- Standard lighting (3000K, 3300K, 4000K)
- Premium lighting available

Ends


- Solid mirror end / Glass view end
- Common end
- Acrylic full height system divider


Bumper

- Stainless steel bumper (single or double rail) Other
- Fully Frameless Doors (as shown in render)
- Rear mirror kit
- Top mount piping
- Rear dress panels
- Valance panels top or lower rear
- Stainless steel base liner
- Technology solutions
- Electronic shelf labels or video rail

Energy & Sustainability

- Ambient Fan Kit

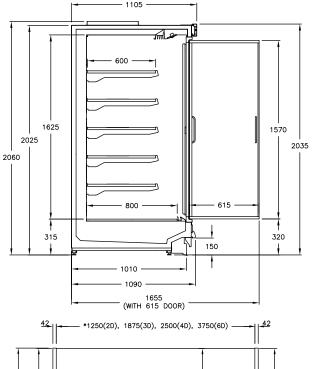



AVAILABLE LENGTHS

Excluding Ends: Crown Ends: 1250, 1875, 2500, 3750 1875, 2115

TEMPERATURE CLASS 3M1

(-1°C to +5°C)

AVAILABLE DEPTHS

 MPD116 - Narrow:
 890

 MPD216 - Standard:
 990

 MPD316 - Deep:
 1090

AVAILABLE COLOURS



Additional Information

All Dimensions shown in Millimetres (mm) unless otherwise stated. Dimensions and features are subject to change. Please obtain current technical information prior to order confirmation.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or Shipped.

© 2020 Hussmann Corporation - Version - V.1.0



·

HUSSMANN®

Australia Head Office 66 Glendenning Road Glendenning, NSW 2761 Australia **ph.** +612 8805 0400 **w.** www.hussmann.com.au