
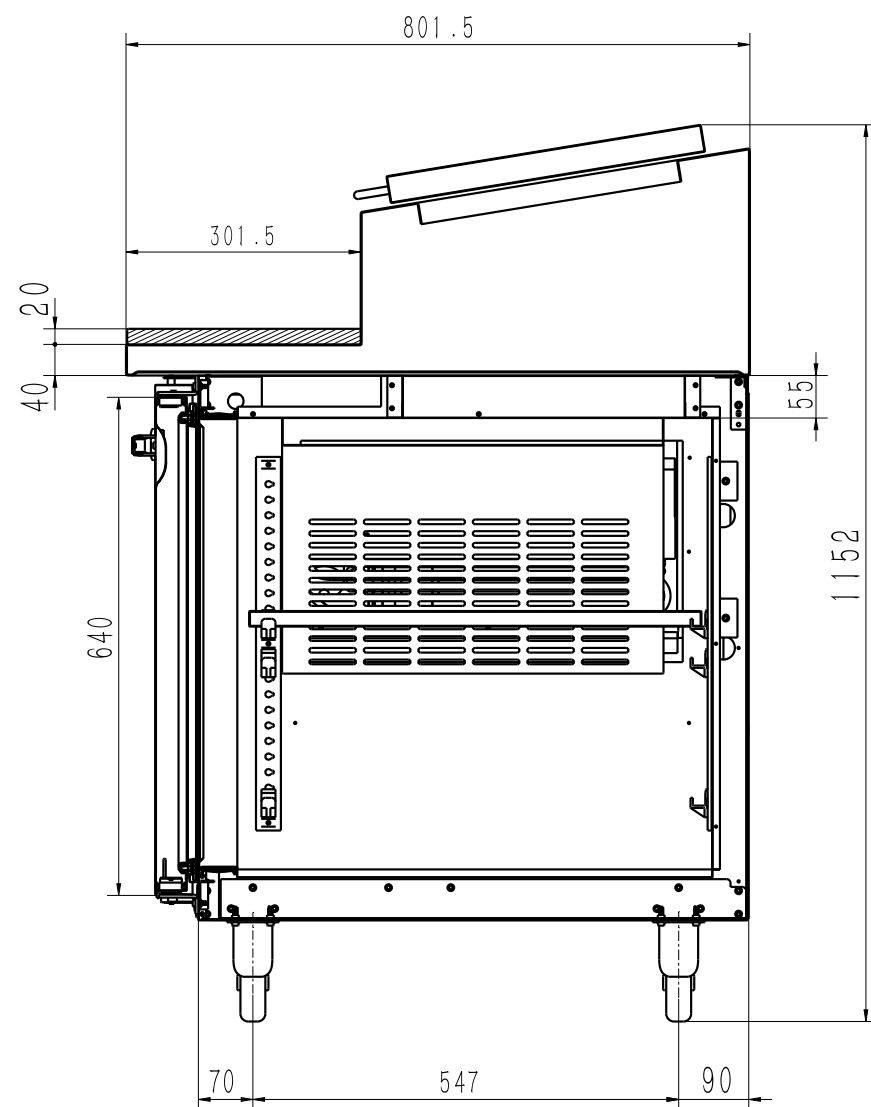
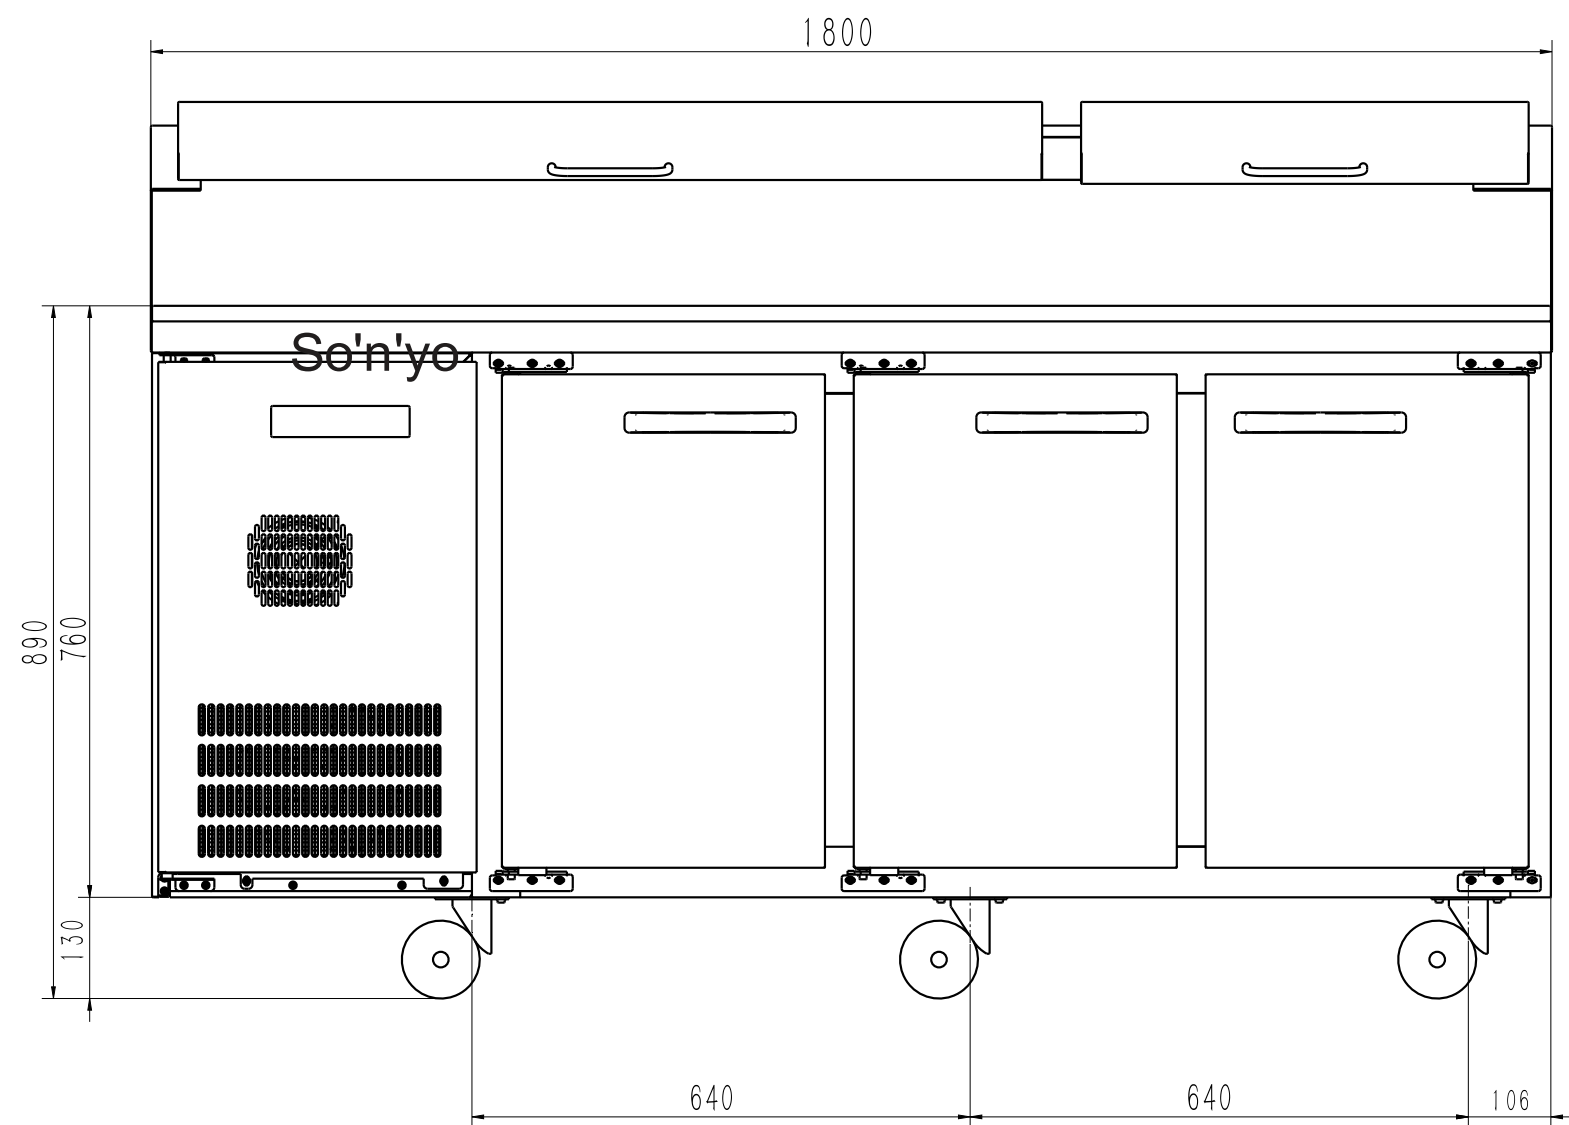


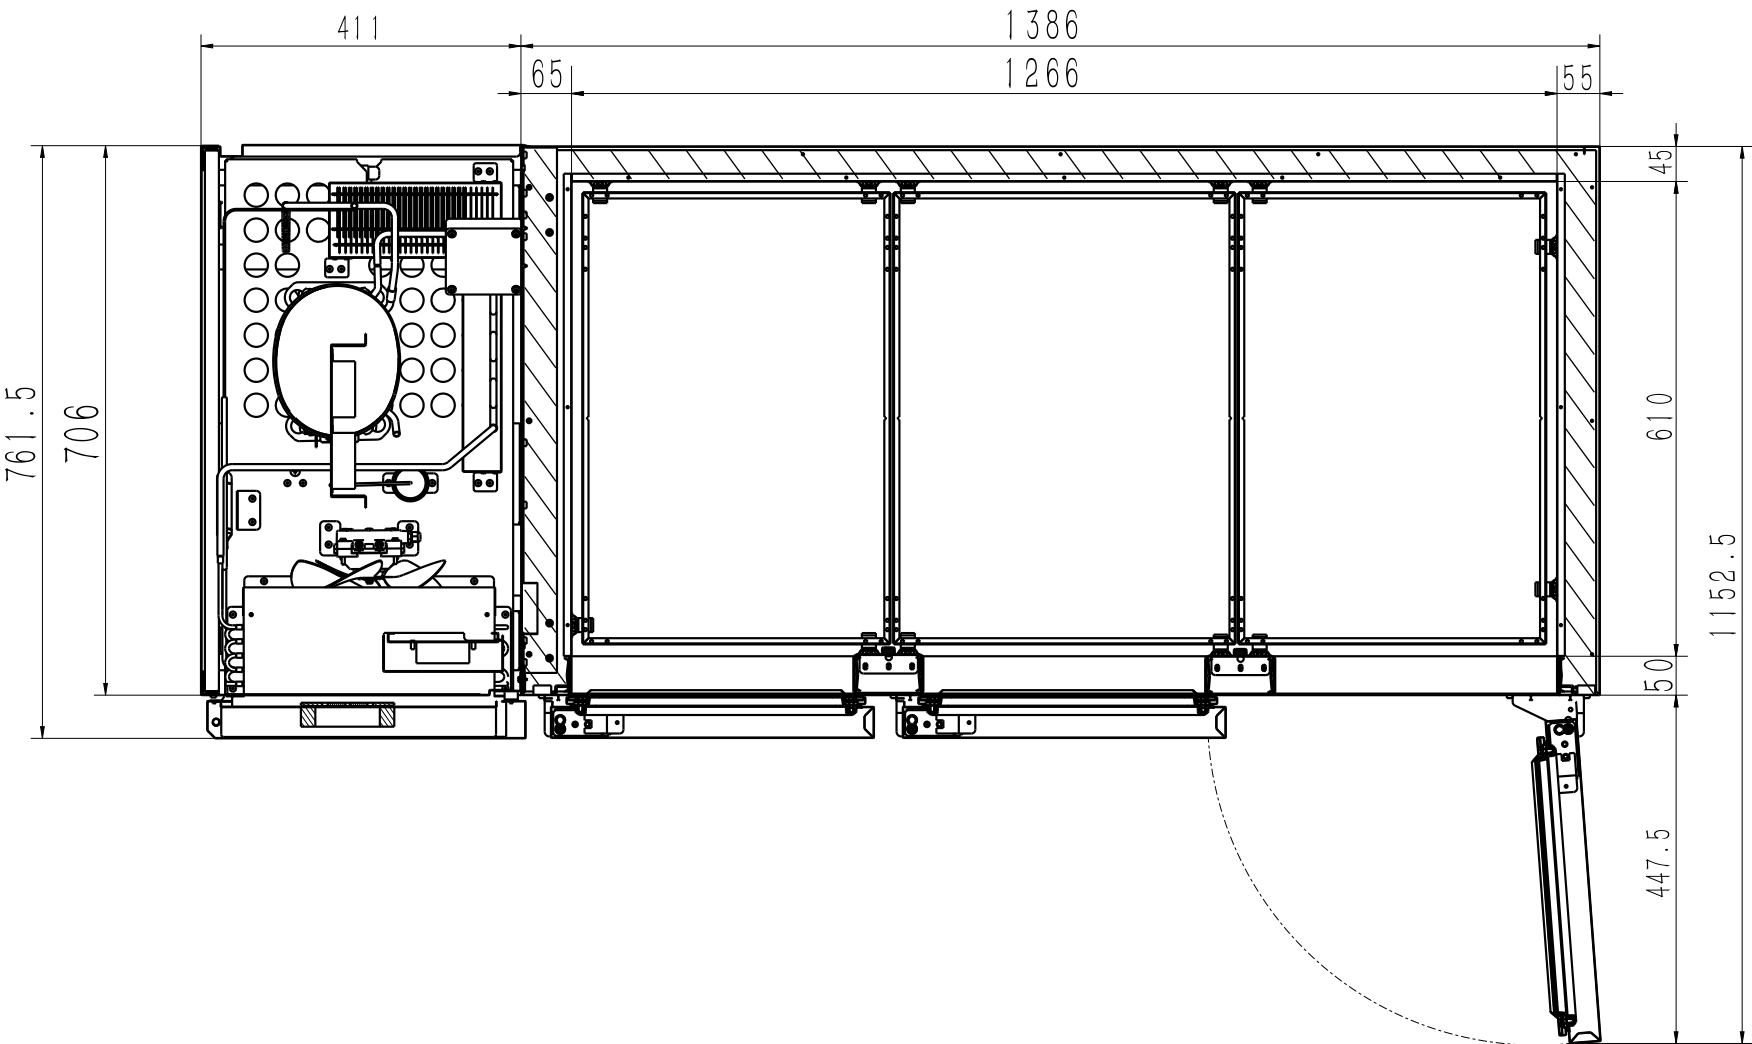

| Description           |                             | Commercial refrigerator                                                                                             |       |        |
|-----------------------|-----------------------------|---------------------------------------------------------------------------------------------------------------------|-------|--------|
| Model Number          |                             | SUR-1871HPZ(AUS)(W)                                                                                                 |       |        |
| Dimensions            | Overall dimensio<br>(WxDxH) | 1800mm                                                                                                              | 800mm | 1150mm |
|                       | Inner dimension<br>(WxDxH)  | 1226mm                                                                                                              | 550mm | 608mm  |
|                       | Effective volume            | 410L                                                                                                                |       |        |
| Material              | Overall Material            | Stainless steel plate   OUT: SUS304   -NO.4                                                                         |       |        |
|                       | Door                        | Stainless steel plate   OUT: TTS443M-NO.4                                                                           |       |        |
|                       | Inner Material              | Stainless steel plate   IN: SUS304   -2B                                                                            |       |        |
|                       | Net Rack                    | Net rack painted with polyethylene                                                                                  |       |        |
| Performance           | Insulation                  | Cyclopentane                                                                                                        |       |        |
|                       | Condition                   | External air temperature 40℃ (lids closed) or 30℃ (lids open)<br>Without load balancing and direct sunlight shining |       |        |
|                       | Inter Temperature           | 0 ~ 10℃                                                                                                             |       |        |
| Main parts            | Temperature setting range   | 0℃ ~ 10℃                                                                                                            |       |        |
|                       | Compressor                  | HUAYI cubigel                                                                                                       |       |        |
|                       | Condenser                   | Fin Type Forced Circulation                                                                                         |       |        |
|                       | Evaporator                  | Fin Type Forced Circulation                                                                                         |       |        |
|                       | Refrigerant                 | R290                                                                                                                |       |        |
|                       | Evaporation motor           | DC12V   6W * 2                                                                                                      |       |        |
|                       | Condensing motor            | AC 220-240V   20W*1                                                                                                 |       |        |
|                       | Tem. Meter                  | Mini computer control                                                                                               |       |        |
| Electrical parameters | Defrost                     | Mini computer control , Auto heat defrosting                                                                        |       |        |
|                       | Power                       | Single phase 220V~240V   50Hz/60Hz                                                                                  |       |        |
|                       | Rated power                 | 500W                                                                                                                |       |        |
|                       | Defrost power               | 310W                                                                                                                |       |        |
|                       | Power cord                  | Length: 3m   Plug : 3 Pole plug of HongKong with                                                                    |       |        |
|                       | Plug                        | 2-plug with gronging end 10A 250V                                                                                   |       |        |
|                       | Light                       | DC24V 3W                                                                                                            |       |        |
|                       | Foot                        | Standard 155mm high casters Two in the front with brakes and two in the back without brakes                         |       |        |
|                       | Accessory                   | 2 Net rack , 5 Net rack support                                                                                     |       |        |
| Others                |                             | Condenser filternet                                                                                                 |       |        |
| Weight                |                             | 140kg                                                                                                               |       |        |
|                       |                             |                                                                                                                     |       |        |

Note:1 . For the output power :The electromotor normal stipulatlated output power.

2 . Please use this numerical value ,if you want to express the electrical expender .

Panasonic

Panasonic Commercial Food Service  
Husmann Australia  
Panasonic@husmann.com

| APPROVALS  |  | DESIGN     | SCALE  | Version number      |            |
|------------|--|------------|--------|---------------------|------------|
| 王 勇        |  | 彭 伟        | A 4    | SUR-1871HPZ(AUS)(W) |            |
| 2025.12.23 |  | 2025.12.23 | 1 : 30 | Date                | 2025.12.23 |

|              |                     |
|--------------|---------------------|
| Model Number | SUR-1871HPZ(AUS)(W) |
|--------------|---------------------|