

Panasonic

Commercial Food Services

PRODUCT CATALOGUE

2024 | 2025



Quality that lasts

In all Sectors

With Panasonic, you optimise your Total Cost in Ownership (TCO) and Total Value of Ownership (TVO) for the whole life of your appliance - and that's not a short time!



Save on costs

- » High energy efficiency
- » Low total operating costs
- » Long service life suitable for commercial operation



Save on time

- » Low effort with easy-to-clean design and materials
- » Maximum ergonomic efficiency for effortless work processes
- » Low maintenance



Ensure save storage of goods


- » Guaranteed temperature stability even at peak times
- » Designed for commercial application



A focus on sustainability

- » Appliances with very low energy consumption
- » Natural refrigerant on chillers and freezers
- » Resource-saving manufacturing processes

Contents

	Vertical Doored Chillers Hussmann by Austral	7
	Grab-N-Go Self-Contained MultiDeck and Semi-Vertical	11
	Commercial Refrigerators HP Series Upright & Under Bench	17
	Commercial Freezers HP Series Upright & Under Bench	23
	Microwaves Light, Medium, Heavy, Convection Oven	27
	Rice Cookers Lid And Hinged	31

The Highest Level of Precision and Reliability



At Panasonic, quality is not just a standard – it's a promise. Our products are crafted with meticulous attention to detail, ensuring superior performance, durability, and reliability in any culinary setting. From cutting-edge technologies to user-friendly designs, each product is a testament to our unwavering commitment to excellence.

Experience the difference that Panasonic products can make in your food service operations. Explore our catalogue to find a range of innovative solutions that elevate your culinary experience and set new benchmarks for quality and efficiency.


Discover excellence in every detail with the Panasonic Food Service equipment. Immerse yourself in a world where precision engineering, Japanese design, and innovation converge to deliver unparalleled quality in every product.

Sustainability



Husmann Sustainability Program

Husmann’s sustainability focus drives its case design to prioritise energy efficiency, reduced environmental impact, and improved product lifespan, resulting in innovative and eco-friendly solutions for its customers. The Husmann ESG framework is based on four pillars.

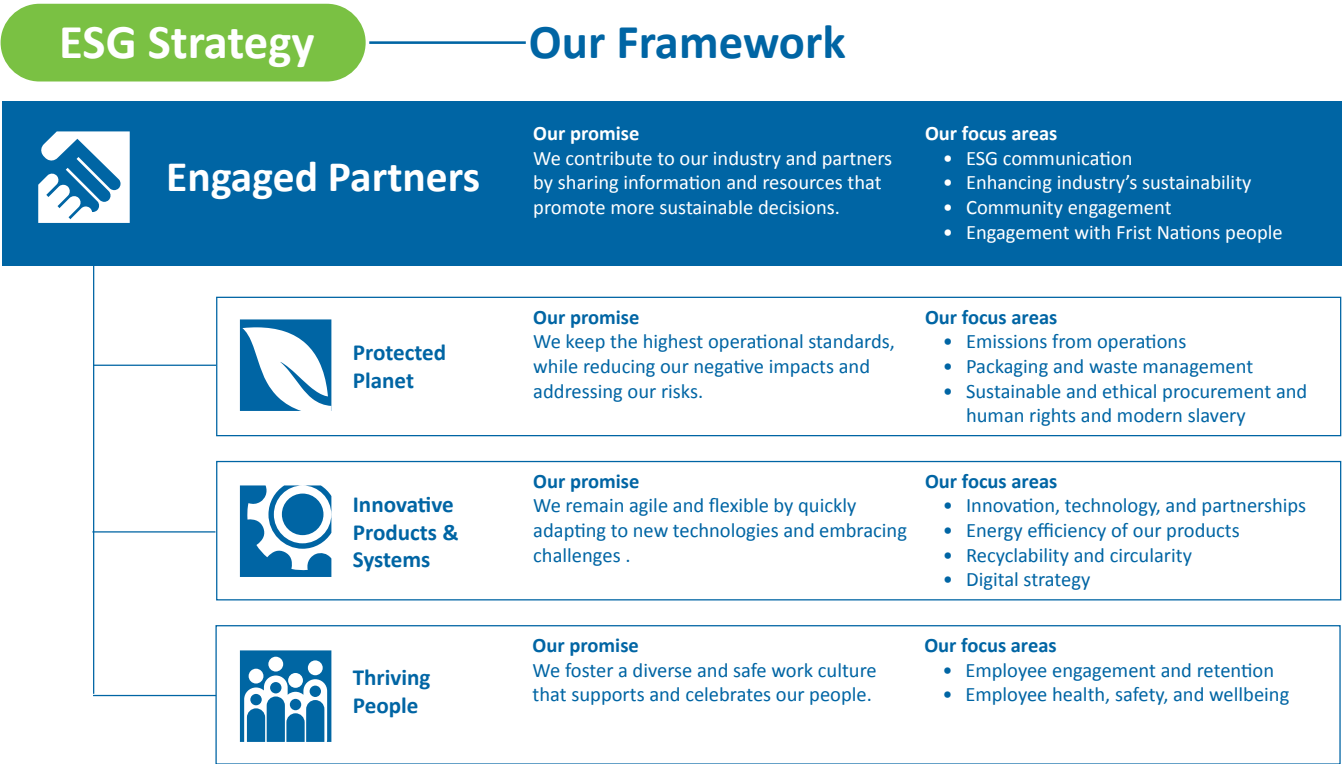




Introducing

Vertical Doored Chillers

HUSSMANN

By **austral**

Equipped with state-of-the-art natural refrigerant and inverter compressor technology and eye-level display space, this fridge offers a perfect blend of functionality and style, ensuring your products are easily accessible and irresistibly tempting.

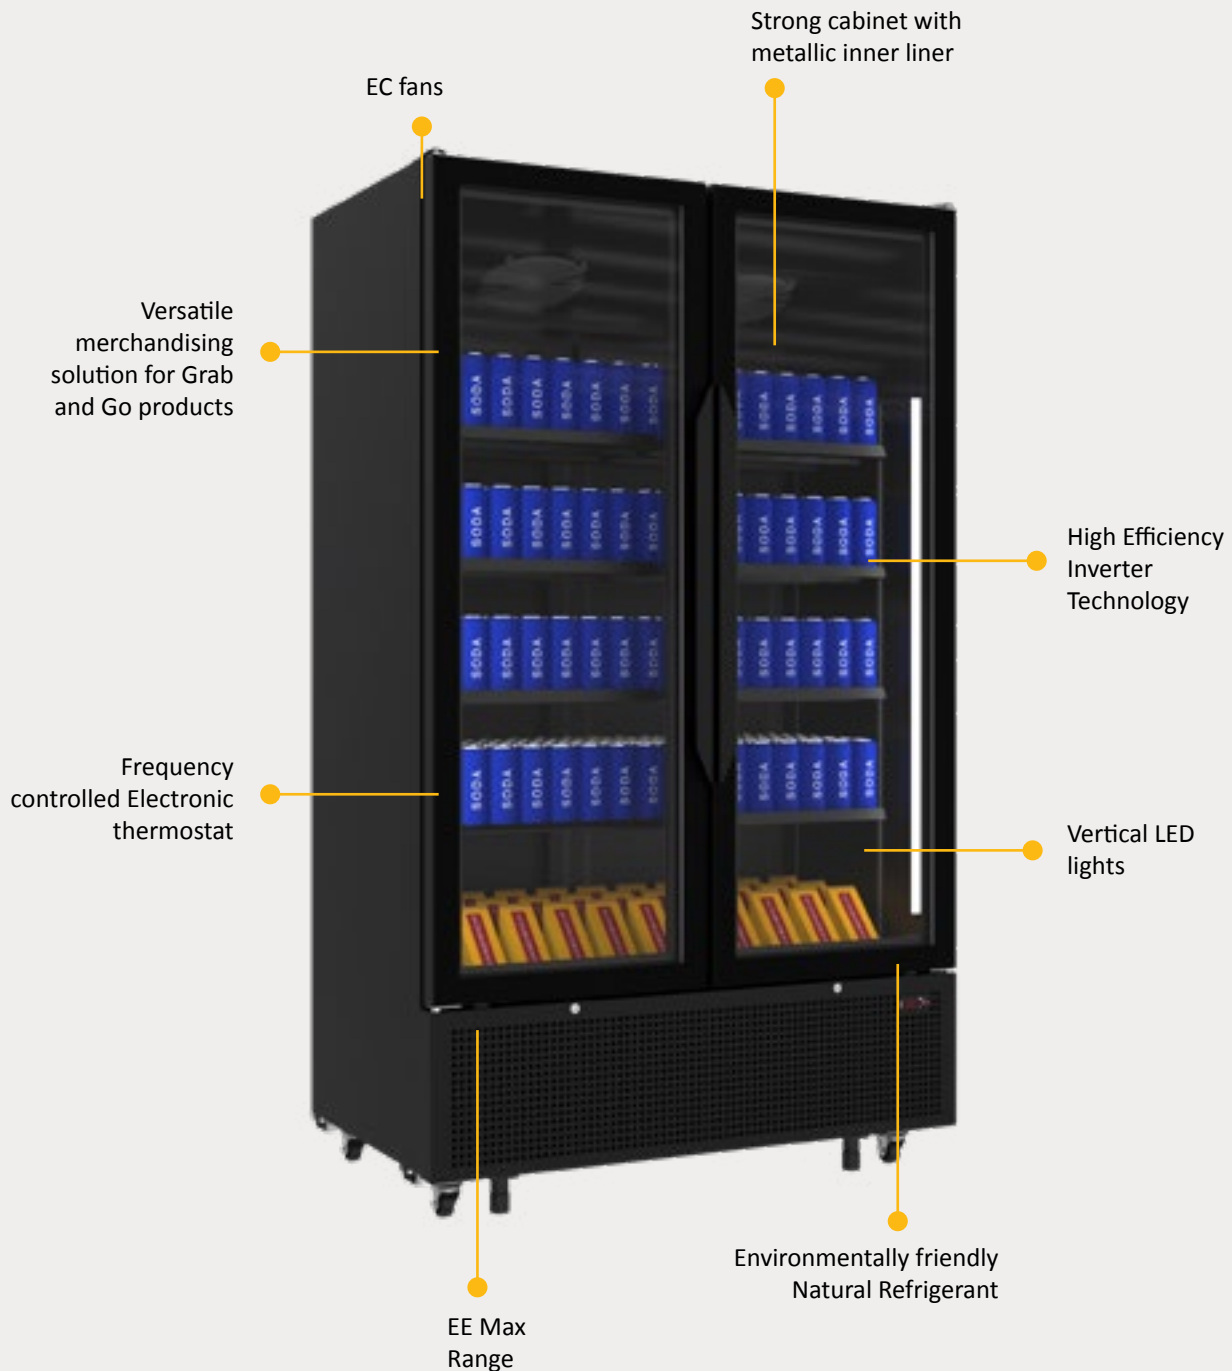

INVERTER





Single Door Chiller – BV520 W VS

EXTERNAL DIMENSIONS [L x W x H]	680x 615 x 2190mm
INTERNAL DIMENSIONS [L x W x H]	575 x 500 x 1675mm
GROSS/NET VOLUME (LT)	519 / 467
330ML CAN LOADING (MAX)	684
500ML BOTTLE LOADING (MAX)	344
FACING	8
TRANSPORT CONTAINER 40 HC *with extended aluminum handle	51

*Supplied black internal, black external



Temp Class 3M1
(-1°C to +5°C)



Single Door Chiller – BV770 W VS

EXTERNAL DIMENSIONS [L x W x H]	800 x 700 x 2190mm
INTERNAL DIMENSIONS [L x W x H]	720 x 570 x 1685mm
GROSS/NET VOLUME (LT)	728 / 678
330ML CAN LOADING (MAX)	978
500ML BOTTLE LOADING (MAX)	489
FACING	10
TRANSPORT CONTAINER 40 HC *with extended aluminum handle	42

*Supplied black internal, black external



Temp Class 3M1
(-1°C to +5°C)



Double Door Chiller – BV1300 W VS

EXTERNAL DIMENSIONS	1200 x 735 x 2190mm
INTERNAL DIMENSIONS	1125 x 622 x 1571mm
GROSS/NET VOLUME (LT)	1142 / 1088
330ML CAN LOADING (MAX)	1306
500ML BOTTLE LOADING (MAX)	674
FACING	16
TRANSPORT CONTAINER 40 HC *with extended aluminum handle	24

*Supplied black internal, black external



Temp Class 3M1
(-1°C to +5°C)



Triple Door Solution – BV1600 W VS

EXTERNAL DIMENSIONS	1600 x 735 x 2190mm
INTERNAL DIMENSIONS	1500 x 623 x 1545mm
GROSS/NET VOLUME (LT)	1455 / 1326
330ML CAN LOADING (MAX)	1828
500ML BOTTLE LOADING (MAX)	912
FACING	22
TRANSPORT CONTAINER 40 HC *with extended aluminum handle	21

*Supplied black internal, black external



Temp Class 3M1
(-1°C to +5°C)



Strong Metallic
Inner Liner



LED
Illumination

Customised Corporate Decals

Customised decals are a great way to add a personal touch to your products or merchandise.

At Hussmann, we offer a wide range of customised decals that can be tailored to suit your specific needs and preferences. Whether you want to promote your brand, showcase your logo, or simply add some flair to your products, our customised decals are the perfect solution.

Benefits:



Brand visibility:

Allow you to prominently display your brand name and logo, increasing visibility and recognition among customers.



Personalised touch:

Can be designed to reflect your unique style and personality, adding a personal touch to your products.



Promotional tool:

Can be designed as a promotional tool to attract new customers and increase sales.



Versatile:

Can be applied to a wide range of surfaces, including glass, metal, plastic, and more, making them a versatile option for a variety of products.



Durable:

Are made from high-quality materials that are durable and long-lasting, ensuring that your branding stays looking sharp for years to come.






Introducing

Grab'n Go

A multi-functional grab and go solution which is not only self-contained but also energy efficient.

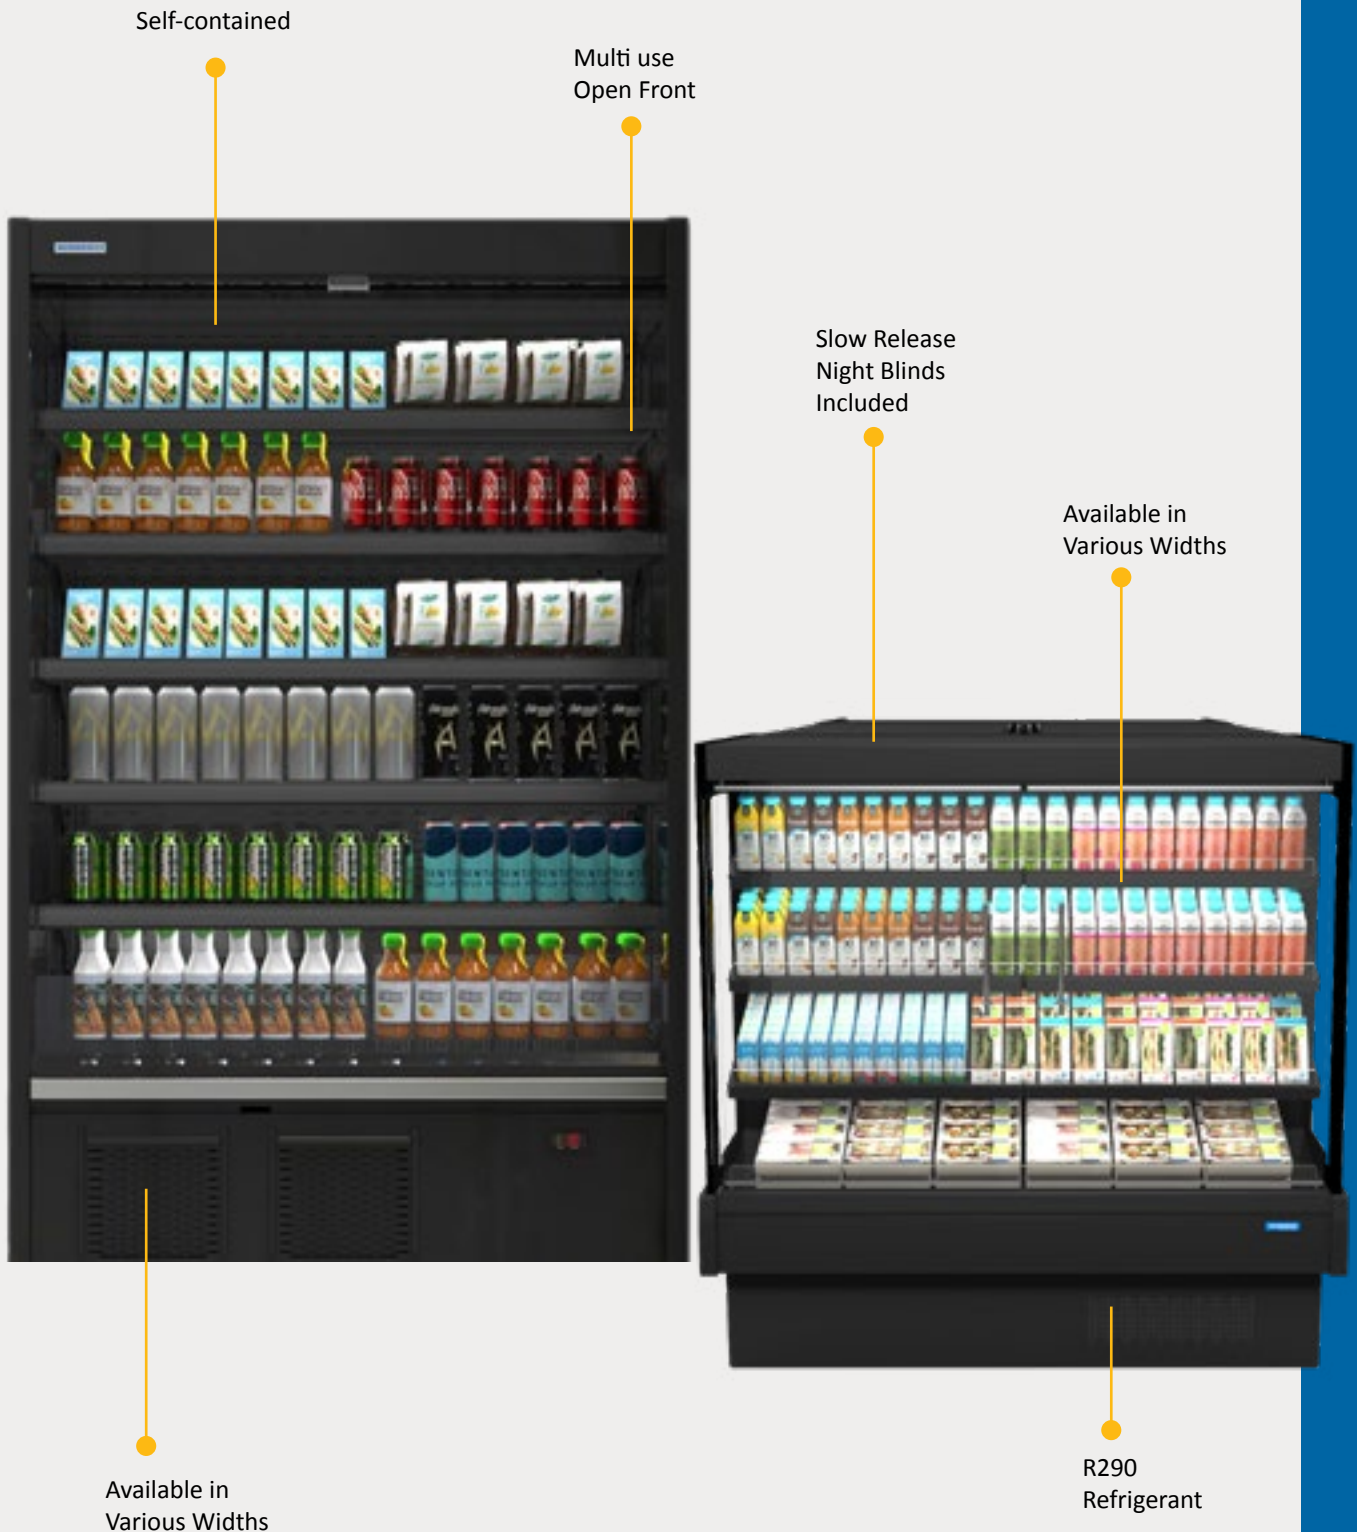

HUSSMANN®



Panasonic Food Service

Self-Contained Multideck Chiller Open



H2TMS-10
Chiller Open

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	980
DEPTH (MM)	860
NET VOLUME (L)	529
DISPLAY AREA (M ²)	1.409
AMPERES (AMP)	10A



H2TMS-14
Chiller Open

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	1330
DEPTH (MM)	860
NET VOLUME (L)	735
DISPLAY AREA (M ²)	1.958
AMPERES (AMP)	15A



H2TMS-19
Chiller Open

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	1955
DEPTH (MM)	860
NET VOLUME (L)	1102
DISPLAY AREA (M ²)	2.936
AMPERES (AMP)	15A



H2TMS-26
Chiller Open

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	2580
DEPTH (MM)	860
NET VOLUME (L)	1469
DISPLAY AREA (M ²)	3.915
AMPERES (AMP)	20A



Temp Class 3M1
(-1°C to +5°C)



Temp Class 3M1
(-1°C to +5°C)



Temp Class 3M1
(-1°C to +5°C)



Temp Class 3M1
(-1°C to +5°C)



*Available in Black & Grey

Self-Contained Multideck Chiller Doored



H2TMDS-7
Chiller 1-Door

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	705
DEPTH (MM)	860
NET VOLUME (L)	367
DISPLAY AREA (M ²)	0.811
AMPERES (AMP)	10A



H2TMDS-10 & 14
Chiller 2-Door

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	980, 1330
DEPTH (MM)	860
NET VOLUME (L)	529, 735
DISPLAY AREA (M ²)	1.607, 1.918
AMPERES (AMP)	10A



H2TMDS-19
Chiller 3-Door

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	1955
DEPTH (MM)	860
NET VOLUME (L)	1102
DISPLAY AREA (M ²)	2.469
AMPERES (AMP)	10A



H2TMDS-26
Chiller 4-Door

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	2580
DEPTH (MM)	860
NET VOLUME (L)	1469
DISPLAY AREA (M ²)	3.317
AMPERES (AMP)	20A



Temp Class 3M1
(-1°C to +5°C)



Temp Class 3M1
(-1°C to +5°C)



Temp Class 3M1
(-1°C to +5°C)



Temp Class 3M1
(-1°C to +5°C)



Forced
Evaporation



220-240V
Single Phase



LED
Lighting



2 Year Parts
& Labour
Warranty

Self-Contained Multideck Glass Door Freezer



H2TLDS-7

Freezer 1-Door



H2TLDS-14

Freezer 2-Door



H2TLDS-19

Freezer 3-Door



H2TLDS-26

Freezer 4-Door

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	705
DEPTH (MM)	860
NET VOLUME (L)	239
DISPLAY AREA (M ²)	0.811
AMPERES (AMP)	10A

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	1330
DEPTH (MM)	860
NET VOLUME (L)	479
DISPLAY AREA (M ²)	1.607
AMPERES (AMP)	10A

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	1955
DEPTH (MM)	860
NET VOLUME (L)	718
DISPLAY AREA (M ²)	2.469
AMPERES (AMP)	20A

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	2580
DEPTH (MM)	860
NET VOLUME (L)	958
DISPLAY AREA (M ²)	3.317
AMPERES (AMP)	20A



Temp Class 3L1
(-18°C to -15°C)



Temp Class 3L1
(-18°C to -15°C)



Temp Class 3L1
(-18°C to -15°C)



Temp Class 3L1
(-18°C to -15°C)



Self-Contained Multideck Hot Open



Coming soon

H2TH-7

Hot Open



Coming soon

H2TH-10

Hot Open



Coming soon

H2TH-14

Hot Open

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	685
DEPTH (MM)	860
NET VOLUME (L)	365
DISPLAY AREA (M ²)	0.93
AMPERES (AMP)	TBA

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	960
DEPTH (MM)	860
NET VOLUME (L)	525
DISPLAY AREA (M ²)	1.34
AMPERES (AMP)	15A

HEIGHT (MM)	2100
TOTAL LENGTH (MM)	1310
DEPTH (MM)	860
NET VOLUME (L)	729
DISPLAY AREA (M ²)	1.86
AMPERES (AMP)	TBA



Temp Class Hot
(+60 / +80 °C)



Temp Class Hot
(+60 / +80 °C)



Temp Class Hot
(+60 / +80 °C)



Forced
Evaporation



220-240V
Single Phase



Heater
Defrost



LED
Lighting



1 Year Parts
& Labour
Warranty

Self-Contained Semi-Vertical Open



SGN141S

Display Cabinet

HEIGHT (MM)	1400
WIDTH WITH ENDS (MM)	650
ENDS (MM)	40
DEPTH (MM)	720



Temp Class 3M1
(-1°C to +5°C)



SGN152S

Chiller Open

HEIGHT (MM)	1500
WIDTH WITH ENDS (MM)	1017, 1330, 1530 (C), 1955
ENDS (MM)	40
DEPTH (MM)	760



Temp Class 3M1
(-1°C to +5°C)



Forced
Evaporation



220-240V
Single Phase



LED
Lighting



1 Year Parts
& Labour
Warranty

Self-Contained Semi-Vertical Door



SGND153S Q4

Glass Door Hinged

HEIGHT (MM)	1500
WIDTH WITH ENDS (MM)	1017, 1330, 1530 (C), 1955
ENDS (MM)	40
DEPTH (MM)	720



Temp Class 3M1
(-1°C to +5°C)



Temp Class 3M1
(-1°C to +5°C)



SGND153S Q5

Glass Door Sliding

HEIGHT (MM)	1500
WIDTH WITH ENDS (MM)	1017, 1330, 1530 (C), 1955
ENDS (MM)	40
DEPTH (MM)	720



Forced
Evaporation



220-240V
Single Phase



LED
Lighting



1 Year
Warranty

Panasonic JAPAN QUALITY



Delivering Reliability And Durability Since 1918

- Panasonic is building on the Japanese tradition of uncompromising quality control worldwide, developing and manufacturing fine products and delivering them to customers everywhere.
- In the pursuance of innovation and convenience, we continue to uphold quality completely.
- The origin of our product development can be found in this commitment, and it is part of Japan's manufacturing DNA that has been passed down in an unbroken line for generations.



Quality You Can Trust

Japan's manufacturing excellence has become a global standard. No matter where we manufacture our products, these products have passed our rigorous and uncompromising quality standards. Panasonic is totally committed to manufacturing premium products of unmatched craftsmanship and superior quality that our customers have come to expect from us.



A Century of Excellence

Panasonic was founded in 1918 by a visionary, Konosuke Matsushita in Osaka, Japan.

Since then the world has changed but our commitment in providing superior quality products of exquisite craftsmanship has remained unchanged.

Today, our brand slogan aptly encapsulates our vision of providing "A Better Life, A Better World".



Introducing Commercial Refrigerators

HP SERIES UPRIGHT & UNDERBENCH

Panasonic



Temp Class 3M1
(-1°C to +5°C)

The Panasonic commercial fridge with forced evaporation and pillarless design is a great choice for the busy, modern kitchen. Now available with flexible options and 2 doors split in various widths leads to maximum utilization of floor space and ideal for storing large items.



DAIRY
REFRIGERATOR



PRODUCE
REFRIGERATOR



SEAFOOD
REFRIGERATOR



MEAT
REFRIGERATOR





SRR-681HP(AUH) | SRR-781HP(AUH)

Single Split Door

	SRR-681HP(AUH)	SRR-781HP(AUH)
HEIGHT (MM)*	1995	1995
TOTAL LENGTH (MM)	620	745
STANDARD DEPTH (MM)	800	800
NET VOLUME (L)	483	610
WEIGHT (KG)	105	110
AMPERAGE (AMP)	10A	10A

* Heights shown are with Castors.



Temp Class 3M1
(-1°C to +5°C)



SRR-1281HP(AUH) | SRR-1581HP(AUH)

2 Door Split Door

	SRR-1281HP(AUH)	SRR-1581HP(AUH)
HEIGHT (MM)*	1995	1995
TOTAL LENGTH (MM)	1210	1460
STANDARD DEPTH (MM)	800	800
NET VOLUME (L)	1080	1329
WEIGHT (KG)	160	180
AMPERAGE (AMP)	10A	10A

* Heights shown are with Castors.



Temp Class 3M1
(-1°C to +5°C)



SRR-1881HP(AUH)

3 Door Split Door

	SRR-1881HP(AUH)
HEIGHT (MM)*	1995
TOTAL LENGTH (MM)	1800
STANDARD DEPTH (MM)	800
NET VOLUME (L)	1669
WEIGHT (KG)	200
AMPERAGE (AMP)	10A

* Heights shown are with Castors.



Temp Class 3M1
(-1°C to +5°C)



Forced
Evaporation



220-240V
Single Phase



Heater
Defrost



Castors Standard
Legs available



Center Pillarless
Design



2 Year Parts
& Labour
Warranty



Product
Lockable

SUR-1261HP(AUH) | SUR-1271HP(AUH)**2 Door Type**

	SUR-1261HP(AUH)	SUR-1271HP(AUH)
	Slimline Type	Large Capacity Type
HEIGHT (MM)*	850	850
TOTAL LENGTH (MM)	1200	1200
STANDARD DEPTH (MM)	600	750
NET VOLUME (L)	214	280
WEIGHT (KG)	78	84
AMPERAGE (AMP)	10A	10A



Temp Class 3M1
(-1°C to +5°C)



* Heights shown are with Castors.

SUR-1561HP(AUH) | SUR-1571HP(AUH)**2 Door Type**

	SUR-1561HP(AUH)	SUR-1571HP(AUH)
	Slimline Type	Large Capacity Type
HEIGHT (MM)*	850	850
TOTAL LENGTH (MM)	1500	1500
STANDARD DEPTH (MM)	600	750
NET VOLUME (L)	296	393
WEIGHT (KG)	86	95
AMPERAGE (AMP)	10A	10A



Temp Class 3M1
(-1°C to +5°C)



* Heights shown are with Castors.

SUR-1861HP(AUH) | SUR-1871HP(AUH)**3 Door Split Door**

	SUR-1861HP(AUH)	SUR-1871HP(AUH)
	Slimline Type	Large Capacity Type
HEIGHT (MM)*	800	850
TOTAL LENGTH (MM)	1800	1800
STANDARD DEPTH (MM)	600	750
NET VOLUME (L)	377	495
WEIGHT (KG)	200	110
AMPERAGE (AMP)	10A	10A



Temp Class 3M1
(-1°C to +5°C)



* Heights shown are with Castors.



LED Lighting



Forced Evaporation



220-240V Single Phase



Heater Defrost



Castors Standard Legs available



Center Pillarless Design



2 Year Parts & Labour Warranty



Product Lockable



BR-1261HP(AUH) | BR-1271HP(AUH)

Underbench Glass Doors

	BR-1261HP(AUH)	BR-1271HP(AUH)
HEIGHT (MM)*	850	850
TOTAL LENGTH (MM)	1200	1200
STANDARD DEPTH (MM)	600	750
NET VOLUME (L)	214	280
WEIGHT (KG)	88	94
AMPERAGE (AMP)	10A	10A

* Heights shown are with Castors.



Temp Class 3M1
(-1°C to +5°C)



BR-1561HP(AUH) | BR-1571HP(AUH)

Underbench Glass Doors

	BR-1561HP(AUH)	BR-1571HP(AUH)
HEIGHT (MM)*	850	850
TOTAL LENGTH (MM)	1500	1500
STANDARD DEPTH (MM)	600	750
NET VOLUME (L)	296	393
WEIGHT (KG)	96	105
AMPERAGE (AMP)	10A	10A

* Heights shown are with Castors.



Temp Class 3M1
(-1°C to +5°C)



BR-1861HP(AUH) | BR-1871HP(AUH)

Underbench Glass Doors

	BR-1861HP(AUH)	BR-1871HP(AUH)
HEIGHT (MM)*	850	850
TOTAL LENGTH (MM)	1800	1800
STANDARD DEPTH (MM)	600	750
NET VOLUME (L)	377	495
WEIGHT (KG)	114	125
AMPERAGE (AMP)	10A	10A

* Heights shown are with Castors.



Temp Class 3M1
(-1°C to +5°C)



LED
Lighting



Forced
Evaporation



220-240V
Single Phase



Heater
Defrost



Castors Standard
Legs available



Center Pillarless
Design



2 Year Parts
& Labour
Warranty



Product
Lockable

SUR-1271HP(AUH)-NN | SUR-1571HP(AUH)-NN

Underbench Solid Doors [Drawer Type]



	SUR-1271HP (AUH)-NN	SUR-1571HP (AUH)-NN
	Slimline Type	Large Capacity Type
HEIGHT (MM)*	850	850
TOTAL LENGTH (MM)	1200	1500
STANDARD DEPTH (MM)	750	750
NET VOLUME (L)	91	138
WEIGHT (KG)	94	105
AMPERAGE (AMP)	10A	10A

* Heights shown are with Castors.



Temp Class 3M1
(-1°C to +5°C)



SUR-1271HP(AUH)-DW | SUR-1571HP(AUH)-DW

Underbench Solid Doors [Door & Drawer Type]



	SUR-1271HP (AUH)-DW	SUR-1571HP (AUH)-DW
	Slimline Type	Large Capacity Type
HEIGHT (MM)*	850	850
TOTAL LENGTH (MM)	1200	1500
STANDARD DEPTH (MM)	750	750
NET VOLUME (L)	185	264
WEIGHT (KG)	99	110
AMPERAGE (AMP)	10A	10A

* Heights shown are with Castors.



Temp Class 3M1
(-1°C to +5°C)



SUR-1871HP(AUH)-NNN

Underbench Solid Doors [Drawer Type]



	SUR-1861HP(AUH)
HEIGHT (MM)*	850
TOTAL LENGTH (MM)	1800
STANDARD DEPTH (MM)	750
NET VOLUME (L)	155
WEIGHT (KG)	125
AMPERAGE (AMP)	10A

* Heights shown are with Castors.



Temp Class 3M1
(-1°C to +5°C)



SUR-1871HP(AUH)-DWW

Underbench Solid Doors [Door & Drawer Type]



	SUR-1871HP(AUH)-DWW
HEIGHT (MM)*	850
TOTAL LENGTH (MM)	1800
STANDARD DEPTH (MM)	750
NET VOLUME (L)	267
WEIGHT (KG)	140
AMPERAGE (AMP)	10A


* Heights shown are with Castors.



Temp Class 3M1
(-1°C to +5°C)



Drawer Series GN Basin Layout



Forced
Evaporation



220-240V
Single Phase



Heater
Defrost



Castors Standard
Legs available



Center Pillarless
Design



2 Year Parts
& Labour
Warranty



Product
Lockable



SUR-1871HPZ-(AUH)

Pizza/Salad Prep Bench

	SUR-1871HPZ-(AUH)
HEIGHT (MM)*	1030
TOTAL LENGTH (MM)	1800
STANDARD DEPTH (MM)	750
NET VOLUME (L)	495
WEIGHT (KG)	140
AMPERAGE (AMP)	10A

* Heights shown are with Castors.




Temp Class 3M1
(-1°C to +5°C)



KEY FEATURES

- Top mount Cutting Board
- No centre pillar for large item storage
- High-quality stainless steel
- Smaller size but larger capacity
- Operational under 43°C
- Designed for easy cleaning
- Anti-bacteria handles and shelves
- Detachable refrigeration system
- Wide temperature setting (-8 ~+10°C)
- Single metal top cover for easy operation
- Removable 300mm x 15mm thick cutting board
- Castors as standard
- 2 year parts and labour warranty
- 2 Part top cover
- Insulated Hinged lid

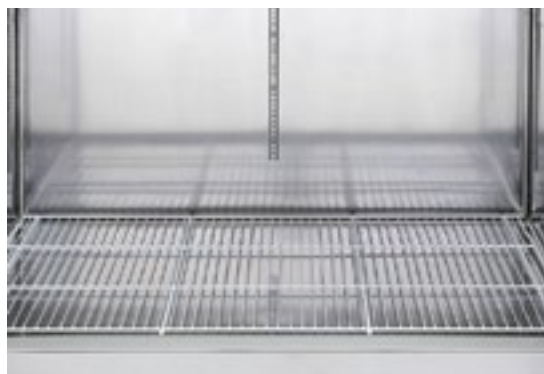

Bottom shelf for better air flow



Round corners for easy cleaning



LED Lighting



Forced Evaporation



220-240V
Single Phase



Heater Defrost



Castors Standard
Legs available



Center Pillarless
Design



2 Year Parts
& Labour
Warranty



Product
Lockable

Introducing Commercial Freezers


HP SERIES UPRIGHT & UNDERBENCH

The Panasonic commercial freezers with forced evaporation and pillarless design is a great choice for the busy, modern kitchen. Now available with flexible options and 2 doors split in various widths leads to maximum utilization of floor space and ideal for storing large items.


Panasonic




Temp Class 3L1
(-18°C to -15°C)

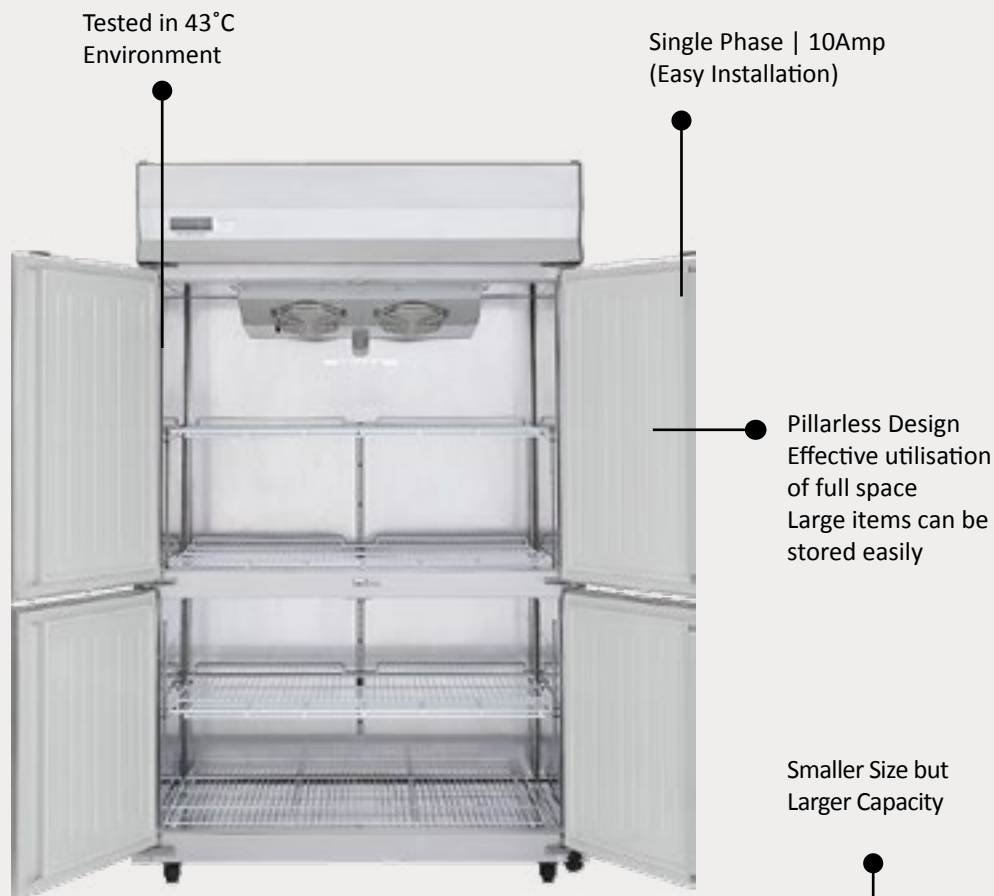


SEAFOOD
FREEZER



MEAT
FREEZER



ICE CREAM
FREEZER

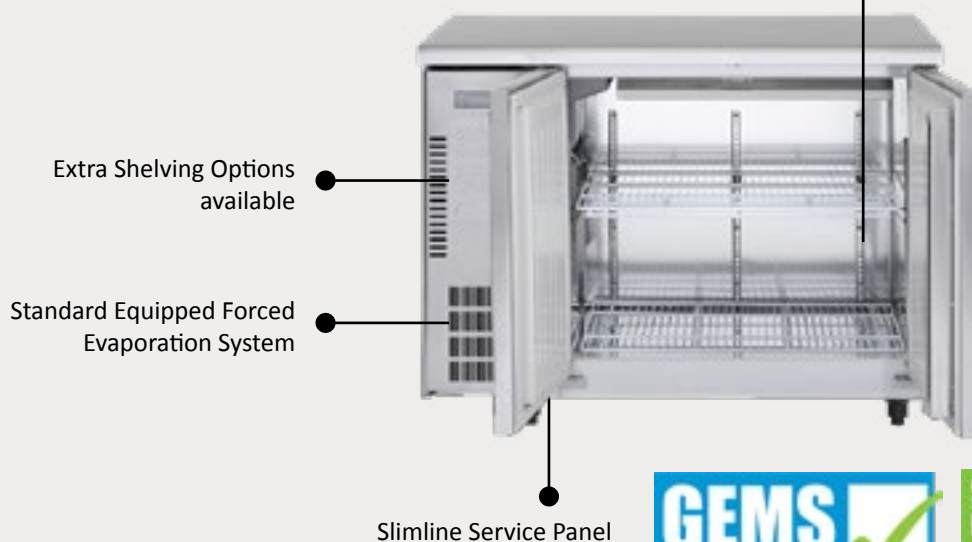



SRF-681HP(AUH) | SRF-781HP(AUH)

Single Split Door

	SRR-681HP(AUH)	SRR-781HP(AUH)
HEIGHT (MM)*	1995	1995
TOTAL LENGTH (MM)	620	745
STANDARD DEPTH (MM)	800	800
NET VOLUME (L)	483	610
WEIGHT (KG)	105	115
AMPERAGE (AMP)	10A	10A

* Heights shown are with Castors.



Temp Class 3L1
(-18°C to -15°C)



SRF-1281HP(AUH) | SRF-1581HP(AUH)

2 Door Split Door

	SRR-1281HP(AUH)	SRR-1581HP(AUH)
HEIGHT (MM)*	1995	1995
TOTAL LENGTH (MM)	1210	1460
STANDARD DEPTH (MM)	800	800
NET VOLUME (L)	1080	1329
WEIGHT (KG)	165	185
AMPERAGE (AMP)	10A	10A

* Heights shown are with Castors.



Temp Class 3L1
(-18°C to -15°C)



SRF-1881HP(AUH)

3 Door Split Door

	SRR-1881HP(AUH)
HEIGHT (MM)*	1995
TOTAL LENGTH (MM)	1800
STANDARD DEPTH (MM)	800
NET VOLUME (L)	1669
WEIGHT (KG)	205
AMPERAGE (AMP)	10A

* Heights shown are with Castors.



Temp Class 3L1
(-18°C to -15°C)



220-240V
Single Phase



Heater
Defrost



Castors Standard
Legs available



Center Pillarless
Design



2 Year Parts
& Labour
Warranty



Product
Lockable



SUF-1271HP(AUH)

2 Door Type

	SUF-1271HP(AUH)
	Slimline Type
HEIGHT (MM)*	850
TOTAL LENGTH (MM)	1200
STANDARD DEPTH (MM)	750
NET VOLUME (L)	280
WEIGHT (KG)	84
AMPERAGE (AMP)	10A

* Heights shown are with Castors.



Temp Class 3L1
(-18°C to -15°C)



SUF-1571HP(AUH)

2 Door Type

	SUF-1571HP(AUH)
HEIGHT (MM)*	850
TOTAL LENGTH (MM)	1500
STANDARD DEPTH (MM)	750
NET VOLUME (L)	393
WEIGHT (KG)	105
AMPERAGE (AMP)	10A

* Heights shown are with Castors.



Temp Class 3L1
(-18°C to -15°C)



SUF-1871HP(AUH)

3 Door Split Door

	SUF-1871HP(AUH)
HEIGHT (MM)*	850
TOTAL LENGTH (MM)	1800
STANDARD DEPTH (MM)	750
NET VOLUME (L)	495
WEIGHT (KG)	120
AMPERAGE (AMP)	10A

* Heights shown are with Castors.



Temp Class 3L1
(-18°C to -15°C)



LED Lighting



Forced Evaporation



220-240V Single Phase



Heater Defrost



Castors Standard Legs available



Center Pillarless Design



2 Year Parts & Labour Warranty



Product Lockable



Introducing Commercial Microwave Ovens

Panasonic

Panasonic offers a range of professional-grade commercial microwaves suitable for various culinary and food service applications. These microwaves are designed to withstand heavy use and deliver consistent performance in commercial kitchens, restaurants, cafes, and other food establishments.



INVERTER





Up to 15 times per day

NN-SF574S

Light Duty Microwave [Flatbed Inverter]

NN-SF574S	
EXTERNAL DIMENSIONS (MM)	W529 x H326 x D422
CAVITY DIMENSIONS (MM)	W529 x H326 x D422
POWER (W)	1000
CAPACITY (L)	27
WEIGHT (KG)	11.7
COMMERCIAL WARRANTY	6 months
AMPERAGE (AMP)	10A



Up to 100 times per day

NE-1037

Medium Duty Microwave

NE-1037	
EXTERNAL DIMENSIONS (MM)	W510 x H306 x D360
CAVITY DIMENSIONS (MM)	W330 x H205 x D330
POWER (W)	1000
CAPACITY (L)	22
WEIGHT (KG)	18.6
COMMERCIAL WARRANTY	1-year on site
AMPERAGE (AMP)	10A



100 to 200 times per day


NE-1878

Heavy Duty Microwave - All Metal Door Inverter


NE-1878	
EXTERNAL DIMENSIONS (MM)	W422 x H337 x D476
CAVITY DIMENSIONS (MM)	W330 x H175 x D310
POWER (W)	1800
CAPACITY (L)	18
WEIGHT (KG)	17.5
COMMERCIAL WARRANTY	2-year on site
AMPERAGE (AMP)	15A



NE-1037

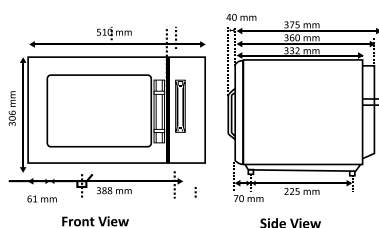

NE-1878

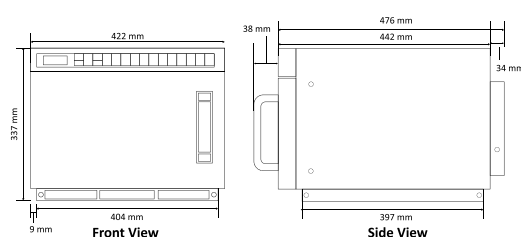



100 to 200 times per day

NE-1853

Heavy Duty Microwave

NE-1853

EXTERNAL DIMENSIONS (MM)	W422 x H377 x D508
CAVITY DIMENSIONS (MM)	W330 x H175 x D310
POWER (W)	1800
CAPACITY (L)	18
WEIGHT (KG)	30
COMMERCIAL WARRANTY	2-year on site
AMPERAGE (AMP)	15A



Cooks frozen pizza in 5 minutes

NE-C1275

Heavy Duty Combination Oven

NE-C1275

EXTERNAL DIMENSIONS (MM)	W600 x H383 x D484
CAVITY DIMENSIONS (MM)	W406 x H217 x D336
POWER (W)	1150 (Microwave) 1800 (Convection Oven) 1800 (Grill)
CAPACITY (L)	29.6
WEIGHT (KG)	41
COMMERCIAL WARRANTY	2-year on site
AMPERAGE (AMP)	15A



Cooks frozen pizza in 2.5 minutes

NE-SCV2


Fast Cook Convection Oven

NE-SCV2


EXTERNAL DIMENSIONS (MM)	W474 x H412 x D565
CAVITY DIMENSIONS (MM)	W270 x H110 x D330
POWER (W)	1200 (Microwave) 1350 (Convection Oven) 1800 (Grill)
CAPACITY (L)	10
WEIGHT (KG)	38.1
COMMERCIAL WARRANTY	2-year on site
AMPERAGE (AMP)	20A (Single Phase)




NE-1853

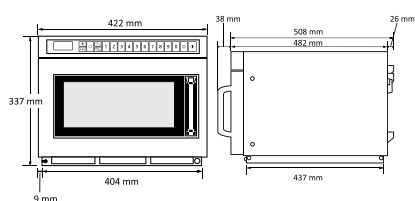

NE-C1275

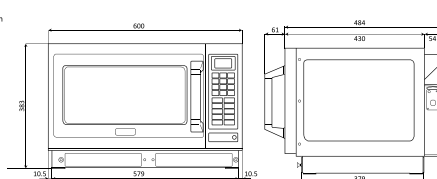

NE-SCV2

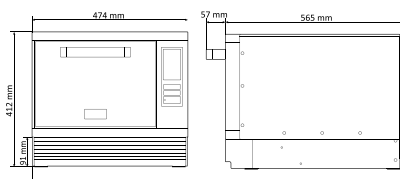

Specification



ACCELERATED CLASS

Performance Characteristics	NE-SCV2	NE-C1275
High	1050W 900W 800W	1350W
Medium	700W 600W 500W	650W / Interval
Low	300W 200W	420W & 240W / Interval
Defrost	-	180W / Interval
Stand	-	Yes
Quartz Grill	High - 1800W Low - 1150W (with 100% Fan Speed)	1840W / 1500W
Hot Air	1465W (180-280°C)	1800W (100-250°C)
Combination Cooking	Combination microwave with grill, hot air, grill convection	Combination microwave with grill, hot air, grill convection
Preheat	150°C [Stand-by Preheat], 180-280°C (Intervals of 10°C)	190°C, 220°C, 240°C
Keypad	Yes (Touch Screen)	Yes
Timer Memory	999 free memory programs	99 free memory programs
Multi-Stage cooking	Yes (3 stages)	Yes (3 stages)
Two-level operation	-	-
Timer (electronic)	N/A	max. 100min
Door Hinge	bottom	left side
Adjustable Alarm	Yes	Yes
Number of Magnetrons	2 Magnetrons	2 Magnetrons
Air filter on the front	Yes	Yes
Stackable	Yes	-
Self diagnostics	Yes	Yes
Cycle counter	Yes	-
Cabinet and cavity finish stainless steel with ceramic base	Yes	Yes
Cavity Capacity	10 Litre	29.6 Litre
Cavity Dimensions (WxDxH)	270 x 330x 110 mm	406 x 336 x 217 mm
Outer Dimensions (WxDxH)	474 x 565 x 412 mm	600 x 484 x 383 mm
Required Power	3600W / 15.8A	2900W / 12.2A
Supply voltage	230-240V / 50Hz	230-240V / 50Hz
Plug Type	20amp	15amp
Wet/net	38.1kg	41kg
Accessories supplied	Hand Paddle, Ceramic Tray, Silicon Matt, Wire Rack, Memory Card	1 shelf, 1 ceramic plate, 1 SD card



1800 W CLASS

1000 W CLASS

Performance Characteristics	NE-1878	NE-1853	NE-1037
High	1800W	1800W	1000W
Medium	900W / Interval	60-90%	500W / Interval
Low	340W / Interval	25-50%	-
Defrost	170W / Interval	340W	340W / Interval
Stand	-	Yes	-
Quartz Grill	-	-	-
Hot Air	-	-	-
+10 / +20 seconds	-	Yes	-
Keypad	-	Yes	Yes
Timer Memory	30 Free Memory Programs	30 free memory programs	10 free memory programs
Multi-Stage cooking	Yes (5 stages)	Yes (5 stages)	Yes (3 stages)
Two-level operation	-	-	-
Timer (electronic)	max. 60min	max. 30min	max. 99min
Door Hinge	bottom	left side	left side
Adjustable Alarm	Yes	Yes	Yes
Number of Magnetrons	4 Magnetrons	2 Magnetrons	1 Magnetrons
Air filter on the front	Yes	Yes	-
Stackable	-	Yes	-
Self diagnostics	Yes	Yes	Yes
Cycle counter	Yes	-	-
Cabinet and cavity finish stainless steel with ceramic base	Yes	Yes	Yes
Cavity Capacity	18 Litre	18 Litre	22 Litre
Cavity Dimensions (WxDxH)	330 x 310 x 175 mm	330 x 310 x 175 mm	330 x 330 x 205mm
Outer Dimensions (WxDxH)	422 x 476 x 337 mm	422 x 508x 377 mm	510 x 360x 306 mm
Required Power	2650W / 11.6A	2830W / 12.3A	1490W / 6.6A
Supply voltage	230V / 50Hz	240V / 50Hz	240V / 50Hz
Plug Type	15amp	15amp	10amp
Wet/net	17.5kg	30kg	18.6kg



Introducing

Rice Cookers

Panasonic

Panasonic's commercial rice cookers have been carefully designed to ensure evenly cooked rice time and time again in the most demanding restaurant environments.

Uniform Cooking by
Triple Coil

Micro Switch Control for
More Durability

Product Compliant to
Australian Standards

Double Thermal Fuse
for Superior Safety

Internationally used across the
Food Service Sector





23 cups

SR-GA421F

Commercial Rice Cookers

	SR-GA421F
HEIGHT (MM)	289
TOTAL LENGTH (MM)	367
STANDARD DEPTH (MM)	424
CAPACITY (L)	4.2
WARRANTY (YEAR)	1
AMPERAGE (AMP)	10A



30 cups

SR-GA541F

Commercial Rice Cookers

	SR-GA541F
HEIGHT (MM)	338
TOTAL LENGTH (MM)	466
STANDARD DEPTH (MM)	558
CAPACITY (L)	5.4
WARRANTY (YEAR)	1
AMPERAGE (AMP)	10A



40 cups

SR-GA721F

Commercial Rice Cookers

	SR-GA721F
HEIGHT (MM)	366
TOTAL LENGTH (MM)	466
STANDARD DEPTH (MM)	558
CAPACITY (L)	7.2
WARRANTY (YEAR)	1
AMPERAGE (AMP)	15A



20 cups

SR-UH36

Commercial Rice Cookers

	SR-UH36
HEIGHT (MM)	347
TOTAL LENGTH (MM)	428
STANDARD DEPTH (MM)	384
CAPACITY (L)	3.61
WARRANTY (YEAR)	1
AMPERAGE (AMP)	10A



Triple Coil for Uniform Cooking



Micro switch Control for More Durability*



Double Thermal Fuse for superior safety



Stainless Steel Lid



1 Year Warranty



Scoop Holder



Steam Vent



Dew Collector



Side, bottom & Top Heater

Specification



Model Number	SR-GA721F	SR-GA541F	SR-GA421F	SR-UH36
Power Source	240V / 15A	240V / 10A	240V / 10A	230V/10A
Power Consumption	2500W	1800W	1550W	1400W
Pan	Non-stick	Non-stick	Non-stick	Anodised aluminium
Pan Thickness	1.95mm	1.95mm	1.95mm	1.95mm
Rice cooking	Yes	Yes	Yes	Yes
Capacity	7.2L (40 cups)	5.4L (30 cups)	4.2L (23 cups)	3.6L (20 cups)
Keep warm	5hr	5hr	5hr	12hr
Dimension (H x W x D) mm	366 x 466 x 558	366 x 466 x 558	289 x 367 x 424	347 x 428 x 384
Weight	15.0kg	13.5kg	6.4kg	8.2kg
Color	Silver	Silver	Silver	Silver
Accessories	Measuring cup. Extra bowl available as spare part on request	Measuring cup. Extra bowl available as spare part on request	Measuring cup. Extra bowl available as spare part on request	Measuring cup. Extra bowl available as spare part on request



Triple Coil for
Uniform Cooking



Micro switch
Control for More
Durability*



Double Thermal
Fuse for superior
safety



Stainless Steel Lid



Scoop Holder



Steam Vent



Dew Collector



Side, bottom &
Top Heater



Side heater



Flexible

Rental Options

Benefits of Rent-Try-Buy

- » Renting means less cost upfront - freeing up more working capital for running your business
- » Rental payments are 100% tax deductible
- » Off balance sheet finance doesn't impact your borrowing ability



01

APPLY
for rental

It's easy, contact us on
phone 1300 740 805
or online at
Rental@hussmann.com.



02

CHOOSE
your equipment

Select the suitable
equipment, duration
of rental and delivery
details.



03

ORDER
your equipment

Once your request is
approved, your order
will be processed.




04

START
finance agreement


Start your rental
agreement.

Profile Drawing: Doored Chiller Range


BV520 W VS

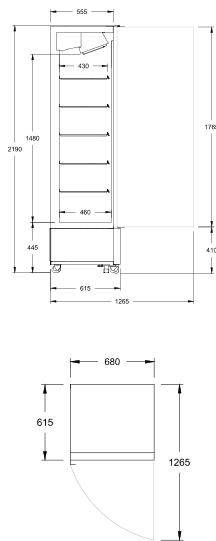


BV770 W VS

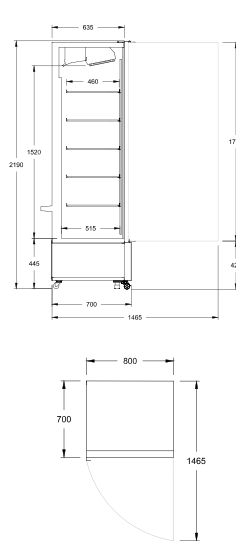

BV1300 W VS

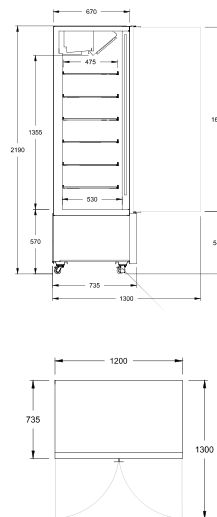


BV1600 W VS

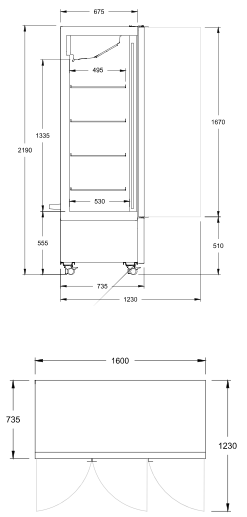


Profile Drawing: Multideck Range


H2TMS

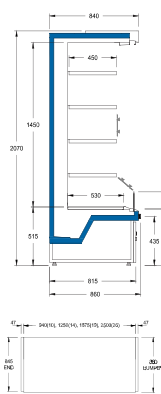


H2TMSD

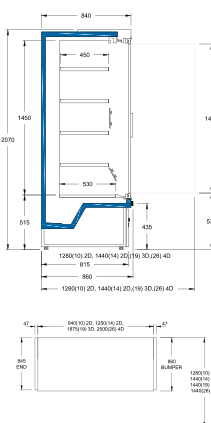


H2TLDS

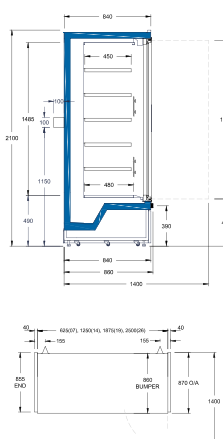

H2TDDS

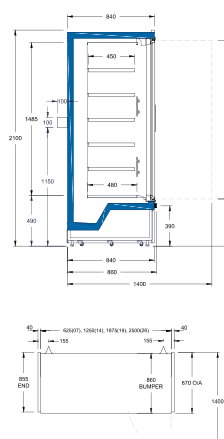


H2TH

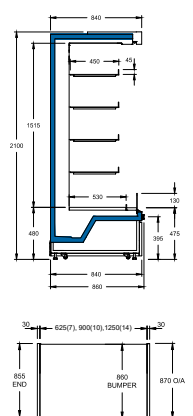


Profile Drawing: Semi-vertical Range


SGN141S

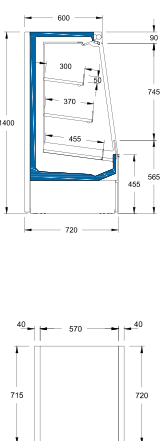


SGN152S

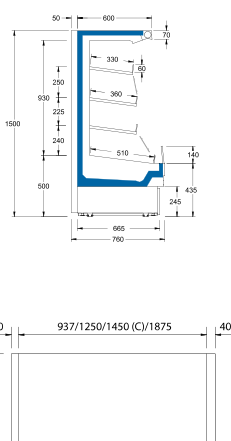

SGND153S HINGED

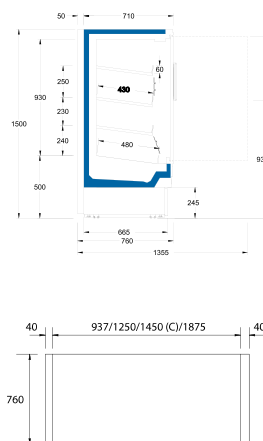


SGND153S SLIDING

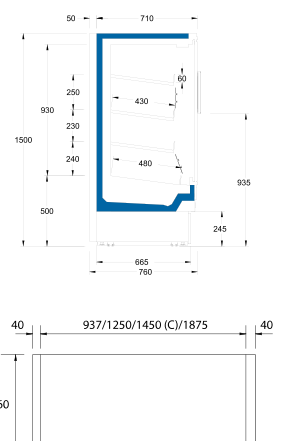


Profile Drawing: Semi-vertical Range


SGN192S

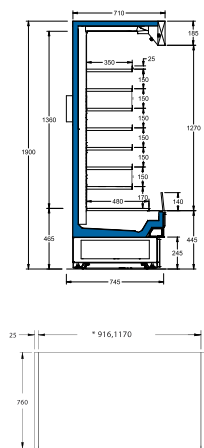

SGND193S HINGED

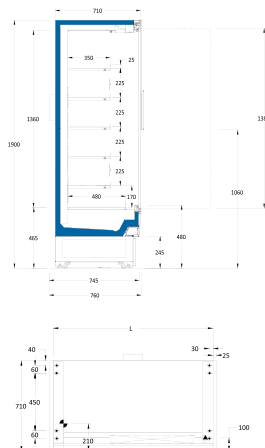


SGND193S SLIDING

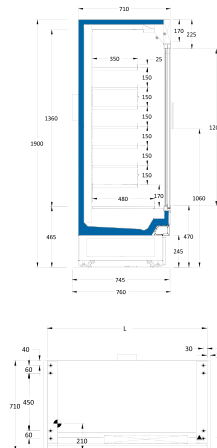


Profile Drawing: Commercial Refrigerators Range


SRR-681HP(AUH)

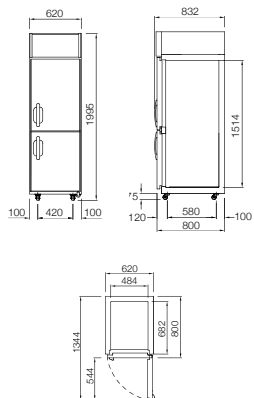


SRR-781HP(AUH)

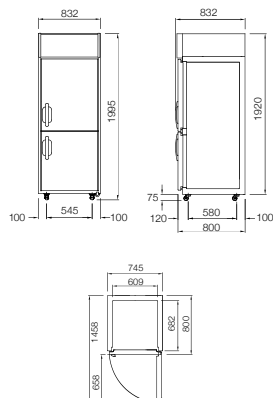


SRR-1281HP(AUH)

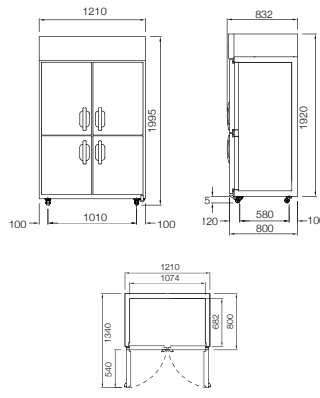


SRR-1581HP(AUH)

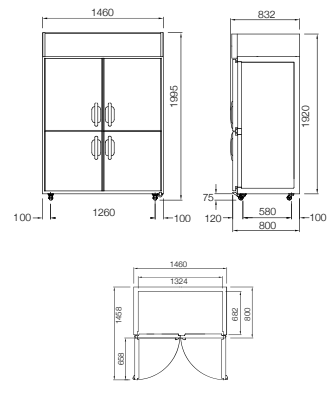


SRR-1881HP(AUH)

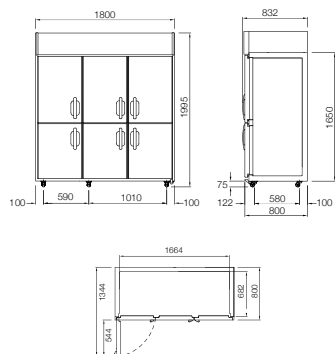


SUR-1261HP(AUH)

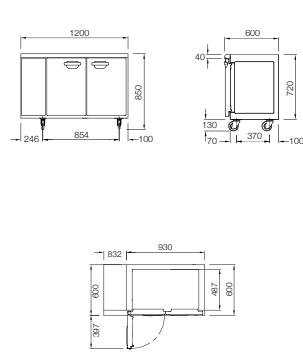


SUR-1271HP(AUH)

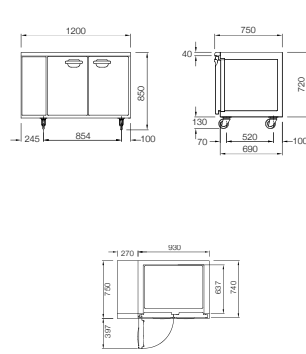


SUR-1561HP(AUH)

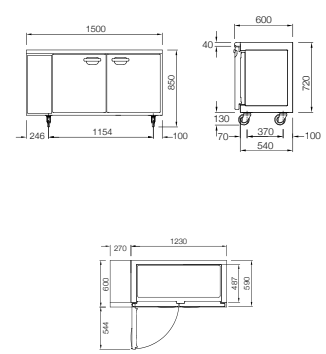


SUR-1861HP(AUH)



SUR-1571HP(AUH)



SUR-1871HP(AUH)





BEVERAGES

HOT CASE

ORDER HERE

ESPRESSO		LATTE	
KAFKA	2.50 / 3.10	WALKER L	1.90
KAFKA SBT	1.50 / 2.00	ATVULS	1.80
CHOCOLATE	2.50	LEMONADE	1.50
EXTRA SAHNE	1.40	CHARPITA	2.00
EXTRA SHOT	1.30	CORA COLA 0.2	2.40
EXTRA / SOJA	3.90	FRUIT KOLA 0.2	2.40
HOT CHOCOLATE	3.90	PETER PAN 0.2	4.90



HOT CASH



Contact Details - Australia

Customer Service

panasonic@husmann.com

Warranty & Tech Support

warranty.aus@husmann.com

Spare Parts

spares_aus@husmann.com

AUSTRALIA

Head Office: **Sydney**

Address: 66 Glendenning Road, Glendenning,
NSW 2761 Australia

Phone: +61 2 8805 0400

Web: husmann.com.au

NEW ZEALAND

Head Office: **Auckland**

Address: 2-6 Niall Burgess Road,
Mt Wellington, Auckland, 1060 New Zealand

Phone: 0800 473 374

Web: mcalpinehusmann.co.nz