


HUSSmann®

PANASONIC TRANSCRITICAL CO₂ OUTDOOR CONDENSING UNIT WITH NATURAL REFRIGERANT



Innovating Climate Solutions for A Better Future

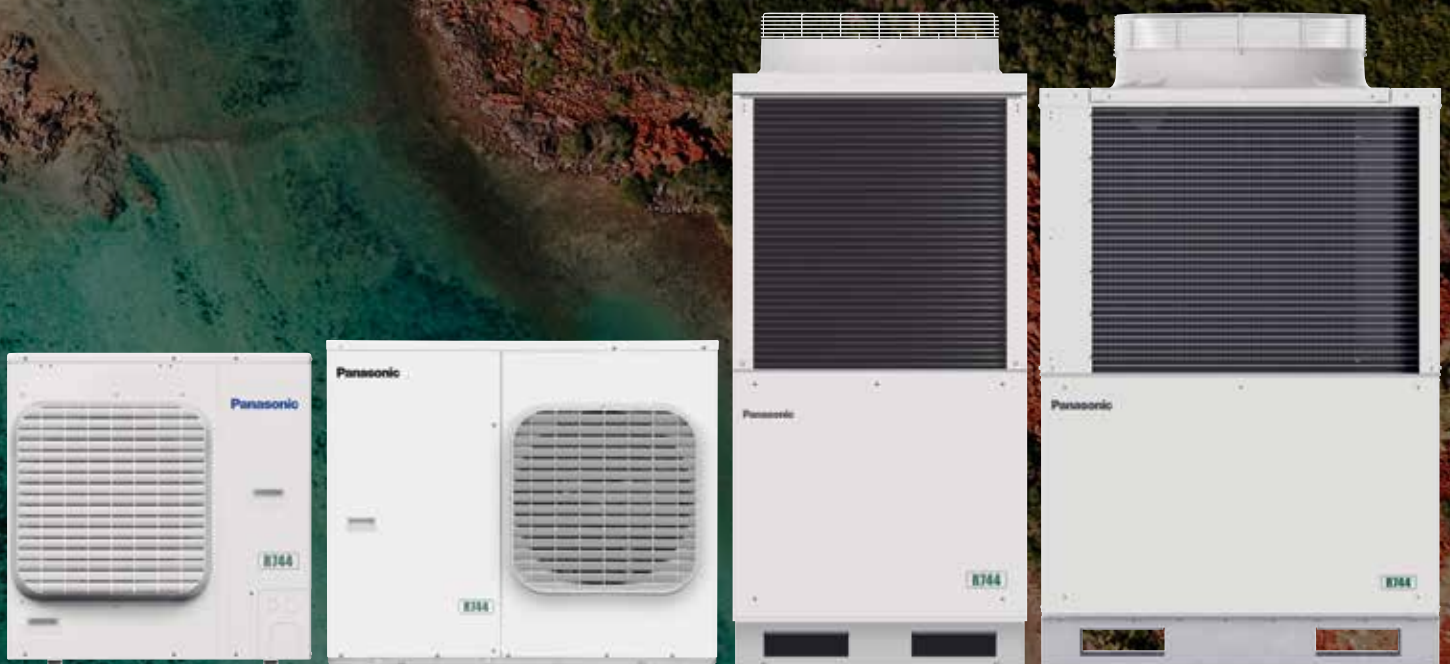

OUR COMMITMENT

At Hussmann, we are committed to sustainability and supporting the adoption of natural refrigerants in our industry. Our Panasonic CO₂ condensing units reflect our commitment to natural refrigerants.

The Panasonic Transcritical CO₂ technology reduces CO₂ emissions by up to 67%[#], ensuring optimal temperature control, preventing costly breakdowns and product wastage, while keeping food fresh for supermarkets, convenience stores, and petrol stations.



P Series + Transcritical CO₂ *

BUNDLE OFFER

Price Match and Save

We will price match Panasonic TCO₂ to conventional HFC system



Accelerate Formats to Transcritical Systems

- ✓ Panasonic Transcritical CO₂ condensing unit at the same price of HFC unit
- ✓ Available in 2HP, 4HP, 10HP and 20HP



Further Savings through Rebates

- ✓ Rebates of up to \$7.5k in VIC & NSW
- ✓ Rebates for condensing units available when a cool room is involved in VIC (between \$1.5k to \$2.5k).
- ✓ Rebates for the PMM23 Liquor case (taller case height allowing Riesling bottles)



Training & Development

- ✓ Hussmann will support and train your team on the safe application of CO₂
- ✓ Seamless transition to natural refrigerants made easier to adopt by store teams



*Exclusive for sales in Australia only in conjunction with the PMM Multideck with doors.

Quality that lasts in All Sectors

Optimise your Total Cost in Ownership (TCO) and Total Value of Ownership (TVO) for the whole life of your equipment - and that's not a short time!



Panasonic Saves Your Money

- High energy efficiency
- Small floor space
- Low total operating costs
- Long service life with components designed for 10+ years of operation



Panasonic Gives You Time

- Low effort with easy-to-clean design and materials
- Maximum ergonomic efficiency for effortless work processes
- Almost maintenance-free



Panasonic Ensures Your Goods Are Operationally Efficient


- High efficiency compressors are guaranteed to deliver high performance all year around
- Designed with low sound decibels for smaller spaces
- Optional anti corrosion coating for outdoor and high humidity applications



Panasonic Focuses On Sustainability

- Equipments with very low energy consumption
- Natural refrigerant

Features

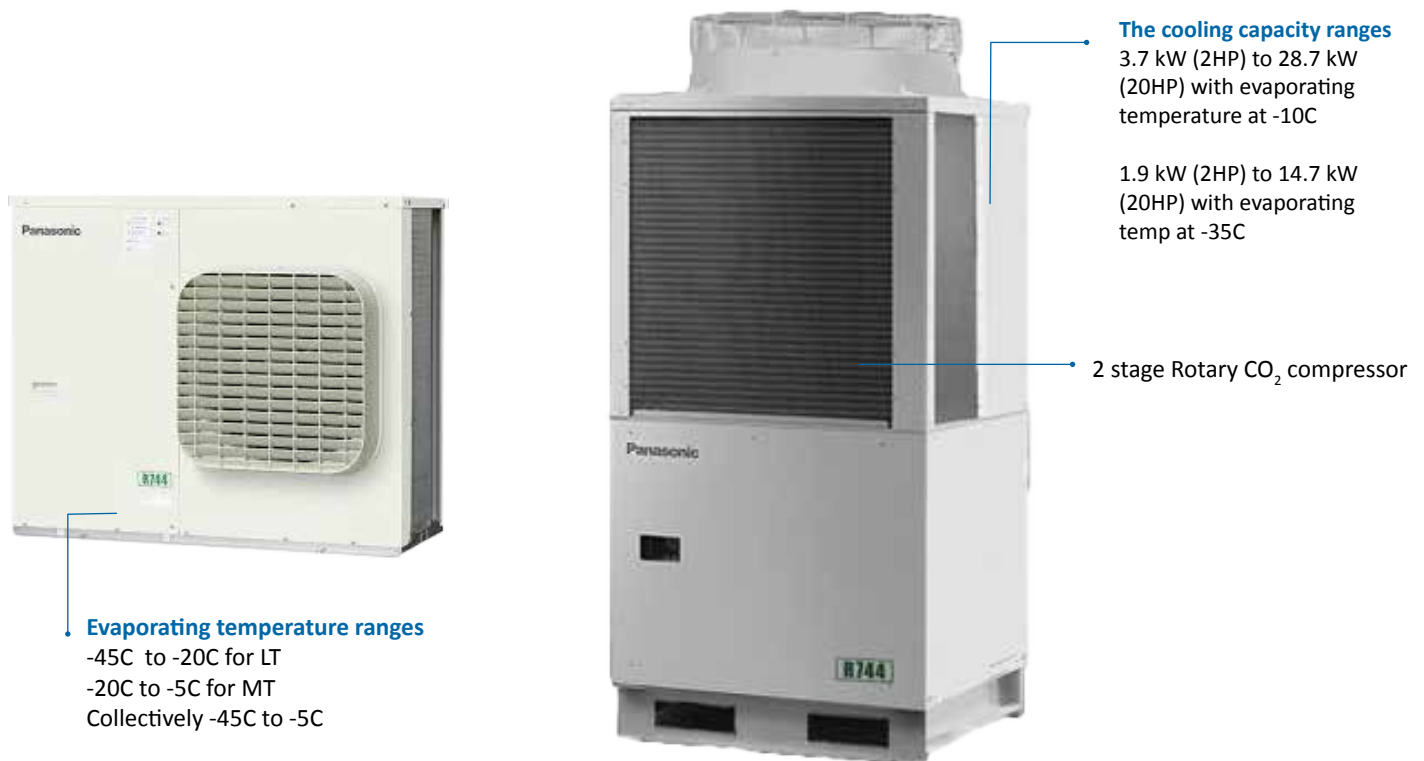

Evaporating temperature ranges

-45C to -20C for LT
-20C to -5C for MT
Collectively -45C to -5C

The cooling capacity ranges

3.7 kW (2HP) to 28.7 kW (20HP) with evaporating temperature at -10C

1.9 kW (2HP) to 14.7 kW (20HP) with evaporating temp at -35C

2 stage Rotary CO₂ compressor

Benefits

Energy saving



Natural CO₂ / R744.

R744 refrigerant provides higher energy saving and lower CO₂ emission compared to R404A. Zero ODP and GWP=1 means natural substance.



High efficiency compressor.

Powerful 2-stage CO₂ rotary compressor by Panasonic. It delivers high performance all year around.

High performance and indoor air quality



Optional anti corrosion coating.

Selectable fin type with or without an anti corrosion coating. The anti corrosion coating prevents salt damage for a longer lifespan.



Super quiet.

Systems operate extremely quiet and lower than regulatory standards. Minimum 33dB(A) @10m with OCU-CR400VF8(SL).



Operating range up to 43 °C.

The system envelops for ambient temperature tolerance extends to 43 °C, allowing for installation in hot climates. We also offer an adiabatic solution for even hotter temperatures if required.



AUTOMATIC FAN

Automatic fan operation.

Microprocessor control automatically adjusts the outdoor fan speed in CO₂ systems for efficient operation.



HEAT RECOVERY PORT

Heat recovery port.

The heat recovery port is available to cut running costs as optional. By utilising exhausted heat generated by refrigeration to the energy source for heating.

Available on models:

OCU-CR400VF8A 4 HP MT/LT
OCU-CR1000VF8A 10 HP MT/LT
OCU-CR2000VF8A 20 HP MT/LT

High connectivity



BMS connectivity.

The system can be supervised with major monitoring system.

CO₂ condensing units

CR Series — 2HP



| TYPICAL USAGE EXAMPLE * | MT OCU | LT OCU |
|----------------------------------|-----------|-----------|
| | 2HP (4kW) | 2HP (4kW) |
| OCU Capacity in (kW) | 3.70 | 1.92 |
| OCU Capacity 70% (kW) | 2.59 | 1.34 |
| No. of cabinets can be connected | 4 | 1 |

Medium Temperature (MT) based on 4 door cabinet PMM20F3T-4M1-1
Low Temperature (LT) based on 3 door cabinet PGL20F3R-3Z1-1

Transcritical Co2 Condensing Unit 2HP DUAL TEMP MT/LT





| | | |
|---------------------------------------|----------------|-----------------|
| Model | OCU-CR200VF5A | |
| | Normal coating | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 1.85 ~ 3.70 |
| Cooling capacity at ET -35°C AT 32°C | kW | 0.96 ~ 1.92 |
| Dimensions (H x W x D) | mm | 930 x 900 x 437 |
| Weight | kg | 70 |
| Power Supply | Voltage | 220/230/240 |
| | Phase | Single phase |
| | Frequency | 50 |

Transcritical Co2 Condensing Unit 2HP DUAL TEMP MT/LT

| | | |
|---------------------------------------|--------------------|-----------------|
| Model | OCU-CR200VF5ASL | |
| | Salt proof coating | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 1.85 ~ 3.70 |
| Cooling capacity at ET -35°C AT 32°C | kW | 0.96 ~ 1.92 |
| Dimensions (H x W x D) | mm | 930 x 900 x 437 |
| Weight | kg | 170 |
| Power Supply | Voltage | 220/230/240 |
| | Phase | Single phase |
| | Frequency | 50 |

CO₂ condensing units

CR Series — 4HP



| TYPICAL USAGE EXAMPLE * | MT OCU | LT OCU |
|----------------------------------|--------------|-----------|
| | 4HP (7.5 kW) | 4HP (4kW) |
| OCU Capacity in (kW) | 7.64 | 3.80 |
| OCU Capacity 70% (kW) | 5.35 | 2.66 |
| No. of cabinets can be connected | 7 | 2 |

Medium Temperature (MT) based on 4 door cabinet PMM20F3T-4M1-1
Low Temperature (LT) based on 3 door cabinet PGL20F3R-3Z1-1

Transcritical Co2 Condensing Unit 4HP MT

| | | |
|---------------------------------------|----------------|------------------|
| Model | OCU-CR400VF8 | |
| | Normal coating | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 3.45 ~ 6.90 |
| Cooling capacity at ET -35°C AT 32°C | kW | - |
| Dimensions (H x W x D) | mm | 948 x 1143 x 609 |
| Weight | kg | 136 |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |

Transcritical Co2 Condensing Unit 4HP MT

| | | |
|---------------------------------------|--------------------|------------------|
| Model | OCU-CR400VF8SL | |
| | Salt proof coating | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 3.45 ~ 6.90 |
| Cooling capacity at ET -35°C AT 32°C | kW | - |
| Dimensions (H x W x D) | mm | 948 x 1143 x 609 |
| Weight | kg | 136 |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |

Transcritical Co2 Condensing Unit 4HP MT/LT

| | | |
|---------------------------------------|----------------|------------------|
| Model | OCU-CR400VF8A | |
| | Normal coating | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 3.82 ~ 7.64 |
| Cooling capacity at ET -35°C AT 32°C | kW | 3.80 |
| Dimensions (H x W x D) | mm | 948 x 1143 x 609 |
| Weight | kg | 149 |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |

Transcritical Co2 Condensing Unit 4HP DUAL TEMP MT/LT

| | | |
|---------------------------------------|--------------------|------------------|
| Model | OCU-CR400VF8ASL | |
| | Salt proof coating | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 3.82 ~ 7.64 |
| Cooling capacity at ET -35°C AT 32°C | kW | 3.80 |
| Dimensions (H x W x D) | mm | 948 x 1143 x 609 |
| Weight | kg | 149 |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |

CO₂ condensing units

CR Series — 10HP



TYPICAL USAGE EXAMPLE *

| | MT OCU | LT OCU |
|----------------------------------|-------------|------------|
| | 10HP (15kW) | 10HP (8kW) |
| OCU Capacity in (kW) | 14.98 | 7.61 |
| OCU Capacity 70% (kW) | 10.49 | 5.33 |
| No. of cabinets can be connected | 14 | 5 |

Medium Temperature (MT) based on 4 door cabinet PMM20F3T-4M1-1
Low Temperature (LT) based on 3 door cabinet PGL20F3R-3Z1-1

Transcritical Co2 Condensing Unit 10HP MT

| | | |
|---------------------------------------|----------------|------------------|
| Model | OCU-CR1000VF8 | |
| | Normal coating | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 6.96 ~ 13.92 |
| Cooling capacity at ET -35°C AT 32°C | kW | - |
| Dimensions (H x W x D) | mm | 1941 x 890 x 890 |
| Weight | kg | 293 |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |

Transcritical Co2 Condensing Unit 10HP MT

| | | |
|---------------------------------------|--------------------|------------------|
| Model | OCU-CR1000VF8SL | |
| | Salt proof coating | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 6.96 ~ 13.92 |
| Cooling capacity at ET -35°C AT 32°C | kW | - |
| Dimensions (H x W x D) | mm | 1941 x 890 x 890 |
| Weight | kg | 293 |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |

Transcritical Co2 Condensing Unit 10HP DUAL TEMP MT/LT

| | | |
|---------------------------------------|----------------|------------------|
| Model | OCU-CR1000VF8A | |
| | Normal coating | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 7.49 ~ 14.98 |
| Cooling capacity at ET -35°C AT 32°C | kW | 3.81 ~ 7.61 |
| Dimensions (H x W x D) | mm | 1941 x 890 x 890 |
| Weight | kg | 320 |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |

Transcritical Co2 Condensing Unit 10HP MT/LT

| | | |
|---------------------------------------|--------------------|------------------|
| Model | OCU-CR1000VF8ASL | |
| | Salt proof coating | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 7.49 ~ 14.98 |
| Cooling capacity at ET -35°C AT 32°C | kW | 3.81 ~ 7.61 |
| Dimensions (H x W x D) | mm | 1941 x 890 x 890 |
| Weight | kg | 320 |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |

Introducing the new 20HP Transcritical CO₂ Condensing Unit

| TYPICAL USAGE EXAMPLE * | MT OCU | LT OCU |
|----------------------------------|-------------|-------------|
| | 20HP (30kW) | 20HP (16kW) |
| OCU Capacity in (kW) | 28.76 | 14.61 |
| OCU Capacity 70% (kW) | 20.13 | 10.23 |
| No. of cabinets can be connected | 27 | 10 |

Medium Temperature (MT) based on 4 door cabinet PMM20F3T-4M1-1
Low Temperature (LT) based on 3 door cabinet PGL20F3R-3Z1-1

AVAILABLE
NOW



Transcritical Co2 Condensing Unit 20HP DUAL TEMP MT/LT

| | | |
|---------------------------------------|----------------|-------------------|
| Model | OCU-CR2000VF8A | |
| | Normal coating | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 7.19 ~ 28.76 |
| Cooling capacity at ET -35°C AT 32°C | kW | 3.65 ~ 14.61 |
| Dimensions (H x W x D) | mm | 1941 x 1190 x 890 |
| Weight | kg | 494 |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |

Scan for more
on 20HP.



Adiabatic Cooling Solution Outdoor refrigerant Unit



Introducing the Panasonic Transcritical CO₂ Outdoor Condensing Unit (OCU) Adiabatic Cooling Solution, specifically designed for the 2HP, 4HP and 10HP TCO₂ OCU.

This innovative system leverages the natural refrigerant CO₂, offering an environmentally friendly and efficient solution for commercial refrigeration needs. The adiabatic cooling technology enhances performance, especially in high ambient temperature conditions, making it an ideal choice for supermarkets, convenience stores, and other commercial applications.

Features

Transcritical CO₂ Refrigerant

Utilises CO₂, a natural refrigerant with low global warming potential (GWP), aligning with global sustainability goals and regulatory requirements.

Adiabatic Cooling Technology

Equipped with adiabatic cooling capabilities, the units optimise cooling efficiency by reducing the temperature of the refrigerant in high ambient conditions, ensuring reliable performance and energy savings.

High Efficiency Performance

Designed for optimal energy efficiency, reducing operational costs while maintaining effective cooling.

Robust Build Quality

Engineered to withstand outdoor conditions, the unit features durable construction and weather-resistant materials, ensuring longevity and reliable operation.

Smart Control System

Integrated smart controls provide real-time monitoring and management, enhancing system performance and simplifying maintenance.

Versatile Application

Ideal for a range of applications, including commercial refrigeration systems in supermarkets, restaurants, and food storage facilities.

Compact Design

The unit's compact footprint allows for easy installation in various settings without compromising space, making it suitable for urban environments.





| Adiabatic Cooling Solution 2HP | | |
|---------------------------------------|-----------|-------------|
| Model | 96E14-005 | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 1.85 ~ 3.70 |
| Cooling capacity at ET -35°C AT 32°C | kW | 0.96 ~ 1.92 |
| Dimensions (H x W x D) | mm | TBA |
| Weight | kg | TBA |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |



| Adiabatic Cooling Solution 4HP | | |
|---------------------------------------|-----------|-------------|
| Model | 96E14-009 | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 3.45 ~ 6.90 |
| Cooling capacity at ET -35°C AT 32°C | kW | - |
| Dimensions (H x W x D) | mm | TBA |
| Weight | kg | TBA |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |



| Adiabatic Cooling Solution 10HP | | |
|---------------------------------------|-----------|--------------|
| Model | 96E14-002 | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 6.96 ~ 13.92 |
| Cooling capacity at ET -35°C AT 32°C | kW | - |
| Dimensions (H x W x D) | mm | TBA |
| Weight | kg | TBA |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |



| Adiabatic Cooling Solution 20HP | | |
|---------------------------------------|-----------|--------------|
| Model | TBC | |
| Cooling capacity at ET -10°C AT 32°C: | kW | 7.19 ~ 28.76 |
| Cooling capacity at ET -35°C AT 32°C | kW | 3.65 ~ 14.61 |
| Dimensions (H x W x D) | mm | TBA |
| Weight | kg | TBA |
| Power Supply | Voltage | 380/400/415 |
| | Phase | Three phase |
| | Frequency | 50 |

Benefits

Save energy and costs



The energy-efficient design and adiabatic cooling technology lead to lower energy bills and reduced operational costs over time.

Improved Performance in High Temps



The adiabatic function ensures that the unit maintains optimal performance even in extreme weather conditions, providing consistent cooling.

Easy Integration



The compact design and smart control capabilities facilitate seamless integration into existing refrigeration systems, reducing installation time and costs.

Case studies from across the globe

INSTALLATION

Ambey's Big Apple (Fruit & Vegetables)
Sydney, Australia

| UNITS AND SIZES | QUANTITY |
|----------------------------|----------|
| Panasonic TCO2 10 HP Units | 2 |
| OCU-CR-1000VF8A | 2 |



10HP Units with Adiabatic

INSTALLATION

Supermarket (Coop) Distribution Centre
Japan

| UNITS AND SIZES | QUANTITY |
|-----------------|----------|
| OCU-CR1501MVF | 1 |
| OCU-CR2001MVF | 3 |
| Cooling Coil | 6 |
| Freezer 30Kw | |
| Chiller 20Kw | |



Freezer Room



Condensing Unit

INSTALLATION
Supermarket
Japan

| UNITS AND SIZES | QUANTITY |
|-----------------|----------|
| OCU-CR2001MVF | 1 |
| OCU-CR3000MVF | 2 |
| OCU-CR4000MVF | 2 |



INSTALLATION
Supermarket
Japan

| UNITS AND SIZES | QUANTITY |
|-----------------|----------|
| OCU-CR1001VF | 5 |
| OCU-CR1501MVF | 2 |
| OCU-CR2001MVF | 8 |









Choose the sustainable green solution by Panasonic

Environmentally friendly CO₂ condensing units - CR Series and medium temperature solutions.



CO₂ condensing units - CR Series

| 2HP MT/LT Type | 4HP MT Type | 4HP MT/LT Type | 10HP MT Type | 10 HP MT/LT Type | NEW 20HP MT/LT Type |
|---|---|---|---|---|---|
|  |  |  |  |  |  |
| Capacity range (kW) | | | | | |
| 4 (MT) / 2 (LT) | 7.5 | 8 (MT) / 4 (LT) | 15 | 16 (MT) / 8 (LT) | 29 (MT) / 15 (LT) |
| Low temperature | | | | | |
| ✓ | — | ✓ | — | ✓ | ✓ |
| Medium temperature | | | | | |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| High Temperature | | | | | |
| — | — | — | — | — | — |
| Heat recovery port | | | | | |
| — | — | ✓ | — | ✓ | ✓ |
| ET (evaporation temperature) set points range | | | | | |
| -45 ~ -5 °C | -20 ~ -5 °C | -45 ~ -5 °C | -20 ~ -5 °C | -45 ~ -5 °C | -45 ~ -5 °C |
| Room size example (m ³)* | | | | | |
| 40 (MT) / 10 (LT) | 80 | 80 (MT) / 20 (LT) | 200 | 200 (MT) / 50 (LT) | 300 (MT) / 75 (LT) |

* Room size is reference. Please contact to authorized Panasonic dealer for calculation.

Why CO₂? Natural refrigerant

The Ozone protection and synthetic greenhouse Gas Management Act 1989 (OPSGG), along with the Kigali Amendments, supports the international climate commitments on greenhouse gases leads the transition to climate friendly, HFC-free technologies.

Carbon dioxide (R744) is regaining its place in the refrigeration world. Driven by environmental concerns, legislation now requires increased adoption of 'alternative' refrigerants, such as CO₂.

CO₂ is an environmentally-friendly solution, with zero ODP and "GWP" (Global Warming Potential)=1 means natural substance in the atmosphere.

In Europe a step-by-step HFC reduction has been in place since the F-Gas regulation was introduced in 2015.

Countries all over the world have actively been preparing to enact the necessary domestic legislation to implement the agreement to reduce the use of HFCs. In Australia, step by step HFC reductions have been implemented since the Kigali Amendments were enacted in 2017.

Panasonic is now able to provide a solution globally with CO₂ refrigeration systems to prevent global warming and to support environment-friendly retail operations.


The following table shows how well R744 (CO₂) performs regarding environmental impact and safety.

ODP (Ozone Depletion Potential) = 0 - GWP (Global Warming Potential) = 1

| | Next generation refrigerant | | | Current refrigerant | |
|---------------------|-----------------------------|-----------------|-----------|---------------------|---------------|
| | CO ₂ | Ammonia | Isobutane | R410A | R404A |
| ODP | 0 | 0 | 0 | 0 | 0 |
| GWP | 1 | 0 | 4 | 2 090 | 3 920 |
| Flammability | Non flammable | Light flammable | Flammable | Non flammable | Non flammable |
| Toxicity | No | Yes | No | No | No |

Comparison of CO₂ emissions

Unit: t/year

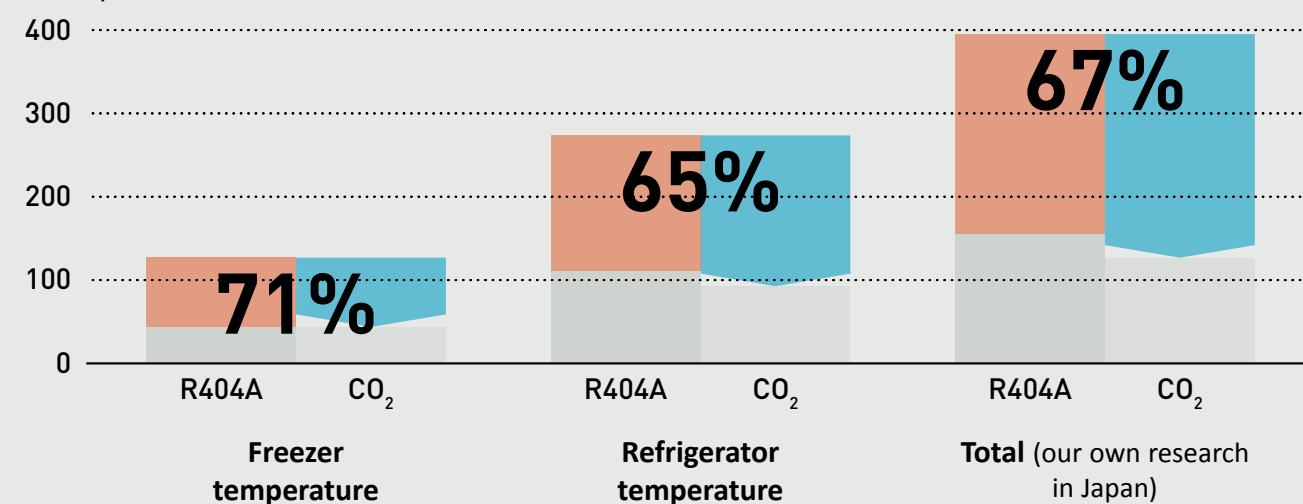

Direct influence ¹⁾

Indirect influence ²⁾

1) Direct influence presents the effect of refrigerant leakage comparing R744 (CO₂) with R404A.

2) Indirect influence presents CO₂ emissions linked to power consumption of CO₂ unit and conventional units.

By Panasonic research in Japan. Comparing 6 shops average for R404A Inverter multi condensing unit.

Energy saving
25,4% freezer
16,2% refrigeration

CO₂ emission
67% reduction

Natural solutions with high energy savings

Panasonic's range of CO₂ condensing units - CR Series with natural refrigerant, offer a reliable solution for a wide range of applications, including convenience stores, supermarket, petrol stations and cool rooms.



Supermarkets and food retail



Convenience stores



Liquor stores



Petrol station



Cool room and preparation rooms



Distribution centres



Restaurant cold rooms



Industrial storage (refrigerated warehouses and producing areas)



Food processing plants



Healthcare




Aged Care




Agriculture / Floral / Greenhouses

Showcases

Convenience stores, supermarkets, gas-stations.

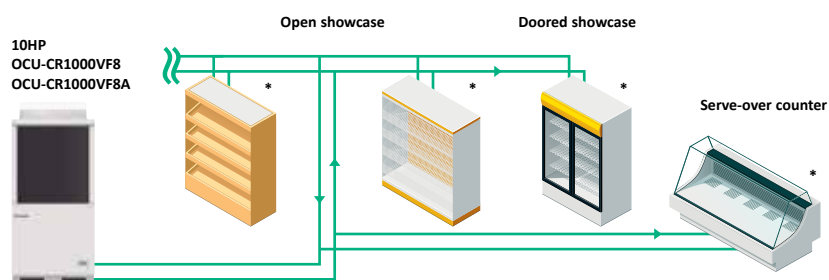



* Controllers: PAW-CO2-PANEL-C or local supply.

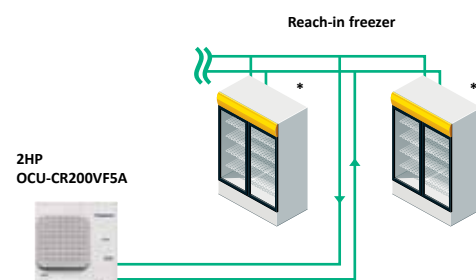

Cool room application to keep food fresh

Multiple installation capabilities. Unparalleled flexibility:

- Food retail applications (convenience store, supermarkets, gas-stations)
- Food service applications (restaurants, canteens, schools)
- Non-food applications (warehousing, industrial storage, healthcare)

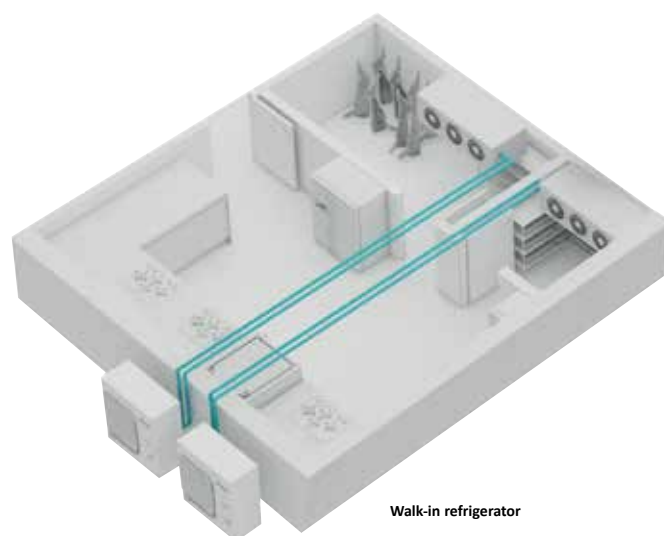

Sustainable refrigeration systems for your food retail


CO₂ refrigerant is the choice to curb carbon footprint of any business organization, especially to food retailers, to whom it brings key advantages.




1
10 HP MT TYPE
(OCU-CR1000VF8).




2
2 HP MT/LT TYPE
(OCU-CR200VF5A).



3
Reach-in freezer (field supplied).

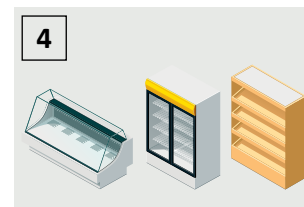

4
Serve-over counters, showcase and
walk-in refrigerator (field supplied).

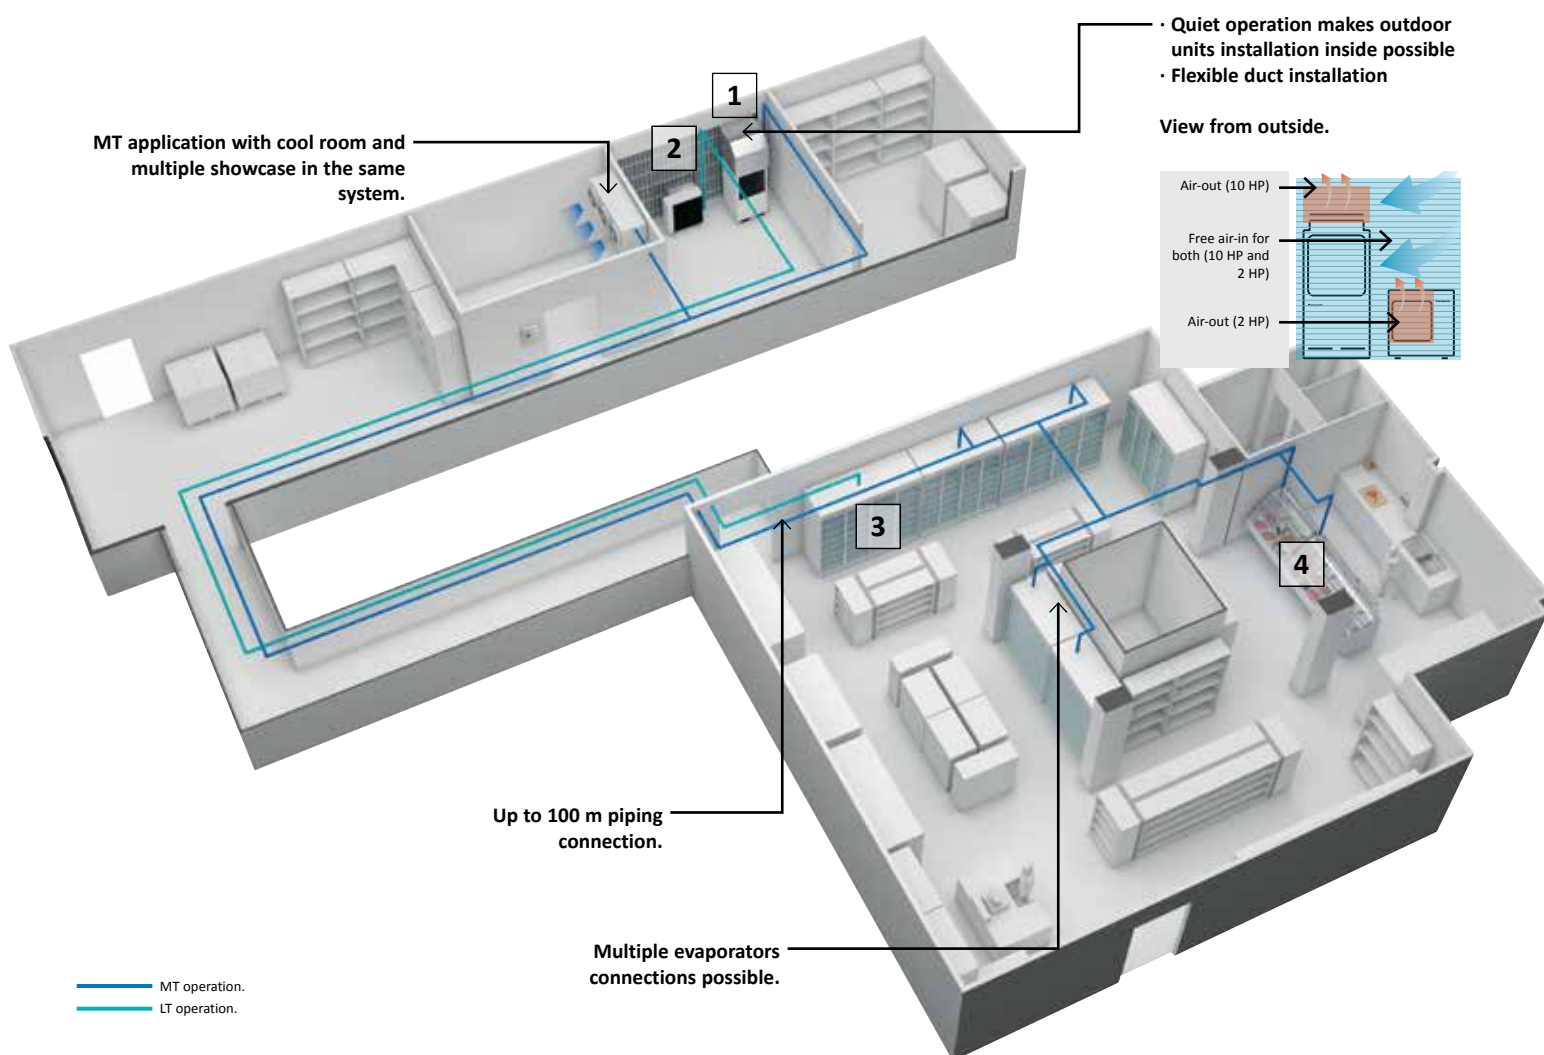

Nolan's Supermarket.

Nolan's Supermarket celebrated its 60th year in business with an extension and full refurbishment which completely overhauled the existing store.

A particular focus of the project was to create a state-of-the-art refrigeration system operating on the 'Zero Ozone Depletion' plus ultralow GWP of 1 natural refrigerant CO₂ and as part of the scheme. Panasonic CO₂ condensing units - CR Series have been chosen because of the high performance and reliable quality.

The safe refrigeration systems for your healthcare business


CO₂ is the right refrigerant to curb carbon footprint of any business organization. In addition, there are advantages specially for healthcare business. This project example shows one of the warehouse in the healthcare laboratory which requires several cool rooms there to keep bio-products safely.



1
10 HP LT TYPE
(OCU-CR1000VF8A).



2
10 HP MT TYPE
(OCU-CR1000VF8).

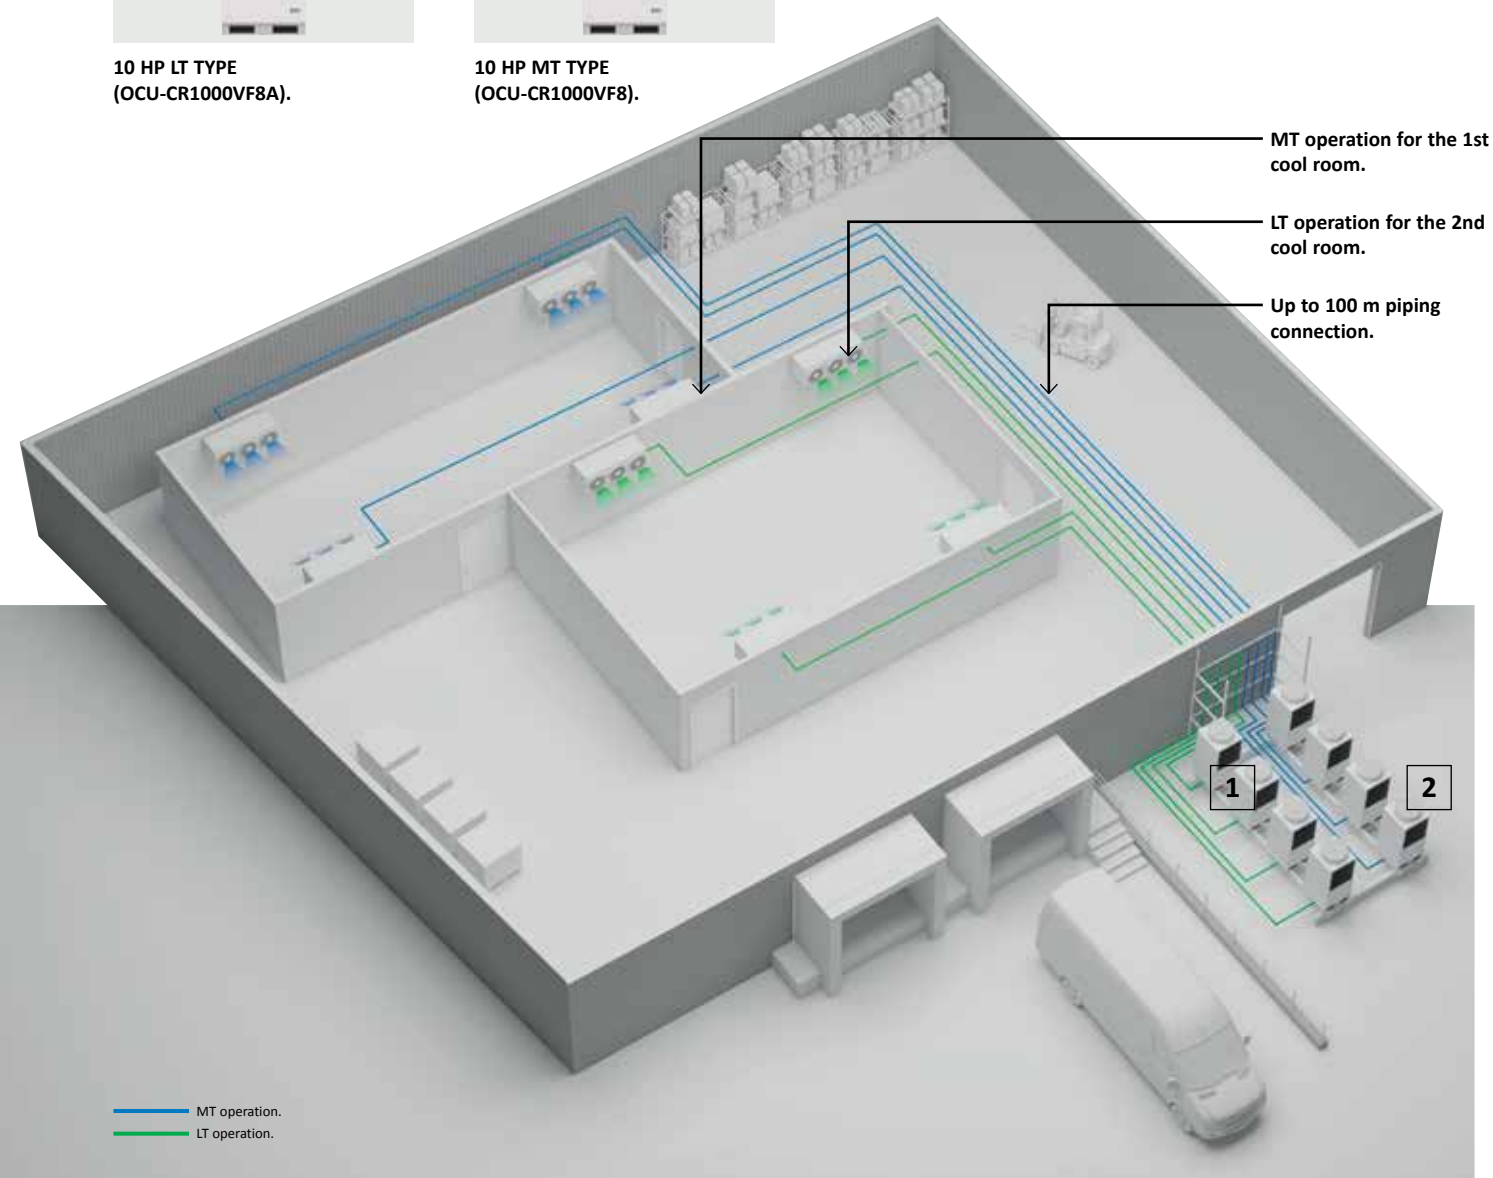

STEMCELL Technologies.

STEMCELL Technologies is a global biotechnology company that develops, manufactures and sells products and provides services that support academic and industrial scientists.

Panasonic CO₂ condensing units - CR Series have been chosen to fulfill the expectation of environmental-friendly and safety requirements. The products with reliable quality and high performance was also an essential point.

The Panasonic CR Series offer a wide range of refrigeration systems, meeting the specific needs of small retail stores.



New CR Series 20 HP MT/LT model.


The CR Series now includes 20 HP MT/LT model, a highly efficient multi compressor solution.

- Multi-compressor systems
- Smaller footprint
- Maximum piping length of 100 m
- Cooling capacity can be controlled from 25% to 100% under partial load
- Flexible and precise control capabilities with digital input/output

Energy efficient multi compressors operation.

By distributing the workload between two compressors, the system operate efficiently, adjusting capacity to match the varying cooling demands. Compressors 1 and 2 alternate every 10 days to ensure even load distribution.

Example of compressor operation.

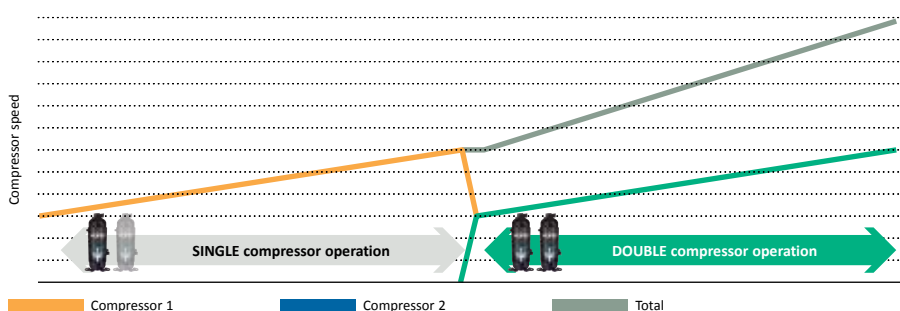

Superior cooling capacity at each evaporating temperature.

CO₂ transcritical condensing units - CR Series have a high cooling capacity at each set point. The CO₂ 2-stage compressor developed by Panasonic is designed to compress CO₂ refrigerant twice; it reduces the load in operation by half (compared to 1-stage refrigerant compression) and delivers increased durability and reliability.

Units can be programmed to run at low and medium temperatures at initial set-up.


These settings can then be modified by turning a simple and user friendly rotary switch to further enhance energy savings.

MT/LT Type: 200VF5A - 4 / 2 kW.

3.83 SEPR cooling.
1.92 SEPR freezing.

* SEPR values has been tested at 3-part laboratory.

OCU-CR200VF5A(SL)¹⁾.
Cooling capacity (kW)

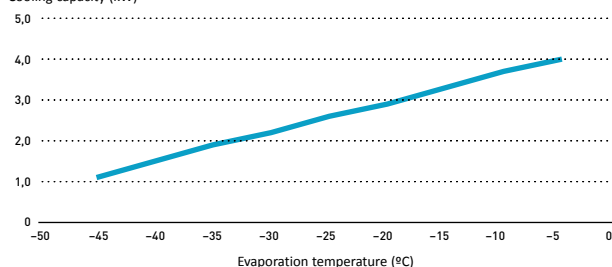


MT Type: 400VF8 - 7,5 kW. MT/LT Type: 400VF8A - 8 / 4 kW.

2.45 SEPR cooling.
1.56 SEPR freezing.

* Model 400VF8A.

OCU-CR400VF8(SL) / OCU-CR400VF8A(SL)²⁾.
Cooling capacity (kW)

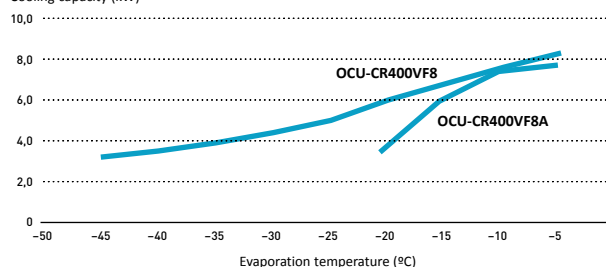


MT Type: 1000VF8 - 15 kW. MT/LT Type: 1000VF8A - 16 / 8 kW.

2.86 SEPR cooling.
1.49 SEPR freezing.

* Model 1000VF8A.


OCU-CR1000VF8(SL) / OCU-CR1000VF8A(SL)²⁾.
Cooling capacity (kW)

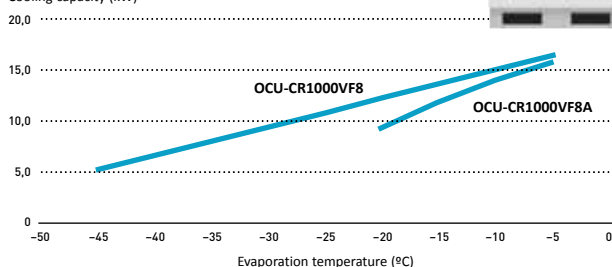

NEW MT/LT Type: 2000VF8A - 29 / 15 kW.

3.10 SEPR cooling.
1.64 SEPR freezing.

OCU-CR2000VF8A(SL)¹⁾.
Cooling capacity (kW)

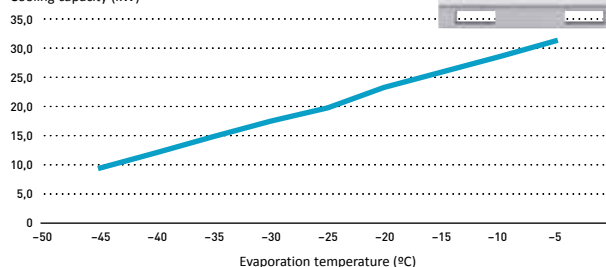

1) Ambient temperature: 32 °C, 230 V, refrigerant: R744, suction gas temperature: 18 °C. 2) Ambient temperature: 32 °C, 400 V, refrigerant: R744, suction gas temperature: 18 °C.

1 Superior efficiency with reliable quality

- Panasonic has combined the 2-stage compressor with the split cycle for increased efficiency
- High seasonal performance. SEPR: Maximum 3.83 in cooling, 1.92 in freezing¹⁾
- High COP at high ambient temperature

1) 200VF5A.

2 Heat recovery port¹⁾ as renewable energy

- Maximum 16,7 kW²⁾ of heating for free
- Optional possibility to get subsidy (depending on location)
- Easy connection process

1) For models 1000VF8A and 2000VF8A. 2) For model 1000VF8A.

3 Flexible installation

- Set-points at medium or low temperature available depending on applications
- Compact unit
- Silent operation
- Long piping length: Maximum 100 m²⁾
- High external static pressure
- Transfer pressure control for stable electric expansion valve control in showcases²⁾

2) For models 1000VF8A and 2000VF8A.

Technology by Panasonic

Excellent quality control established by skilled factory team.

Reliability is our main target and therefore offer warranties for 1 year for parts.



Reliable CO₂ technology by Panasonic

- Reliable quality: Made in Japan
- 19,500 units sold and installed in more than 25,000 retail operations such as convenience stores and supermarkets in Japan*
- Excellent quality control established by skilled factory team

* As of the end of December 23.


Panasonic's combined technology of the 2-stage compressor with the split cycle

- Panasonic 2-stage rotary compressor delivering powerful performance for more than 20 years
- Split cycle* enhances cooling effect


* Available for 200VF5A, 400VF8A, 1000VF8A and 2000VF8A models.

** In the case that the standard cycle with 1-stage rotary compressor was compared.


Watch the highlighted technology video.

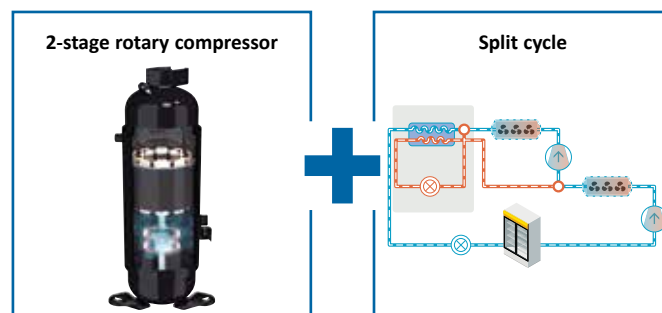

Standard cycle.

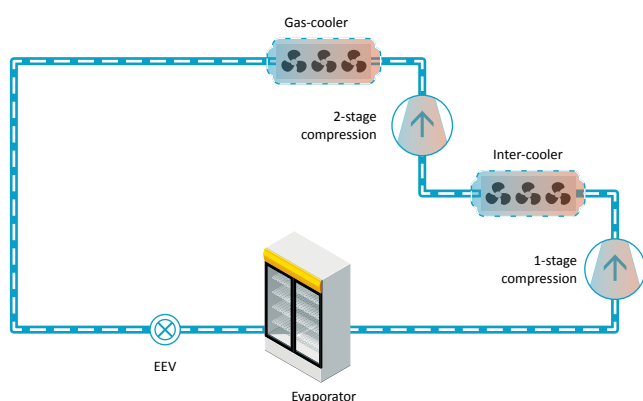

Split cycle.

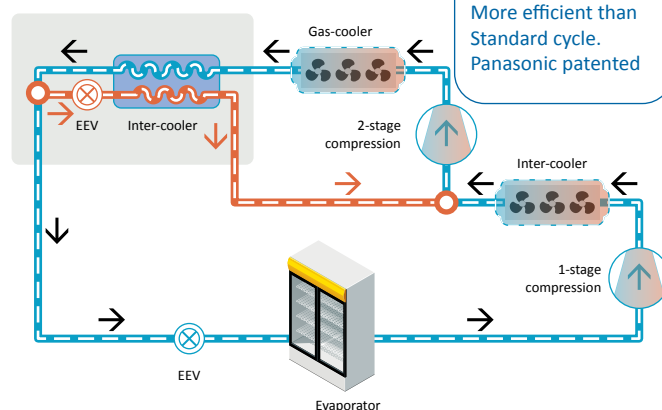

Heat recovery function for heating


This function offers refrigeration combined with heating all in one system. The ground-breaking solution allows for increased opportunity to cut running costs by utilising exhausted heat from refrigeration and transferring to the energy source for heating.

16.7 kW¹⁾
Of hot water for free

What is heat recovery function?

Solution example.

Heat recovery system can produce both heating and refrigeration.

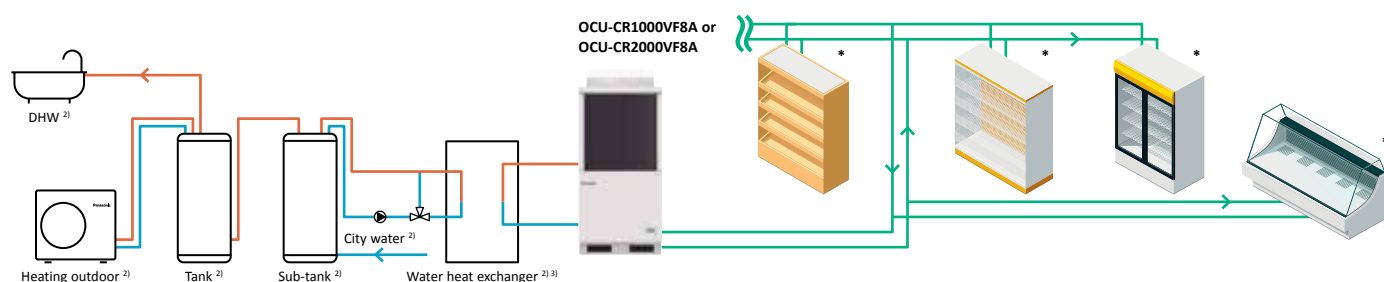

1) Example for 10 HP MT/LT. Tested with OCU-CR1000VF8A. Under the condition: ambient temperature 32 °C, evaporation temperature -10 °C. 100% Partial load.

2) Local supply.

3) Heat Recovery requires an external heat exchanger to be selected and delivered by the installer to the end user.

* Controllers: PAW-CO2-PANEL-C or local supply.

Control and connectivity

Panasonic CO₂ condensing units - CR Series is optimized with Panel-C intelligent controller and a service checker for professionals. It can be easily integrated with major monitoring systems.



Recommended Expansion Valves

| Manufacture of showcase control's | Saginomiya | Carel | Danfoss | Eliwell | Dixell/Emerson |
|---|---|------------------------------------|---|----------------------|----------------|
| Valve available for R744 | Yes | Yes | Yes | No | No |
| Design pressure of valve | 120bar | Up to 140bar | 90bar | - | - |
| Controls available | Yes by others, no showcase controls | Yes | Yes | Yes | Yes |
| Supervision speak with Panasonic condensing unit | Have no supervision system available in Australia | Yes | Yes | No, can be developed | Yes |
| Superheat control for driving valves. | Yes | Yes | Yes | Yes | Yes |
| Superheat control for driving competitor valves | No | Yes, most available valves | Yes, can drive Saginomiya valve | No information | Yes |
| Complete system available for all 4/10/20HP MT OCUs | No, showcase control missing | Yes, E2V-Z*, E2V-CW, E2V-CS series | Yes, AKVP* series with minimum 4 evaporators per OCU | No | Yes |
| Complete system available for 2HP/4HP/10HP/20HP LT OCUs | No, showcase control missing | Yes, E2V-CW, E2V-CS series | No, valve missing for 120 bar design pressure and / or high MOPD applications | No | Yes |

*Applicable if the evaporator and liquid line pressure difference does not exceed the valve's MOPD of 35 bar.

Modbus compatibility with monitoring system

Panasonic CO₂ condensing units - CR Series can be supervised by major monitoring system such as CAREL, Eliwell, COPELAND, Danfoss, RDM and Pego. Monitoring system ensures the recording, monitoring and reporting of temperature conditions etc... of entire CO₂ condensing units - CR Series system at shops.

Monitoring system



Standard boss & boss-mini

AK-SM Series*

TelevisGo

DMTOUCH

TeleNET

Site Supervisor

* M2M1-10 gateway (Model code: FDS021) is required in addition to the monitoring system. M2M1-10 gateway is a local supply.

CR Series guide

| Outdoor units | MT | 4.0 kW | 7.0 kW | 8.0 kW | 15.0 kW | 16.0 kW | 29.0 kW |
|---------------|----|--------|--------|--------|---------|---------|---------|
| | LT | 2.0 kW | | 4.0 kW | | 8.0 kW | 15.0 kW |

**2 HP MT / LT
(200VF5A)**



OCU-CR200VF5A
OCU-CR200VF5ASL

**4 HP MT
(400VF8)**



OCU-CR400VF8
OCU-CR400VF8SL

**4 HP MT / LT
(400VF8A)**



OCU-CR400VF8A
OCU-CR400VF8ASL

**10 HP MT
(1000VF8)**



OCU-CR1000VF8
OCU-CR1000VF8SL

**10 HP MT / LT
(1000VF8A)**



OCU-CR1000VF8A
OCU-CR1000VF8ASL

**NEW 20 HP MT /
LT (2000VF8A)**





OCU-CR2000VF8A
OCU-CR2000VF8ASL

Scan to access
selection guide





Condensing units index



| Standard outdoor unit | | | OCU-CR200VF5A | OCU-CR400VF8 | OCU-CR400VF8A |
|--|-------------------------|------------------|-----------------------|--------------------|-----------------------|
| Anti corrosion coating outdoor unit | | | OCU-CR200VF5ASL | OCU-CR400VF8SL | OCU-CR400VF8ASL |
| Type (MT: medium temperature, LT: low temperature) | | | MT (4 kW) / LT (2 kW) | MT (7,5 kW) | MT (8 kW) / LT (4 kW) |
| Power supply | Voltage | V | 220 / 230 / 240 | 380 / 400 / 415 | 380 / 400 / 415 |
| | Phase | | Single phase | Three phase | Three phase |
| | Frequency | Hz | 50 | 50 | 50 |
| Cooling capacity at ET -10 °C AT 32 °C | | kW | 3.70 | 6.90 | 7.64 |
| Cooling capacity at ET -35 °C AT 32 °C | | kW | 1.92 | — | 3.80 |
| SEPR cooling at ET -10 °C AT 32 °C | | | 3.83 | 3.17 | 3.20 |
| SEPR freezing at ET -35 °C AT 32 °C | | | 1.92 | — | 1.73 |
| Annual electricity consumption at ET -10 °C AT 32 °C | | kWh/a | 6 797 | 13 384 | 14 488 |
| Annual electricity consumption at ET -35 °C AT 32 °C | | kWh/a | 8 021 | — | 16 255 |
| Evaporator connection | | | Multiple | Multiple | Multiple |
| Evaporation temperature | Min ~ Max | °C | -45 ~ -5 | -20 ~ -5 | -45 ~ -5 |
| Ambient temperature | Min ~ Max | °C | -20 ~ +43 | -20 ~ +45 | -20 ~ +45 |
| Without Adiabatic Solution | | | | | |
| Cooling Capacity at -5°C AT 43°C (kW) – MT | | | 3.46 | 5.83 | 4.11 |
| Cooling Capacity at -29.5°C AT 43°C (kW) – LT | | | 1.98 | N/A | 3.63 |
| Without Adiabatic Solution | | | | | |
| Cooling Capacity at -5°C AT 32°C (kW) – MT | | | 4.04 | 7.42 | 7.27 |
| Cooling Capacity at -29.5°C AT 32°C (kW) – LT | | | 2.32 | N/A | 4.45 |
| Refrigerant | | | R744 | R744 | R744 |
| Design pressure liquid line | MPA | | 12 | 8 | 8 |
| Design pressure suction line | MPA | | 8 | 8 | 8 |
| User system external alarm. Digital input. Non-voltage contact | | | Yes | Yes | Yes |
| Liquid tube electromagnetic valve | Vac | | 220 / 230 / 240 | 220 / 230 / 240 | 220 / 230 / 240 |
| Showcase operation ON / OFF signal. Digital input. Non-voltage contact | | | Yes | Yes | Yes |
| Modbus communication line (RS485) | Ports | | Yes | Yes | Yes |
| Compressor type | | | 2- stage rotary | 2- stage rotary | 2- stage rotary |
| Dimension | H x W x D | mm | 930 x 900 x 437 | 948 x 1 143 x 609 | 948 x 1 143 x 609 |
| Net weight | | Kg | 70 | 136 | 149 |
| Piping diameter ¹⁾ | Suction pipe | Inch (mm) | ¾ (9.52) | ½ (12.70) | ½ (12.70) |
| | Liquid pipe | Inch (mm) | ¼ (6.35) | ¾ (9.52) | ¾ (9.52) |
| Length of connection piping | | m | 25 | 50 ²⁾ | 50 ²⁾ |
| PED | CAT | | I | II | II |
| Air flow | | m³/min | 54 | 59 | 59 |
| External static pressure | | Pa | 17 | 50 | 50 |
| Heat recovery port | | | — | — | Yes |
| Standard performance | Ambient temperature | °C | 32 | 32 | 32 |
| | Evaporating temperature | °C | -10 | -35 | -10 |
| | Cooling capacity | kW | 3.70 | 1.92 | 6.90 |
| | Power consumption | kW | 1.79 | 1.65 | 4.00 |
| | Nominal load ampere | A | 7.94 | 7.26 | 6.14 |
| | Sound pressure | dB(A) | 35.5 ⁴⁾ | 35.5 ⁴⁾ | 33.0 ⁵⁾ |
| Necessary accessories | | | | | |
| Drier filter liquid line, Ø6,35 mm | | D-152T / DCY-P12 | Yes (included) | Yes (included) | Yes (included) |
| Drier filter liquid line, Ø15,88 mm | | D-155T / DCY-P8 | — | — | — |
| Suction filter, Ø19,05 mm (outer Ø welding) | | S-008T / S-008T1 | — | Yes (included) | Yes (included) |
| Charging pipe | | SPK-TU125 | Yes (included) | Yes (included) | Yes (included) |

1) These diameters correspond to the output of the unit. The required diameter must be calculated with Refrigeration designer available on PRO Club. 2) PZ-68S (refrigeration oil) must be added according to Refrigeration designer available on PRO Club. 3) PZ-68S (refrigeration oil) must be added if >50 m. 4) ET-10 °C, 65 S-1, 10 m from product. 5) ET-10 °C, 80 S-1, 10 m from product. 6) ET -10 °C, 60 S-1, 10 m from product.





| | | | | | |
|--|-------------------------|------------------|--------------------|------------------------|-------------------------|
| Standard outdoor unit | | | OCU-CR1000VF8 | OCU-CR1000VF8A | OCU-CR2000VF8A* |
| Anti corrosion coating outdoor unit | | | OCU-CR1000VF8SL | OCU-CR1000VF8ASL | OCU-CR2000VF8ASL* |
| Type (MT: medium temperature, LT: low temperature) | | | MT (15 kW) | MT (16 kW) / LT (8 kW) | MT (29 kW) / LT (15 kW) |
| Power supply | Voltage | V | 380 / 400 / 415 | 380 / 400 / 415 | 380 / 400 / 415 |
| | Phase | | Three phase | Three phase | Three phase |
| | Frequency | Hz | 50 | 50 | 50 |
| Cooling capacity at ET -10 °C AT 32 °C | | kW | 13.92 | 14.98 | 28.76 |
| Cooling capacity at ET -35 °C AT 32 °C | | kW | — | 7.61 | 14.61 |
| SEPR cooling at ET -10 °C AT 32 °C | | | 2.62 | 2.86 | 3.10 |
| SEPR freezing at ET -35 °C AT 32 °C | | | — | 1.49 | 1.64 |
| Annual electricity consumption at ET -10 °C AT 32 °C | | kWh/a | 32 815 | 32 409 | 57 076 |
| Annual electricity consumption at ET -35 °C AT 32 °C | | kWh/a | — | 39 985 | 66 760 |
| Evaporator connection | | | Multiple | Multiple | Multiple |
| Evaporation temperature | Min ~ Max | °C | -20 ~ -5 | -45 ~ -5 | -45 ~ -5 |
| Ambient temperature | Min ~ Max | °C | -20 ~ +43 | -20 ~ +43 | -20 ~ +45 |
| Without Adiabatic Solution | | | | | |
| Cooling Capacity at -5°C AT 43°C (kW) – MT | | | 9.41 | 13.73 | 27.89 |
| Cooling Capacity at -29.5°C AT 43°C (kW) – LT | | | N/A | 7.72 | 15.69 |
| Without Adiabatic Solution | | | | | |
| Cooling Capacity at -5°C AT 32°C (kW) – MT | | | 15.33 | 16.34 | 31.37 |
| Cooling Capacity at -29.5°C AT 32°C (kW) – LT | | | N/A | 9.19 | 17.65 |
| Refrigerant | | | R744 | R744 | R744 |
| Design pressure liquid line | MPA | | 8 | 8 | 8 |
| Design pressure suction line | MPA | | 8 | 8 | 8 |
| User system external alarm. Digital input. Non-voltage contact | | | Yes | Yes | Yes |
| Liquid tube electromagnetic valve | | Vac | 220 / 230 / 240 | 220 / 230 / 240 | — |
| Showcase operation ON / OFF signal. Digital input. Non-voltage contact | | | Yes | Yes | Yes |
| Modbus communication line (RS485) | | Ports | Yes | Yes | Yes |
| Compressor type | | | 2- stage rotary | 2- stage rotary | 2- stage rotary |
| Dimension | H x W x D | mm | 1 941 x 890 x 890 | 1 941 x 890 x 890 | 1 941 x 1 190 x 890 |
| Net weight | | Kg | 293 | 320 | 494 |
| Piping diameter ¹⁾ | Suction pipe | Inch (mm) | ¾ (19.05) | ¾ (19.05) | 1 (25.40) |
| | Liquid pipe | Inch (mm) | ¾ (15.88) | ¾ (15.88) | ¾ (19.05) |
| Length of connection piping | | m | 100 ³⁾ | 100 ³⁾ | 100 ³⁾ |
| PED | CAT | | II | II | II |
| Air flow | | m³/min | 220 | 220 | 220 |
| External static pressure | | Pa | 58 | 58 | 58 |
| Heat recovery port | | | — | Yes | Yes |
| Standard performance | Ambient temperature | °C | 32 | 32 | 32 |
| | Evaporating temperature | °C | -10 | -10 | -35 |
| | Cooling capacity | kW | 14.00 | 15.10 | 28.74 |
| | Power consumption | kW | 8.20 | 8.20 | 15.67 |
| | Nominal load ampere | A | 12.60 | 12.60 | 24.31 |
| | Sound pressure | dB(A) | 36.0 ⁶⁾ | 36.0 ⁶⁾ | 38.9 ⁶⁾ |
| Necessary accessories | | | | | |
| Drier filter liquid line, Ø6,35 mm | | D-152T / DCY-P12 | — | — | — |
| Drier filter liquid line, Ø15,88 mm | | D-155T / DCY-P8 | Yes (included) | Yes (included) | Yes (included) |
| Suction filter, Ø19,05 mm (outer Ø welding) | | S-008T / S-008T1 | Yes (included) | Yes (included) | Yes (included) |
| Charging pipe | | SPK-TU125 | Yes (included) | Yes (included) | Yes (included) |

1) These diameters correspond to the output of the unit. The required diameter must be calculated with Refrigeration designer available on PRO Club. 2) PZ-68S (refrigeration oil) must be added according to Refrigeration designer available on PRO Club. 3) PZ-68S (refrigeration oil) must be added if >50 m. 4) ET-10 °C, 65 S-1, 10 m from product. 5) ET-10 °C, 80 S-1, 10 m from product. 6) ET -10 °C, 60 S-1, 10 m from product. * Available in Summer 2024. Tentative data.



AUSTRALIA

Head Office: **Sydney**

66 Glendenning Road,
Glendenning, NSW 2761
Australia

hussmann.com.au

NEW ZEALAND

Head Office: **Auckland**

2-6 Niall Burgess Road,
Mt Wellington, Auckland 1060
New Zealand

mcalpinehussmann.co.nz

CHINA

Head Office & Manufacturing: **Suzhou**

Building No.7, 58 Li Jiang Road,
Suzhou Science & Technology Town,
Suzhou New District, Suzhou,
P.R.China. 215153

hussmann.com.au



HUSSmann®