

# Panasonic

## Commercial Food Services

PRODUCT CATALOGUE

2025



# Quality that lasts

In all Sectors

With Panasonic, you optimise your Total Cost in Ownership (TCO) and Total Value of Ownership (TVO) for the whole life of your appliance - and that's not a short time!



## Save on costs

- » High energy efficiency
- » Low total operating costs
- » Long service life suitable for commercial operation



## Save on time

- » Low effort with easy-to-clean design and materials
- » Maximum ergonomic efficiency for effortless work processes
- » Low maintenance



## Ensure save storage of goods


- » Guaranteed temperature stability even at peak times
- » Designed for commercial application



## A focus on sustainability

- » Appliances with very low energy consumption
- » Natural refrigerant on chillers and freezers
- » Resource-saving manufacturing processes

# Contents

|                                                                                     |                                                                    |           |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|-----------|
|    | <b>Vertical Doored Chillers</b><br>Husmann by Austral              | <b>7</b>  |
|   | <b>Grab-N-Go Self-Contained</b><br>MultiDeck and Semi-Vertical     | <b>11</b> |
|  | <b>Commercial Refrigerators</b><br>HP Series Upright & Under Bench | <b>17</b> |
|  | <b>Commercial Freezers</b><br>HP Series Upright & Under Bench      | <b>23</b> |
|  | <b>Microwaves</b><br>Light, Medium, Heavy, Convection Oven         | <b>27</b> |
|  | <b>Rice Cookers</b><br>Lid And Hinged                              | <b>31</b> |

# The Highest Level of Precision and Reliability



At Panasonic, quality is not just a standard – it's a promise. Our products are crafted with meticulous attention to detail, ensuring superior performance, durability, and reliability in any culinary setting. From cutting-edge technologies to user-friendly designs, each product is a testament to our unwavering commitment to excellence.

Experience the difference that Panasonic products can make in your food service operations. Explore our catalogue to find a range of innovative solutions that elevate your culinary experience and set new benchmarks for quality and efficiency.

Discover excellence in every detail with the Panasonic Food Service equipment. Immerse yourself in a world where precision engineering, Japanese design, and innovation converge to deliver unparalleled quality in every product.




# Sustainability




## Husmann Sustainability Program

Husmann’s sustainability focus drives its case design to prioritise energy efficiency, reduced environmental impact, and improved product lifespan, resulting in innovative and eco-friendly solutions for its customers. The Husmann ESG framework is based on four pillars.

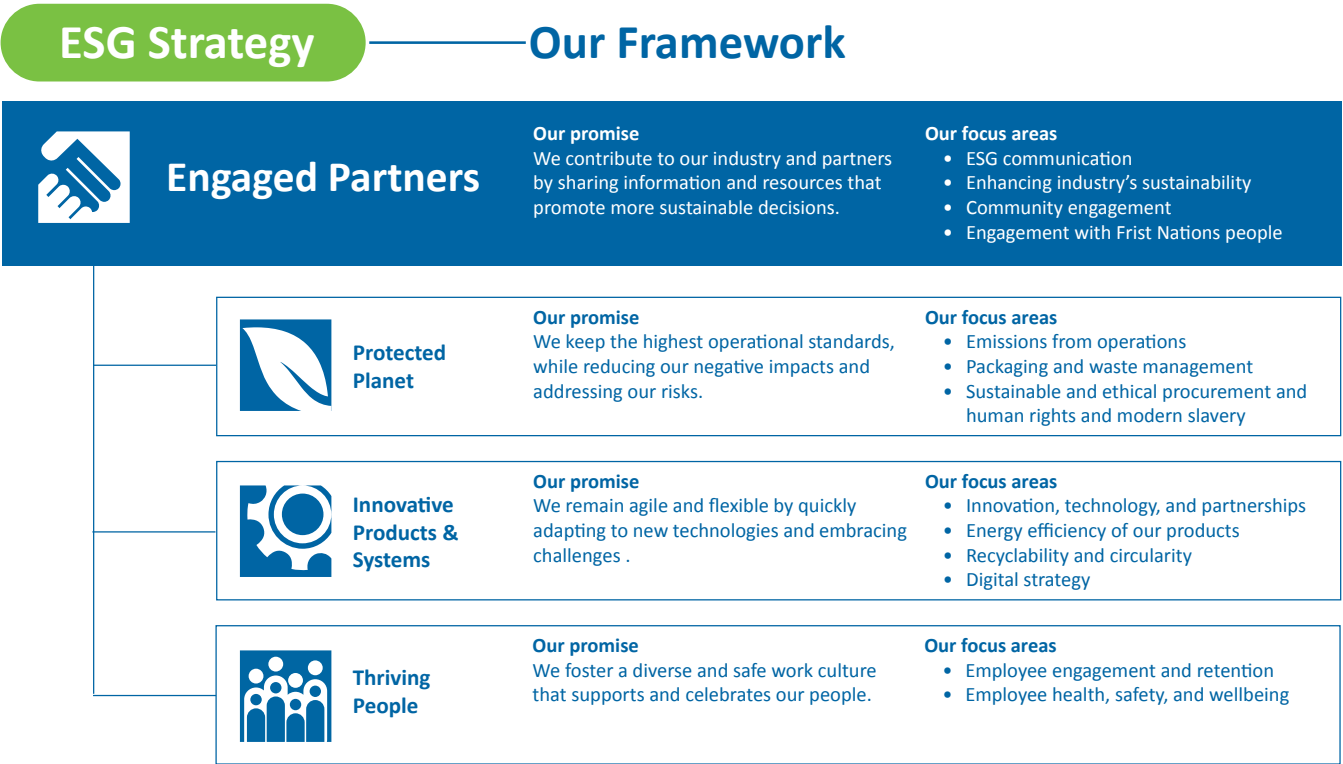



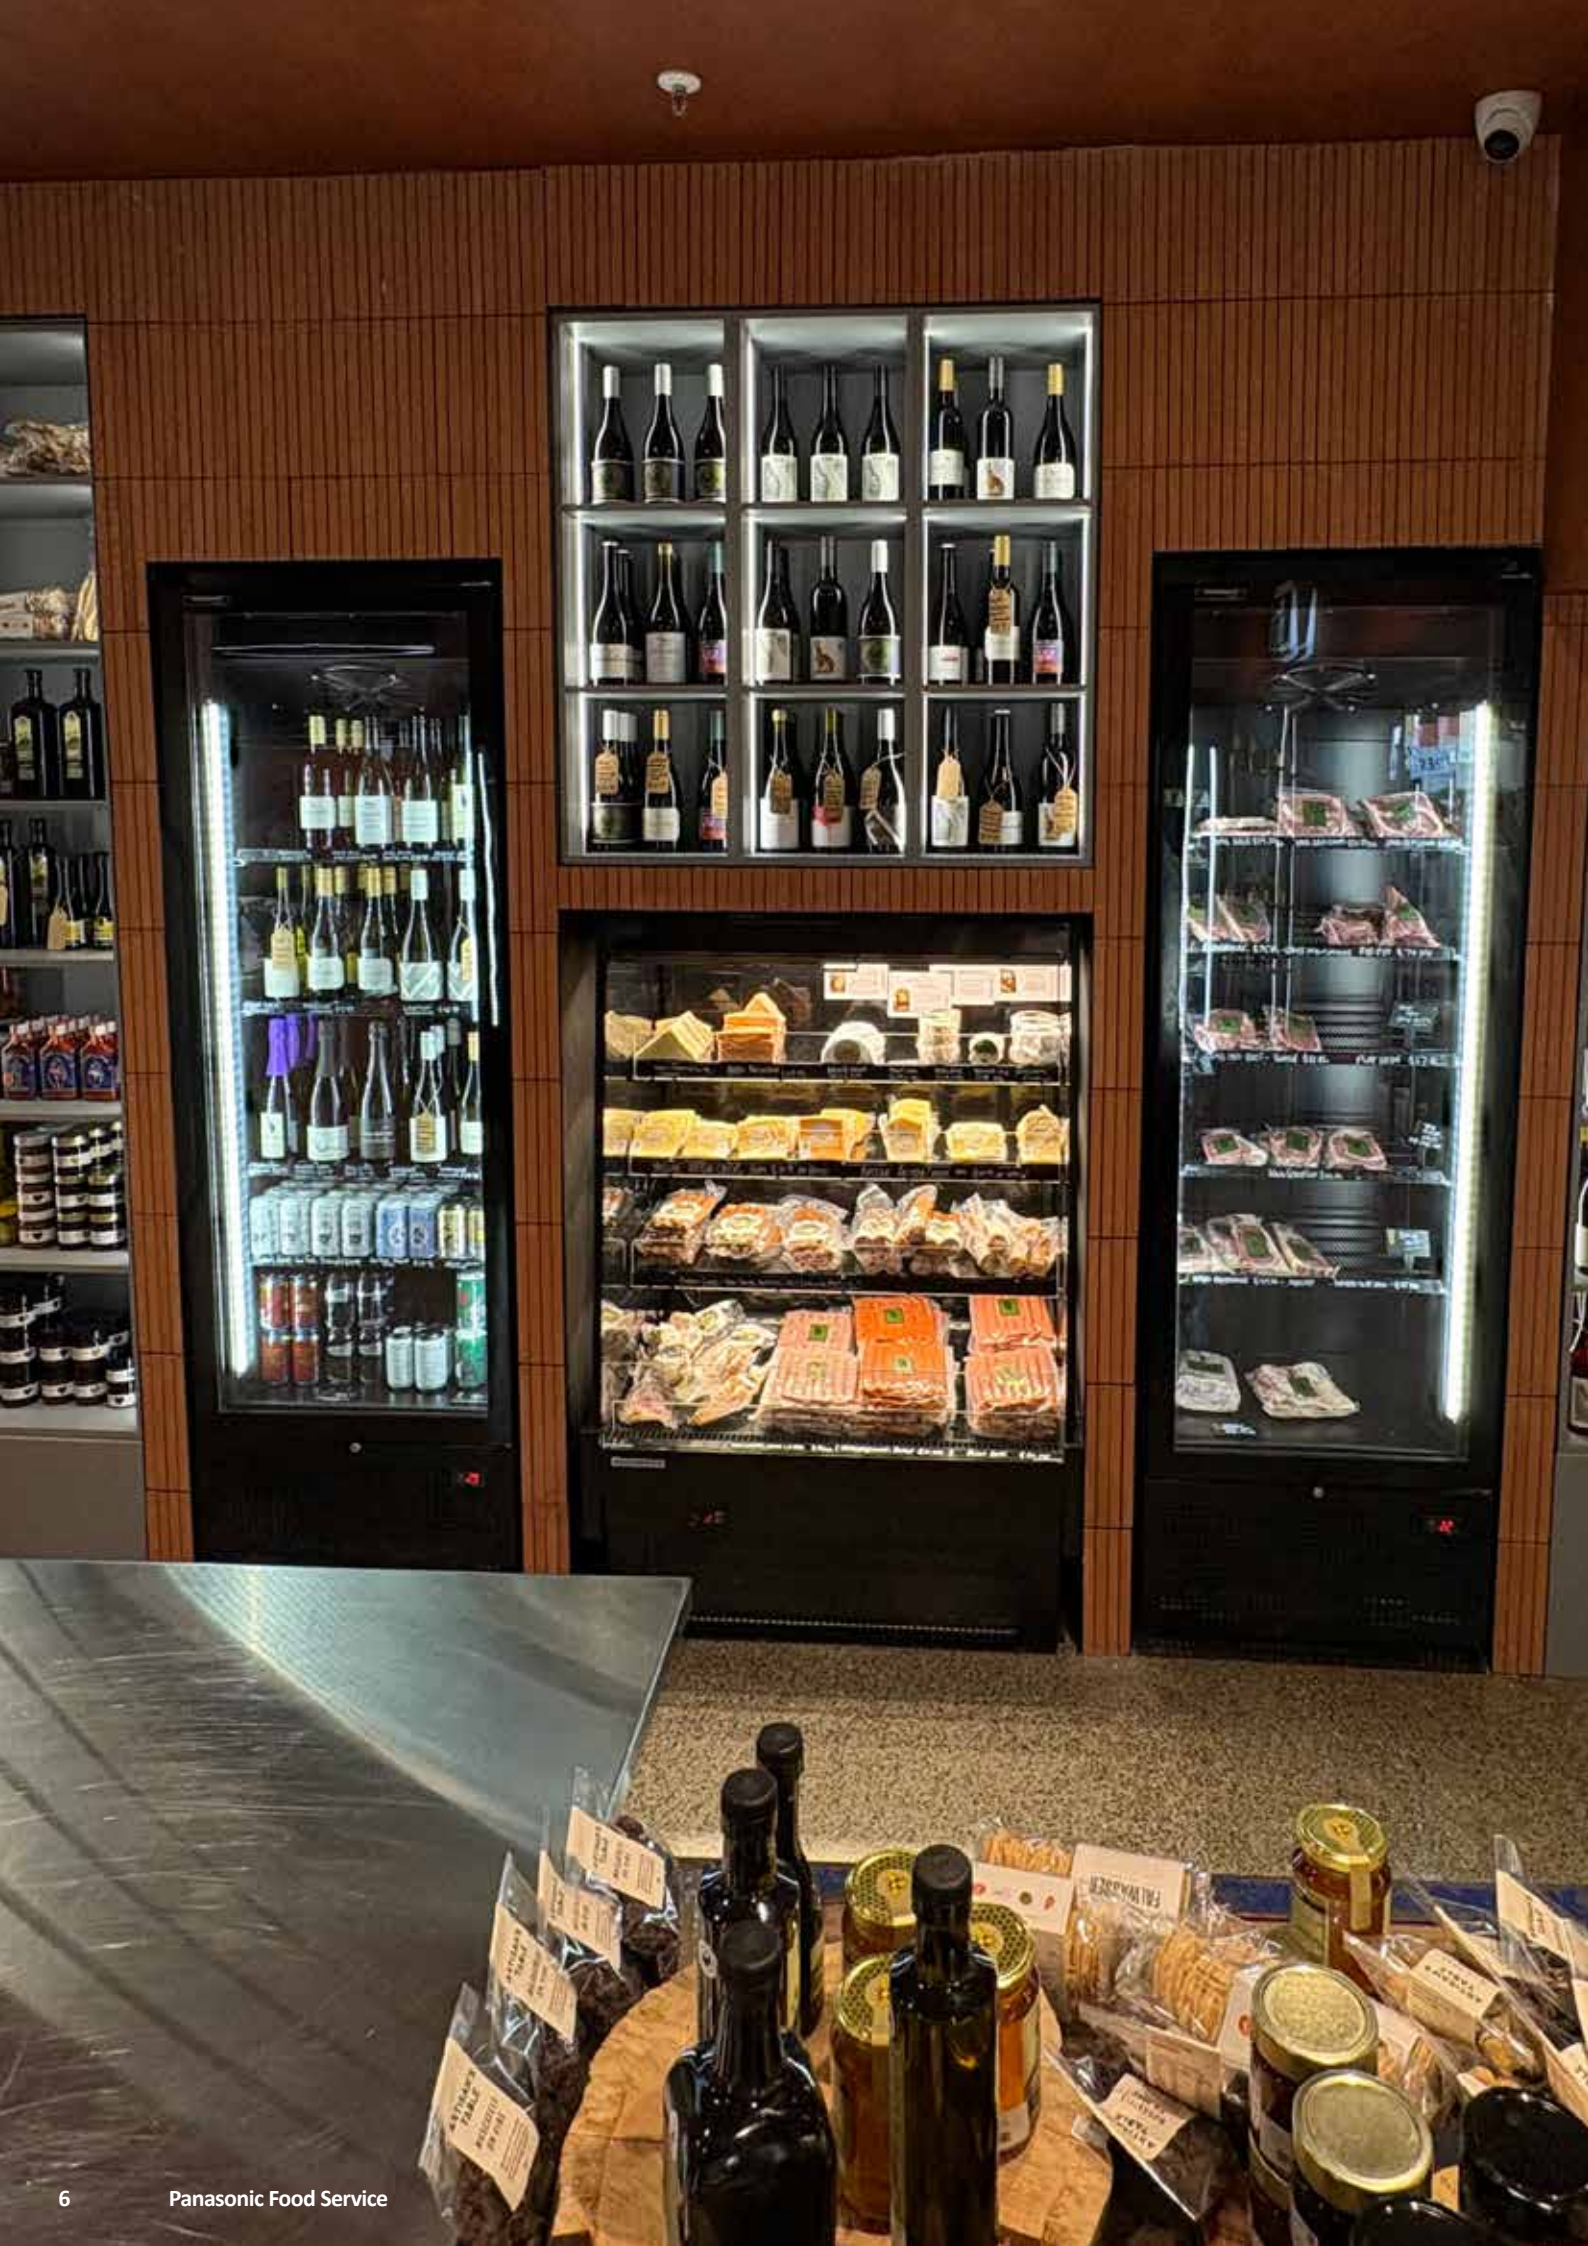


# Introducing

## Vertical Doored Chillers

**HUSSMANN**

By **austral**

Equipped with state-of-the-art natural refrigerant and inverter compressor technology and eye-level display space, this fridge offers a perfect blend of functionality and style, ensuring your products are easily accessible and irresistibly tempting.

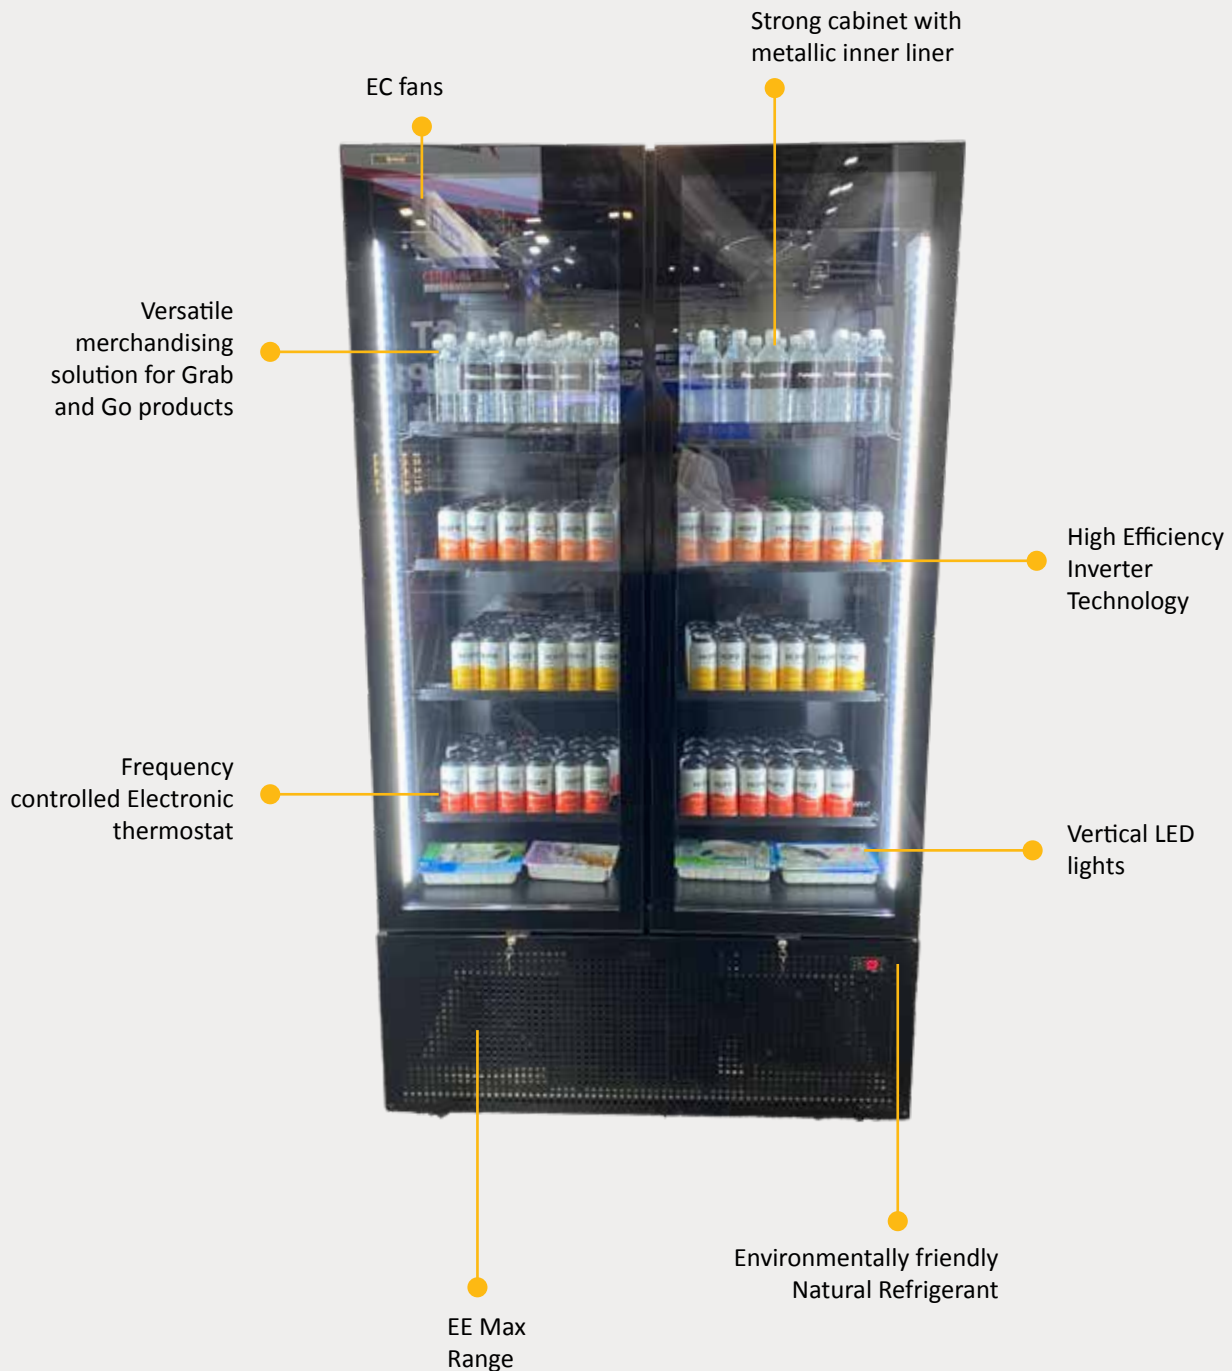







## Single Door Chiller – BV520 W VS

|                                                             |                    |
|-------------------------------------------------------------|--------------------|
| EXTERNAL DIMENSIONS [L x W x H]                             | 680x 615 x 2190mm  |
| INTERNAL DIMENSIONS [L x W x H]                             | 575 x 500 x 1675mm |
| GROSS/NET VOLUME (LT)                                       | 519 / 467          |
| 330ML CAN LOADING (MAX)                                     | 684                |
| 500ML BOTTLE LOADING (MAX)                                  | 344                |
| FACING                                                      | 8                  |
| TRANSPORT CONTAINER 40 HC<br>*with extended aluminum handle | 51                 |
| PLUG TYPE AMPERAGE                                          | 10A                |



## Single Door Chiller – BV770 W VS

|                                                             |                    |
|-------------------------------------------------------------|--------------------|
| EXTERNAL DIMENSIONS [L x W x H]                             | 800 x 700 x 2190mm |
| INTERNAL DIMENSIONS [L x W x H]                             | 720 x 570 x 1685mm |
| GROSS/NET VOLUME (LT)                                       | 728 / 678          |
| 330ML CAN LOADING (MAX)                                     | 978                |
| 500ML BOTTLE LOADING (MAX)                                  | 489                |
| FACING                                                      | 10                 |
| TRANSPORT CONTAINER 40 HC<br>*with extended aluminum handle | 42                 |
| PLUG TYPE AMPERAGE                                          | 10A                |




## Double Door Chiller – BV1300 W VS

|                                                             |                     |
|-------------------------------------------------------------|---------------------|
| EXTERNAL DIMENSIONS                                         | 1200 x 735 x 2190mm |
| INTERNAL DIMENSIONS                                         | 1125 x 622 x 1571mm |
| GROSS/NET VOLUME (LT)                                       | 1142 / 1088         |
| 330ML CAN LOADING (MAX)                                     | 1306                |
| 500ML BOTTLE LOADING (MAX)                                  | 674                 |
| FACING                                                      | 16                  |
| TRANSPORT CONTAINER 40 HC<br>*with extended aluminum handle | 24                  |
| PLUG TYPE AMPERAGE                                          | 10A                 |



## Triple Door Solution – BV1600 W VS

|                                                             |                     |
|-------------------------------------------------------------|---------------------|
| EXTERNAL DIMENSIONS                                         | 1600 x 735 x 2190mm |
| INTERNAL DIMENSIONS                                         | 1500 x 623 x 1545mm |
| GROSS/NET VOLUME (LT)                                       | 1455 / 1326         |
| 330ML CAN LOADING (MAX)                                     | 1828                |
| 500ML BOTTLE LOADING (MAX)                                  | 912                 |
| FACING                                                      | 22                  |
| TRANSPORT CONTAINER 40 HC<br>*with extended aluminum handle | 21                  |
| PLUG TYPE AMPERAGE                                          | 10A                 |



Strong Metallic  
Inner Liner



LED  
Illumination

\*Supplied black internal, black external



# Customised Corporate Decals

**Customised decals are a great way to add a personal touch to your products or merchandise.**

At Hussmann, we offer a wide range of customised decals that can be tailored to suit your specific needs and preferences. Whether you want to promote your brand, showcase your logo, or simply add some flair to your products, our customised decals are the perfect solution.

## Benefits:



### **Brand visibility:**

Allow you to prominently display your brand name and logo, increasing visibility and recognition among customers.



### **Personalised touch:**

Can be designed to reflect your unique style and personality, adding a personal touch to your products.



### **Promotional tool:**

Can be designed as a promotional tool to attract new customers and increase sales.



### **Versatile:**

Can be applied to a wide range of surfaces, including glass, metal, plastic, and more, making them a versatile option for a variety of products.



### **Durable:**

Are made from high-quality materials that are durable and long-lasting, ensuring that your branding stays looking sharp for years to come.






# Introducing

## Grab'n Go

A multi-functional grab and go solution which is not only self-contained but also energy efficient.

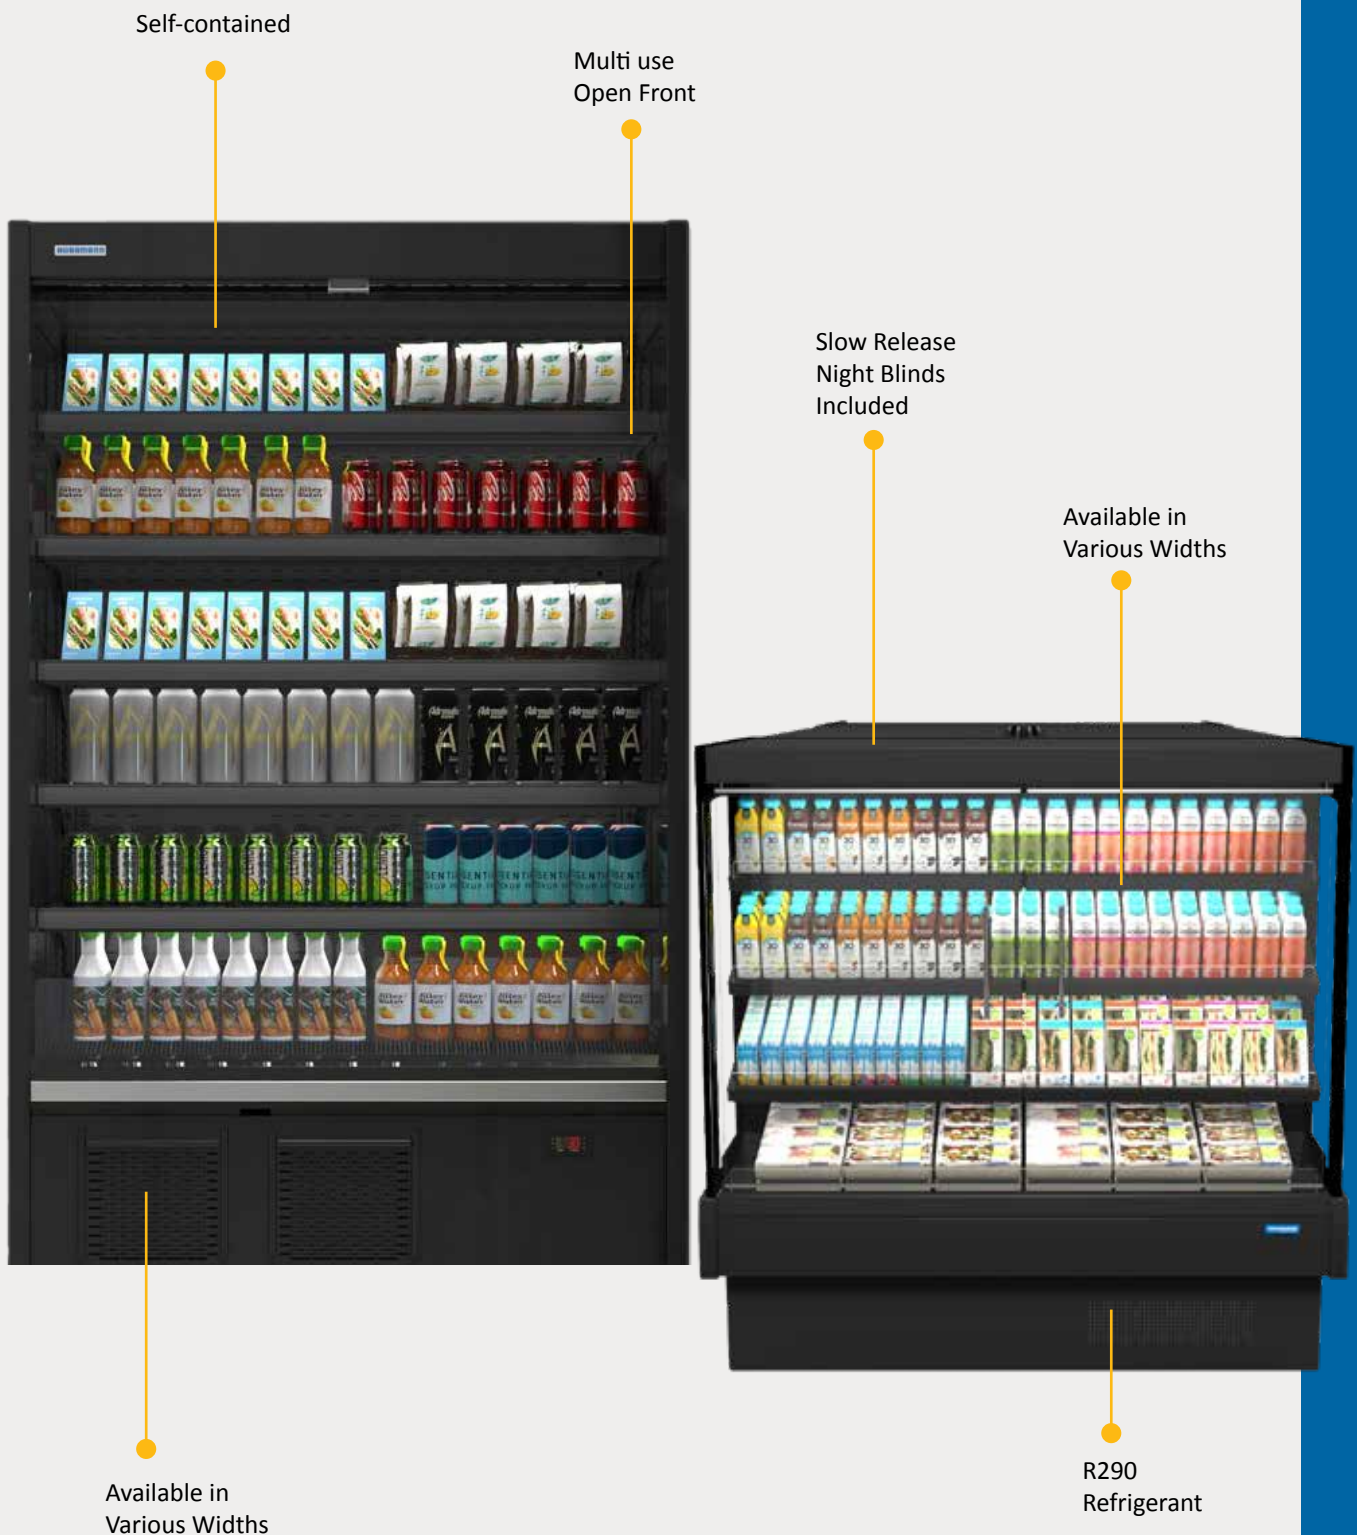

**HUSSmann®**



Panasonic Food Service



## Self-Contained Multideck Chiller Open



**H2TMS-10**  
Chiller Open



**H2TMS-14**  
Chiller Open



**H2TMS-19**  
Chiller Open



**H2TMS-26**  
Chiller Open

|                                |       |                                |       |                                |       |                                |       |
|--------------------------------|-------|--------------------------------|-------|--------------------------------|-------|--------------------------------|-------|
| HEIGHT (MM)                    | 2100  | HEIGHT (MM)                    | 2100  | HEIGHT (MM)                    | 2100  | HEIGHT (MM)                    | 2100  |
| TOTAL LENGTH (MM)              | 980   | TOTAL LENGTH (MM)              | 1330  | TOTAL LENGTH (MM)              | 1955  | TOTAL LENGTH (MM)              | 2580  |
| DEPTH (MM)                     | 860   | DEPTH (MM)                     | 860   | DEPTH (MM)                     | 860   | DEPTH (MM)                     | 860   |
| NET VOLUME (L)                 | 529   | NET VOLUME (L)                 | 735   | NET VOLUME (L)                 | 1102  | NET VOLUME (L)                 | 1469  |
| DISPLAY AREA (M <sup>2</sup> ) | 1.409 | DISPLAY AREA (M <sup>2</sup> ) | 1.958 | DISPLAY AREA (M <sup>2</sup> ) | 2.936 | DISPLAY AREA (M <sup>2</sup> ) | 3.915 |
| PLUG TYPE AMPERAGE             | 10A   | PLUG TYPE AMPERAGE             | 15A   | PLUG TYPE AMPERAGE             | 15A   | PLUG TYPE AMPERAGE             | 20A   |
| WARRANTY (YEAR)                | 2     | WARRANTY (YEAR)                | 2     | WARRANTY (YEAR)                | 2     | WARRANTY (YEAR)                | 2     |



Temp Class 3M1  
(-1°C to +5°C)



Temp Class 3M1  
(-1°C to +5°C)



Temp Class 3M1  
(-1°C to +5°C)



Temp Class 3M1  
(-1°C to +5°C)



\*Available in Black & Grey

## Self-Contained Multideck Chiller Doored



**H2TMDS-7**  
Chiller 1-Door



**H2TMDS-10 & 14**  
Chiller 2-Door



**H2TMDS-19**  
Chiller 3-Door



**H2TMDS-26**  
Chiller 4-Door

|                                |       |                                |              |                                |       |                                |       |
|--------------------------------|-------|--------------------------------|--------------|--------------------------------|-------|--------------------------------|-------|
| HEIGHT (MM)                    | 2100  | HEIGHT (MM)                    | 2100         | HEIGHT (MM)                    | 2100  | HEIGHT (MM)                    | 2100  |
| TOTAL LENGTH (MM)              | 705   | TOTAL LENGTH (MM)              | 980, 1330    | TOTAL LENGTH (MM)              | 1955  | TOTAL LENGTH (MM)              | 2580  |
| DEPTH (MM)                     | 860   | DEPTH (MM)                     | 860          | DEPTH (MM)                     | 860   | DEPTH (MM)                     | 860   |
| NET VOLUME (L)                 | 367   | NET VOLUME (L)                 | 529, 735     | NET VOLUME (L)                 | 1102  | NET VOLUME (L)                 | 1469  |
| DISPLAY AREA (M <sup>2</sup> ) | 0.811 | DISPLAY AREA (M <sup>2</sup> ) | 1.607, 1.918 | DISPLAY AREA (M <sup>2</sup> ) | 2.469 | DISPLAY AREA (M <sup>2</sup> ) | 3.317 |
| PLUG TYPE AMPERAGE             | 10A   | PLUG TYPE AMPERAGE             | 10A          | PLUG TYPE AMPERAGE             | 10A   | PLUG TYPE AMPERAGE             | 10A   |
| WARRANTY (YEAR)                | 2     | WARRANTY (YEAR)                | 2            | WARRANTY (YEAR)                | 2     | WARRANTY (YEAR)                | 2     |



Temp Class 3M1  
(-1°C to +5°C)



Temp Class 3M1  
(-1°C to +5°C)



Temp Class 3M1  
(-1°C to +5°C)



Temp Class 3M1  
(-1°C to +5°C)



Forced  
Evaporation



220-240V  
Single Phase



LED  
Lighting



2 Year Parts  
& Labour  
Warranty

## Self-Contained Multideck Glass Door Freezer



**H2TLDS-7**

Freezer 1-Door



**H2TLDS-14**

Freezer 2-Door



**H2TLDS-19**

Freezer 3-Door



**H2TLDS-26**

Freezer 4-Door

|                                |       |
|--------------------------------|-------|
| HEIGHT (MM)                    | 2100  |
| TOTAL LENGTH (MM)              | 705   |
| DEPTH (MM)                     | 860   |
| NET VOLUME (L)                 | 239   |
| DISPLAY AREA (M <sup>2</sup> ) | 0.811 |
| PLUG TYPE AMPERAGE             | 10A   |
| WARRANTY (YEAR)                | 1     |



Temp Class 3L1  
(-18°C to -15°C)



Temp Class 3L1  
(-18°C to -15°C)



Temp Class 3L1  
(-18°C to -15°C)



Temp Class 3L1  
(-18°C to -15°C)



## Self-Contained Multideck Hot Open



**H2TH-7**

Hot Open



**H2TH-10**

Hot Open



**H2TH-14**

Hot Open

|                                |      |
|--------------------------------|------|
| HEIGHT (MM)                    | 2100 |
| TOTAL LENGTH (MM)              | 685  |
| DEPTH (MM)                     | 860  |
| NET VOLUME (L)                 | 365  |
| DISPLAY AREA (M <sup>2</sup> ) | 0.93 |
| PLUG TYPE AMPERAGE             | 10A  |
| WARRANTY (YEAR)                | 1    |



Temp Class Hot  
(+60 / +80 °C)



Temp Class Hot  
(+60 / +80 °C)



Temp Class Hot  
(+60 / +80 °C)



## Self-Contained Semi-Vertical Open

**SGN141S**

Display Cabinet

|                                |      |
|--------------------------------|------|
| HEIGHT (MM)                    | 1400 |
| TOTAL LENGTH (MM)              | 650  |
| DEPTH (MM)                     | 720  |
| NET VOLUME (L)                 | 159  |
| DISPLAY AREA (M <sup>2</sup> ) | 0.42 |
| PLUG TYPE AMPERAGE             | 10A  |
| WARRANTY (YEAR)                | 2    |

Temp Class 3M1  
(-1°C to +5°C)**SGN152S**

Chiller Open

|                                | SGN152S-1 | SGN152S-2 | SGN152S-3 | SGN152S-C |
|--------------------------------|-----------|-----------|-----------|-----------|
| HEIGHT (MM)                    | 1500      | 1500      | 1500      | 1500      |
| TOTAL LENGTH (MM)              | 1017      | 1330      | 1955      | 1530      |
| DEPTH (MM)                     | 760       | 760       | 760       | 760       |
| NET VOLUME (L)                 | 345       | 460       | 690       | 530       |
| DISPLAY AREA (M <sup>2</sup> ) | 1.46      | 1.81      | 2.72      | 2.10      |
| PLUG TYPE AMPERAGE             | 10        | 10        | 15        | 10        |
| WARRANTY (YEAR)                |           |           |           | 2         |

Temp Class 3M1  
(-1°C to +5°C)Forced  
Evaporation220-240V  
Single PhaseLED  
Lighting2 Year Parts  
& Labour  
Warranty





## SGND153S Q4

Glass Door Hinged

|                                | SGND153S-1 | SGND153S-2 | SGND153S-3 | SGND153S-C |
|--------------------------------|------------|------------|------------|------------|
| HEIGHT (MM)                    | 1500       | 1500       | 1500       | 1500       |
| TOTAL LENGTH (MM)              | 1017       | 1330       | 1955       | 1530       |
| DEPTH (MM)                     | 760        | 760        | 760        | 760        |
| NET VOLUME (L)                 | 400        | 540        | 805        | 625        |
| DISPLAY AREA (M <sup>2</sup> ) | 1.46       | 1.81       | 2.72       | 2.10       |
| PLUG TYPE AMPERAGE             | 10         | 10         | 10         | 10         |
| WARRANTY (YEAR)                | 2          |            |            |            |



Temp Class 3M1  
(-1°C to +5°C)



## SGND153S Q5

Glass Door Sliding

|                                | SGND153S-1 | SGND153S-2 | SGND153S-3 | SGND153S-C |
|--------------------------------|------------|------------|------------|------------|
| HEIGHT (MM)                    | 1500       | 1500       | 1500       | 1500       |
| TOTAL LENGTH (MM)              | 1017       | 1330       | 1955       | 1530       |
| DEPTH (MM)                     | 760        | 760        | 760        | 760        |
| NET VOLUME (L)                 | 400        | 540        | 805        | 625        |
| DISPLAY AREA (M <sup>2</sup> ) | 1.46       | 1.81       | 2.72       | 2.10       |
| PLUG TYPE AMPERAGE             | 10         | 10         | 10         | 10         |
| WARRANTY (YEAR)                | 2          |            |            |            |



Temp Class 3M1  
(-1°C to +5°C)



Forced  
Evaporation



220-240V  
Single Phase



LED  
Lighting



2 Year  
Warranty

# Panasonic JAPAN QUALITY



## Delivering Reliability And Durability Since 1918

- Panasonic is building on the Japanese tradition of uncompromising quality control worldwide, developing and manufacturing fine products and delivering them to customers everywhere.
- In the pursuance of innovation and convenience, we continue to uphold quality completely.
- The origin of our product development can be found in this commitment, and it is part of Japan's manufacturing DNA that has been passed down in an unbroken line for generations.



### Quality You Can Trust

Japan's manufacturing excellence has become a global standard. No matter where we manufacture our products, these products have passed our rigorous and uncompromising quality standards. Panasonic is totally committed to manufacturing premium products of unmatched craftsmanship and superior quality that our customers have come to expect from us.



### A Century of Excellence

Panasonic was founded in 1918 by a visionary, Konosuke Matsushita in Osaka, Japan.

Since then the world has changed but our commitment in providing superior quality products of exquisite craftsmanship has remained unchanged.


Today, our brand slogan aptly encapsulates our vision of providing "A Better Life, A Better World".



# Introducing Commercial Refrigerators

## HP SERIES UPRIGHT & UNDERBENCH

**Panasonic**



**Temp Class 3M1**  
(-1°C to +5°C)

The Panasonic commercial fridge with forced evaporation and pillarless design is a great choice for the busy, modern kitchen. Now available with flexible options and 2 doors split in various widths leads to maximum utilization of floor space and ideal for storing large items.



**DAIRY**  
REFRIGERATOR



**PRODUCE**  
REFRIGERATOR



**SEAFOOD**  
REFRIGERATOR



**MEAT**  
REFRIGERATOR







## SRR-681HP(AUH) | SRR-781HP(AUH)

### Single Split Door

|                     | SRR-681HP(AUH) | SRR-781HP(AUH) |
|---------------------|----------------|----------------|
| HEIGHT (MM)*        | 1995           | 1995           |
| TOTAL LENGTH (MM)   | 620            | 745            |
| STANDARD DEPTH (MM) | 800            | 800            |
| NET VOLUME (L)      | 483            | 610            |
| WEIGHT (KG)         | 105            | 110            |
| PLUG TYPE           | 10A            | 10A            |
| AMPERAGE            |                |                |



Temp Class 3M1  
(-1°C to +5°C)



## SRR-1281HP(AUH) | SRR-1581HP(AUH)

### 2 Door Split Door

|                     | SRR-1281HP(AUH) | SRR-1581HP(AUH) |
|---------------------|-----------------|-----------------|
| HEIGHT (MM)*        | 1995            | 1995            |
| TOTAL LENGTH (MM)   | 1210            | 1460            |
| STANDARD DEPTH (MM) | 800             | 800             |
| NET VOLUME (L)      | 1080            | 1329            |
| WEIGHT (KG)         | 160             | 180             |
| PLUG TYPE           | 10A             | 10A             |
| AMPERAGE            |                 |                 |



Temp Class 3M1  
(-1°C to +5°C)



## SRR-1881HP(AUH)

### 3 Door Split Door

|                     | SRR-1881HP(AUH) |
|---------------------|-----------------|
| HEIGHT (MM)*        | 1995            |
| TOTAL LENGTH (MM)   | 1800            |
| STANDARD DEPTH (MM) | 800             |
| NET VOLUME (L)      | 1669            |
| WEIGHT (KG)         | 200             |
| PLUG TYPE           | 10A             |
| AMPERAGE            |                 |



Temp Class 3M1  
(-1°C to +5°C)



Forced  
Evaporation



220-240V  
Single Phase



Heater  
Defrost



Castors Standard  
Legs available



Center Pillarless  
Design



2 Year Parts  
& Labour  
Warranty



Product  
Lockable

\* Heights shown are with Castors.

**SUR-1261HP(AUH) | SUR-1271HP(AUH)**

2 Door Type



|                            | <b>SUR-1261HP(AUH)</b> | <b>SUR-1271HP(AUH)</b> |
|----------------------------|------------------------|------------------------|
|                            | Slimline Type          | Large Capacity Type    |
| <b>HEIGHT (MM)*</b>        | 850                    | 850                    |
| <b>TOTAL LENGTH (MM)</b>   | 1200                   | 1200                   |
| <b>STANDARD DEPTH (MM)</b> | 600                    | 750                    |
| <b>NET VOLUME (L)</b>      | 214                    | 280                    |
| <b>WEIGHT (KG)</b>         | 78                     | 84                     |
| <b>PLUG TYPE</b>           | 10A                    | 10A                    |
| <b>AMPERAGE</b>            |                        |                        |

Temp Class 3M1  
(-1°C to +5°C)**SUR-1561HP(AUH) | SUR-1571HP(AUH)**

2 Door Type



|                            | <b>SUR-1561HP(AUH)</b> | <b>SUR-1571HP(AUH)</b> |
|----------------------------|------------------------|------------------------|
|                            | Slimline Type          | Large Capacity Type    |
| <b>HEIGHT (MM)*</b>        | 850                    | 850                    |
| <b>TOTAL LENGTH (MM)</b>   | 1500                   | 1500                   |
| <b>STANDARD DEPTH (MM)</b> | 600                    | 750                    |
| <b>NET VOLUME (L)</b>      | 296                    | 393                    |
| <b>WEIGHT (KG)</b>         | 86                     | 95                     |
| <b>PLUG TYPE</b>           | 10A                    | 10A                    |
| <b>AMPERAGE</b>            |                        |                        |

Temp Class 3M1  
(-1°C to +5°C)**SUR-1861HP(AUH) | SUR-1871HP(AUH)**

3 Door Split Door



|                            | <b>SUR-1861HP(AUH)</b> | <b>SUR-1871HP(AUH)</b> |
|----------------------------|------------------------|------------------------|
|                            | Slimline Type          | Large Capacity Type    |
| <b>HEIGHT (MM)*</b>        | 800                    | 850                    |
| <b>TOTAL LENGTH (MM)</b>   | 1800                   | 1800                   |
| <b>STANDARD DEPTH (MM)</b> | 600                    | 750                    |
| <b>NET VOLUME (L)</b>      | 377                    | 495                    |
| <b>WEIGHT (KG)</b>         | 200                    | 110                    |
| <b>PLUG TYPE</b>           | 10A                    | 10A                    |
| <b>AMPERAGE</b>            |                        |                        |

Temp Class 3M1  
(-1°C to +5°C)

LED Lighting



Forced Evaporation

220-240V  
Single Phase

Heater Defrost

Castors Standard  
Legs availableCenter Pillarless  
Design2 Year Parts  
& Labour  
WarrantyProduct  
Lockable



## BR-1261HP(AUH) | BR-1271HP(AUH)

Underbench Glass Doors

|                       | BR-1261HP(AUH) | BR-1271HP(AUH) |
|-----------------------|----------------|----------------|
| HEIGHT (MM)*          | 850            | 850            |
| TOTAL LENGTH (MM)     | 1200           | 1200           |
| STANDARD DEPTH (MM)   | 600            | 750            |
| NET VOLUME (L)        | 214            | 280            |
| WEIGHT (KG)           | 88             | 94             |
| PLUG TYPE<br>AMPERAGE | 10A            | 10A            |



Temp Class 3M1  
(-1°C to +5°C)



## BR-1561HP(AUH) | BR-1571HP(AUH)

Underbench Glass Doors

|                       | BR-1561HP(AUH) | BR-1571HP(AUH) |
|-----------------------|----------------|----------------|
| HEIGHT (MM)*          | 850            | 850            |
| TOTAL LENGTH (MM)     | 1500           | 1500           |
| STANDARD DEPTH (MM)   | 600            | 750            |
| NET VOLUME (L)        | 296            | 393            |
| WEIGHT (KG)           | 96             | 105            |
| PLUG TYPE<br>AMPERAGE | 10A            | 10A            |



Temp Class 3M1  
(-1°C to +5°C)



## BR-1861HP(AUH) | BR-1871HP(AUH)

Underbench Glass Doors

|                       | BR-1861HP(AUH) | BR-1871HP(AUH) |
|-----------------------|----------------|----------------|
| HEIGHT (MM)*          | 850            | 850            |
| TOTAL LENGTH (MM)     | 1800           | 1800           |
| STANDARD DEPTH (MM)   | 600            | 750            |
| NET VOLUME (L)        | 377            | 495            |
| WEIGHT (KG)           | 114            | 125            |
| PLUG TYPE<br>AMPERAGE | 10A            | 10A            |



Temp Class 3M1  
(-1°C to +5°C)



LED  
Lighting



Forced  
Evaporation



220-240V  
Single Phase



Heater  
Defrost



Castors Standard  
Legs available



Center Pillarless  
Design



2 Year Parts  
& Labour  
Warranty



Product  
Lockable

\* Heights shown are with Castors.



## SUR-1271HP(AUH)-NN | SUR-1571HP(AUH)-NN

Underbench Solid Doors [Drawer Type]

|                       | SUR-1271HP<br>(AUH)-NN | SUR-1571HP<br>(AUH)-NN |
|-----------------------|------------------------|------------------------|
|                       | Type                   | Type                   |
| HEIGHT (MM)*          | 850                    | 850                    |
| TOTAL LENGTH (MM)     | 1200                   | 1500                   |
| STANDARD DEPTH (MM)   | 750                    | 750                    |
| NET VOLUME (L)        | 91                     | 138                    |
| WEIGHT (KG)           | 94                     | 105                    |
| PLUG TYPE<br>AMPERAGE | 10A                    | 10A                    |



Temp Class 3M1  
(-1°C to +5°C)



## SUR-1271HP(AUH)-DW | SUR-1571HP(AUH)-DW

Underbench Solid Doors [Door & Drawer Type]

|                       | SUR-1271HP<br>(AUH)-DW | SUR-1571HP<br>(AUH)-DW |
|-----------------------|------------------------|------------------------|
|                       | Type                   | Type                   |
| HEIGHT (MM)*          | 850                    | 850                    |
| TOTAL LENGTH (MM)     | 1200                   | 1500                   |
| STANDARD DEPTH (MM)   | 750                    | 750                    |
| NET VOLUME (L)        | 185                    | 264                    |
| WEIGHT (KG)           | 99                     | 110                    |
| PLUG TYPE<br>AMPERAGE | 10A                    | 10A                    |



Temp Class 3M1  
(-1°C to +5°C)



## SUR-1871HP(AUH)-NNN

Underbench Solid Doors [Drawer Type]

|                       | SUR-1861HP(AUH) |
|-----------------------|-----------------|
| HEIGHT (MM)*          | 850             |
| TOTAL LENGTH (MM)     | 1800            |
| STANDARD DEPTH (MM)   | 750             |
| NET VOLUME (L)        | 155             |
| WEIGHT (KG)           | 125             |
| PLUG TYPE<br>AMPERAGE | 10A             |



Temp Class 3M1  
(-1°C to +5°C)



## SUR-1871HP(AUH)-DWW

Underbench Solid Doors [Door & Drawer Type]


|                       | SUR-1871HP(AUH)-DWW |
|-----------------------|---------------------|
| HEIGHT (MM)*          | 850                 |
| TOTAL LENGTH (MM)     | 1800                |
| STANDARD DEPTH (MM)   | 750                 |
| NET VOLUME (L)        | 267                 |
| WEIGHT (KG)           | 140                 |
| PLUG TYPE<br>AMPERAGE | 10A                 |



Temp Class 3M1  
(-1°C to +5°C)



### Drawer Series GN Basin Layout



Forced  
Evaporation



220-240V  
Single Phase



Heater  
Defrost



Castors Standard  
Legs available



Center Pillarless  
Design



2 Year Parts  
& Labour  
Warranty



Product  
Lockable






# Introducing Commercial Freezers



## HP SERIES UPRIGHT & UNDERBENCH

**Panasonic**



**Temp Class 3L1**  
(-18°C to -15°C)

The Panasonic commercial freezers with forced evaporation and pillarless design is a great choice for the busy, modern kitchen. Now available with flexible options and 2 doors split in various widths leads to maximum utilization of floor space and ideal for storing large items.

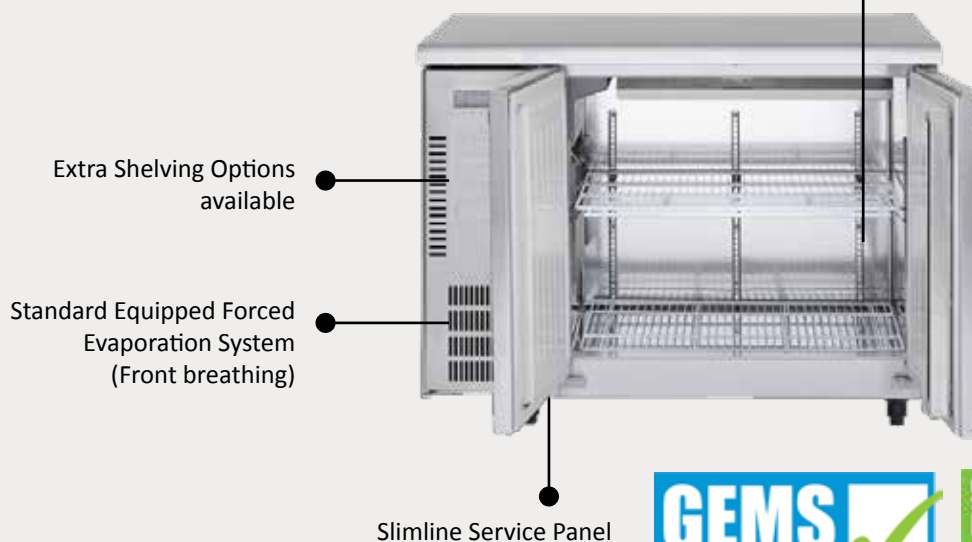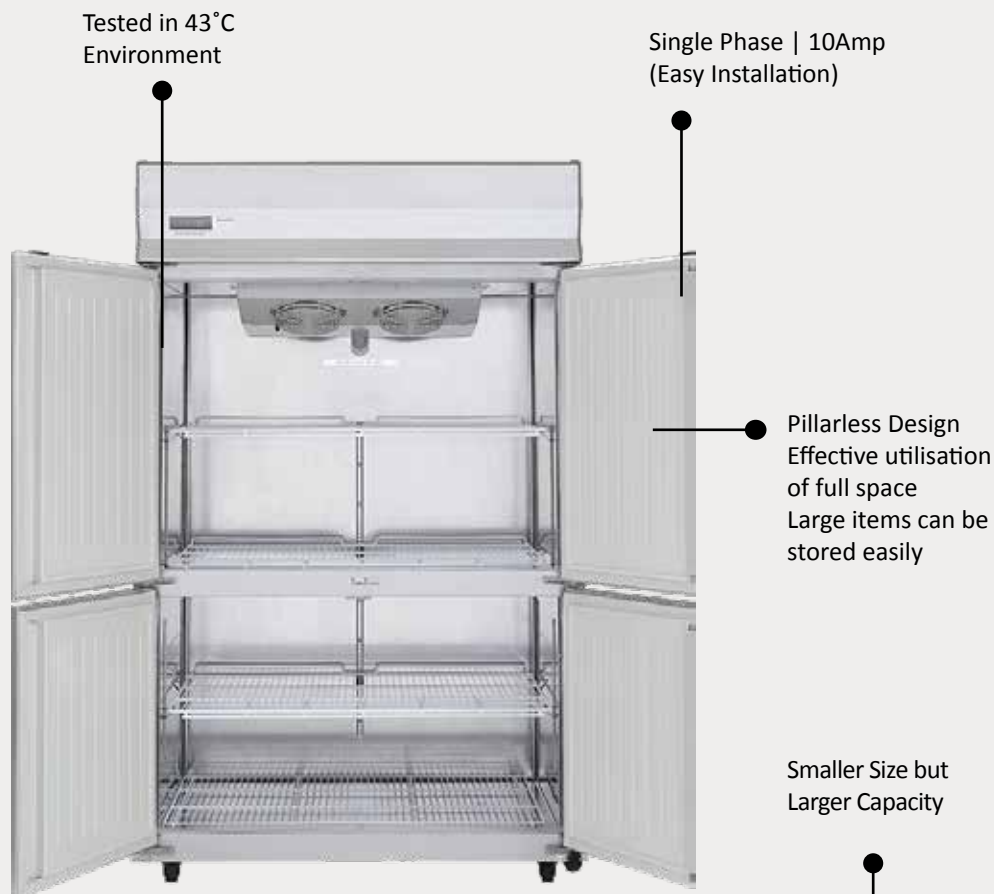



## SRF-681HP(AUH) | SRF-781HP(AUH)

Single Split Door

|                       | SRR-681HP(AUH) | SRR-781HP(AUH) |
|-----------------------|----------------|----------------|
| HEIGHT (MM)*          | 1995           | 1995           |
| TOTAL LENGTH (MM)     | 620            | 745            |
| STANDARD DEPTH (MM)   | 800            | 800            |
| NET VOLUME (L)        | 483            | 610            |
| WEIGHT (KG)           | 105            | 115            |
| PLUG TYPE<br>AMPERAGE | 10A            | 10A            |



Temp Class 3L1  
(-18°C to -15°C)



## SRF-1281HP(AUH) | SRF-1581HP(AUH)

2 Door Split Door

|                       | SRR-1281HP(AUH) | SRR-1581HP(AUH) |
|-----------------------|-----------------|-----------------|
| HEIGHT (MM)*          | 1995            | 1995            |
| TOTAL LENGTH (MM)     | 1210            | 1460            |
| STANDARD DEPTH (MM)   | 800             | 800             |
| NET VOLUME (L)        | 1080            | 1329            |
| WEIGHT (KG)           | 165             | 185             |
| PLUG TYPE<br>AMPERAGE | 10A             | 10A             |



Temp Class 3L1  
(-18°C to -15°C)



## SRF-1881HP(AUH)

3 Door Split Door

|                       | SRR-1881HP(AUH) |
|-----------------------|-----------------|
| HEIGHT (MM)*          | 1995            |
| TOTAL LENGTH (MM)     | 1800            |
| STANDARD DEPTH (MM)   | 800             |
| NET VOLUME (L)        | 1669            |
| WEIGHT (KG)           | 205             |
| PLUG TYPE<br>AMPERAGE | 10A             |



Temp Class 3L1  
(-18°C to -15°C)



220-240V  
Single Phase



Heater  
Defrost



Castors Standard  
Legs available



Center Pillarless  
Design



2 Year Parts  
& Labour  
Warranty



Product  
Lockable

\* Heights shown are with Castors.



## SUF-1271HP(AUH)

2 Door Type

|                       | SUF-1271HP(AUH) |
|-----------------------|-----------------|
| HEIGHT (MM)*          | 850             |
| TOTAL LENGTH (MM)     | 1200            |
| STANDARD DEPTH (MM)   | 750             |
| NET VOLUME (L)        | 280             |
| WEIGHT (KG)           | 84              |
| PLUG TYPE<br>AMPERAGE | 10A             |



**Temp Class 3L1**  
(-18°C to -15°C)



## SUF-1571HP(AUH)

2 Door Type

|                       | SUF-1571HP(AUH) |
|-----------------------|-----------------|
| HEIGHT (MM)*          | 850             |
| TOTAL LENGTH (MM)     | 1500            |
| STANDARD DEPTH (MM)   | 750             |
| NET VOLUME (L)        | 393             |
| WEIGHT (KG)           | 105             |
| PLUG TYPE<br>AMPERAGE | 10A             |



**Temp Class 3L1**  
(-18°C to -15°C)



## SUF-1871HP(AUH)

3 Door Split Door

|                       | SUF-1871HP(AUH) |
|-----------------------|-----------------|
| HEIGHT (MM)*          | 850             |
| TOTAL LENGTH (MM)     | 1800            |
| STANDARD DEPTH (MM)   | 750             |
| NET VOLUME (L)        | 495             |
| WEIGHT (KG)           | 120             |
| PLUG TYPE<br>AMPERAGE | 10A             |



**Temp Class 3L1**  
(-18°C to -15°C)



LED  
Lighting



Forced  
Evaporation



220-240V  
Single Phase



Heater  
Defrost



Castors Standard  
Legs available



Center Pillarless  
Design



2 Year Parts  
& Labour  
Warranty



Product  
Lockable





# Introducing Commercial Microwave Ovens

**Panasonic**

Panasonic offers a range of professional-grade commercial microwaves suitable for various culinary and food service applications. These microwaves are designed to withstand heavy use and deliver consistent performance in commercial kitchens, restaurants, cafes, and other food establishments.



**INVERTER**





Up to 15 times per day

## NN-SF57S

Light Duty Microwave —Flatbed **INVERTER**

### NN-SF57S

|                          |                    |
|--------------------------|--------------------|
| EXTERNAL DIMENSIONS (MM) | W529 x H326 x D422 |
| CAVITY DIMENSIONS (MM)   | W529 x H326 x D422 |
| POWER (W)                | 1000               |
| CAPACITY (L)             | 27                 |
| WEIGHT (KG)              | 11.7               |
| COMMERCIAL WARRANTY      | 6 months           |
| PLUG TYPE                |                    |
| AMPERAGE                 | 10A                |



Up to 100 times per day

## NE-1037

Medium Duty Microwave

### NE-1037

|                          |                    |
|--------------------------|--------------------|
| EXTERNAL DIMENSIONS (MM) | W510 x H306 x D360 |
| CAVITY DIMENSIONS (MM)   | W330 x H205 x D330 |
| POWER (W)                | 1000               |
| CAPACITY (L)             | 22                 |
| WEIGHT (KG)              | 18.6               |
| COMMERCIAL WARRANTY      | 1-year on site     |
| PLUG TYPE                |                    |
| AMPERAGE                 | 10A                |



100 to 200 times per day

## NE-1878


Heavy Duty Microwave —All Metal Door **INVERTER**

### NE-1878


|                          |                    |
|--------------------------|--------------------|
| EXTERNAL DIMENSIONS (MM) | W422 x H337 x D476 |
| CAVITY DIMENSIONS (MM)   | W330 x H175 x D310 |
| POWER (W)                | 1800               |
| CAPACITY (L)             | 18                 |
| WEIGHT (KG)              | 17.5               |
| COMMERCIAL WARRANTY      | 2-year on site     |
| PLUG TYPE                |                    |
| AMPERAGE                 | 15A                |



## NE-1037

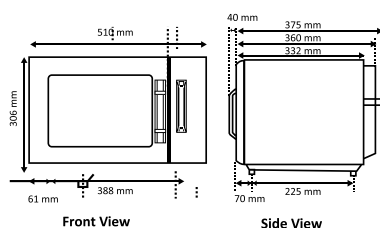

## NE-1878

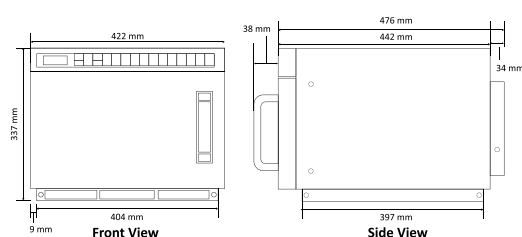



100 to 200 times per day

## NE-1853

### Heavy Duty Microwave

#### NE-1853

|                          |                    |
|--------------------------|--------------------|
| EXTERNAL DIMENSIONS (MM) | W422 x H377 x D508 |
| CAVITY DIMENSIONS (MM)   | W330 x H175 x D310 |
| POWER (W)                | 1800               |
| CAPACITY (L)             | 18                 |
| WEIGHT (KG)              | 30                 |
| COMMERCIAL WARRANTY      | 2-year on site     |
| PLUG TYPE                | 15A                |



- High speed performance
- Programmable

## NE-C1275

### Heavy Duty Combination Oven

#### NE-C1275

|                          |                                                            |
|--------------------------|------------------------------------------------------------|
| EXTERNAL DIMENSIONS (MM) | W600 x H383 x D484                                         |
| CAVITY DIMENSIONS (MM)   | W406 x H217 x D336                                         |
| POWER (W)                | 1150 (Microwave)<br>1800 (Convection Oven)<br>1800 (Grill) |
| CAPACITY (L)             | 29.6                                                       |
| WEIGHT (KG)              | 41                                                         |
| COMMERCIAL WARRANTY      | 2-year on site                                             |
| PLUG TYPE                | 15A                                                        |



- Stackable

## NE-SCV3


### Fast Cook Convection Oven

#### NE-SCV2


|                          |                                                            |
|--------------------------|------------------------------------------------------------|
| EXTERNAL DIMENSIONS (MM) | W474 x H412 x D565                                         |
| CAVITY DIMENSIONS (MM)   | W270 x H110 x D330                                         |
| POWER (W)                | 1050 (Microwave)<br>1350 (Convection Oven)<br>1800 (Grill) |
| CAPACITY (L)             | 10                                                         |
| WEIGHT (KG)              | 38.1                                                       |
| COMMERCIAL WARRANTY      | 2-year on site                                             |
| PLUG TYPE                | 20A (Single Phase)                                         |




## NE-1853

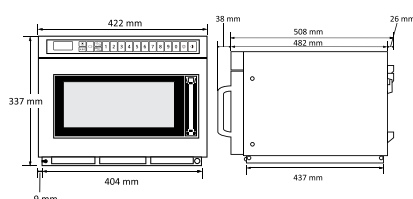

## NE-C1275

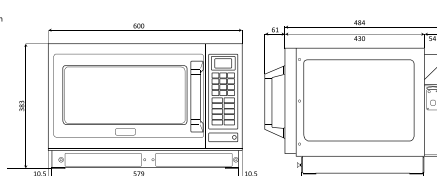

## NE-SCV3

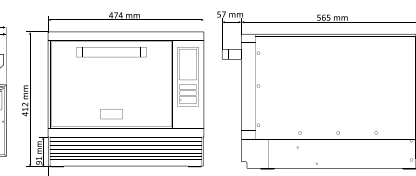



# Microwave oven

## Specifications



### ACCELERATED CLASS



### 1800 W CLASS

### 1000 W CLASS

| Performance Characteristics                                 | NE-SCV3                                                     | NE-C1275                                                    |
|-------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|
| High                                                        | 1050W   900W   800W                                         | 1350W                                                       |
| Medium                                                      | 700W   600W   500W                                          | 650W / Interval                                             |
| Low                                                         | 300W   200W                                                 | 420W & 240W / Interval                                      |
| Defrost                                                     | -                                                           | 180W / Interval                                             |
| Stand                                                       | -                                                           | Yes                                                         |
| Quartz Grill                                                | High - 1915W<br>Low - 1150W<br>(with 100% Fan Speed)        | 1840W / 1500W                                               |
| Hot Air                                                     | 1465W (180-280°C)                                           | 1800W (100-250°C)                                           |
| Combination Cooking                                         | Combination microwave with grill, hot air, grill convection | Combination microwave with grill, hot air, grill convection |
| Preheat                                                     | 150°C [Stand-by Preheat], 180-280°C (Intervals of 10°C)     | 190°C, 220°C, 240°C                                         |
| Keypad                                                      | Yes (Touch Screen)                                          | Yes                                                         |
| Timer Memory                                                | 999 free memory programs                                    | 99 free memory programs                                     |
| Multi-Stage cooking                                         | Yes (3 stages)                                              | Yes (3 stages)                                              |
| Memory Storage                                              | USB transfer                                                | SD Card                                                     |
| Connectivity                                                | LAN                                                         | None                                                        |
| Door Hinge                                                  | bottom                                                      | left side                                                   |
| Adjustable Alarm                                            | Yes                                                         | Yes                                                         |
| Number of Magnetrons                                        | 2 Magnetrons                                                | 2 Magnetrons                                                |
| Air filter on the front                                     | Yes                                                         | Yes                                                         |
| Stackable                                                   | Yes                                                         | -                                                           |
| Self diagnostics                                            | Yes                                                         | Yes                                                         |
| Cycle counter                                               | Yes                                                         | Yes                                                         |
| Cabinet and cavity finish stainless steel with ceramic base | Yes                                                         | Yes                                                         |
| Cavity Capacity                                             | 10 Litre                                                    | 29.6 Litre                                                  |
| Cavity Dimensions (WxDxH)                                   | 270 x 330x 110 mm                                           | 406 x 336 x 217 mm                                          |
| Outer Dimensions (WxDxH)                                    | 474 x 565 x 412 mm                                          | 600 x 484 x 383 mm                                          |
| Required Power                                              | 3600W / 15.8A                                               | 2900W / 12.2A                                               |
| Supply voltage                                              | 230-240V / 50Hz                                             | 230-240V / 50Hz                                             |
| Plug Type                                                   | 20amp                                                       | 15amp                                                       |
| Wet/net                                                     | 38.1kg                                                      | 41kg                                                        |
| Accessories supplied                                        | Hand Paddle, Ceramic Base Plate, Teflon Mat                 | 1 shelf, 1 ceramic plate, 1 SD card                         |
| Support Tools                                               | Control Hub App                                             | -                                                           |

| Performance Characteristics                                 | NE-1878                 | NE-1853                 | NE-1037                 |
|-------------------------------------------------------------|-------------------------|-------------------------|-------------------------|
| High                                                        | 1800W                   | 1800W                   | 1000W                   |
| Medium                                                      | 900W / Interval         | 60-90%                  | 500W / Interval         |
| Low                                                         | 340W / Interval         | 25-50%                  | -                       |
| Defrost                                                     | 170W / Interval         | 340W                    | 340W / Interval         |
| Stand                                                       | -                       | Yes                     | -                       |
| Quartz Grill                                                | -                       | -                       | -                       |
| Hot Air                                                     | -                       | -                       | -                       |
| +10 / +20 seconds                                           | -                       | Yes                     | -                       |
| Keypad                                                      | -                       | Yes                     | Yes                     |
| Timer Memory                                                | 30 Free Memory Programs | 30 free memory programs | 10 free memory programs |
| Multi-Stage cooking                                         | Yes (5 stages)          | Yes (5 stages)          | Yes (3 stages)          |
| Two-level operation                                         | -                       | -                       | -                       |
| Timer (electronic)                                          | max. 60min              | max. 30min              | max. 99min              |
| Door Hinge                                                  | bottom                  | left side               | left side               |
| Adjustable Alarm                                            | Yes                     | Yes                     | Yes                     |
| Number of Magnetrons                                        | 4 Magnetrons            | 2 Magnetrons            | 1 Magnetrons            |
| Air filter on the front                                     | Yes                     | Yes                     | -                       |
| Stackable                                                   | Yes                     | Yes                     | Yes                     |
| Self diagnostics                                            | Yes                     | Yes                     | Yes                     |
| Cycle counter                                               | Yes                     | Yes                     | Yes                     |
| Cabinet and cavity finish stainless steel with ceramic base | Yes                     | Yes                     | Yes                     |
| Cavity Capacity                                             | 18 Litre                | 18 Litre                | 22 Litre                |
| Cavity Dimensions (WxDxH)                                   | 330 x 310 x 175 mm      | 330 x 310 x 175 mm      | 330 x 330 x 205mm       |
| Outer Dimensions (WxDxH)                                    | 422 x 476 x 337 mm      | 422 x 508x 377 mm       | 510 x 360x 306 mm       |
| Required Power                                              | 2650W / 11.6A           | 2830W / 12.3A           | 1490W / 6.6A            |
| Supply voltage                                              | 230V / 50Hz             | 240V / 50Hz             | 240V / 50Hz             |
| Plug Type                                                   | 15amp                   | 15amp                   | 10amp                   |
| Wet/net                                                     | 17.5kg                  | 30kg                    | 18.6kg                  |



# Introducing Rice Cookers

**Panasonic**

Panasonic's commercial rice cookers have been carefully designed to ensure evenly cooked rice time and time again in the most demanding restaurant environments.

Uniform Cooking by  
Triple Coil

Micro Switch Control for  
More Durability

Product Compliant to  
Australian Standards

Double Thermal Fuse  
for Superior Safety

Internationally used across the  
Food Service Sector





23 cups

## SR-GA421F

### Commercial Rice Cookers

|                       | SR-GA421F |
|-----------------------|-----------|
| HEIGHT (MM)           | 289       |
| TOTAL LENGTH (MM)     | 367       |
| STANDARD DEPTH (MM)   | 424       |
| CAPACITY (L)          | 4.2       |
| WARRANTY (YEAR)       | 1         |
| PLUG TYPE<br>AMPERAGE | 10A       |



30 cups

## SR-GA541F

### Commercial Rice Cookers

|                       | SR-GA541F |
|-----------------------|-----------|
| HEIGHT (MM)           | 338       |
| TOTAL LENGTH (MM)     | 466       |
| STANDARD DEPTH (MM)   | 558       |
| CAPACITY (L)          | 5.4       |
| WARRANTY (YEAR)       | 1         |
| PLUG TYPE<br>AMPERAGE | 10A       |



40 cups

## SR-GA721F

### Commercial Rice Cookers

|                       | SR-GA721F |
|-----------------------|-----------|
| HEIGHT (MM)           | 366       |
| TOTAL LENGTH (MM)     | 466       |
| STANDARD DEPTH (MM)   | 558       |
| CAPACITY (L)          | 7.2       |
| WARRANTY (YEAR)       | 1         |
| PLUG TYPE<br>AMPERAGE | 15A       |



20 cups

## SR-UH36

### Commercial Rice Cookers

|                       | SR-UH36 |
|-----------------------|---------|
| HEIGHT (MM)           | 347     |
| TOTAL LENGTH (MM)     | 428     |
| STANDARD DEPTH (MM)   | 384     |
| CAPACITY (L)          | 3.61    |
| WARRANTY (YEAR)       | 1       |
| PLUG TYPE<br>AMPERAGE | 10A     |



Triple Coil for Uniform Cooking



Micro switch Control for More Durability\*



Double Thermal Fuse for superior safety



Stainless Steel Lid



1 Year Warranty



Scoop Holder



Steam Vent



Dew Collector



Side, bottom & Top Heater

## Rice cooker Specifications



| Model Number             | SR-GA721F                                                             | SR-GA541F                                                             | SR-GA421F                                                             | SR-UH36                                                               |
|--------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------|
| Power Source             | 240V / 15A                                                            | 240V / 10A                                                            | 240V / 10A                                                            | 230V/10A                                                              |
| Power Consumption        | 2500W                                                                 | 1800W                                                                 | 1550W                                                                 | 1400W                                                                 |
| Pan                      | Non-stick                                                             | Non-stick                                                             | Non-stick                                                             | Anodised aluminium                                                    |
| Pan Thickness            | 1.95mm                                                                | 1.95mm                                                                | 1.95mm                                                                | 1.95mm                                                                |
| Rice cooking             | Yes                                                                   | Yes                                                                   | Yes                                                                   | Yes                                                                   |
| Capacity                 | 7.2L (40 cups)                                                        | 5.4L (30 cups)                                                        | 4.2L (23 cups)                                                        | 3.6L (20 cups)                                                        |
| Keep warm                | 5hr                                                                   | 5hr                                                                   | 5hr                                                                   | 12hr                                                                  |
| Dimension (H x W x D) mm | 366 x 466 x 558                                                       | 366 x 466 x 558                                                       | 289 x 367 x 424                                                       | 347 x 428 x 384                                                       |
| Weight                   | 15.0kg                                                                | 13.5kg                                                                | 6.4kg                                                                 | 8.2kg                                                                 |
| Color                    | Silver                                                                | Silver                                                                | Silver                                                                | Silver                                                                |
| Accessories              | Measuring cup.<br>Extra bowl available<br>as spare part on<br>request | Measuring cup.<br>Extra bowl available<br>as spare part on<br>request | Measuring cup.<br>Extra bowl available<br>as spare part on<br>request | Measuring cup.<br>Extra bowl available<br>as spare part on<br>request |



Triple Coil for Uniform Cooking



Micro switch Control for More Durability\*



Double Thermal Fuse for superior safety



Stainless Steel Lid



Scoop Holder



Steam Vent



Dew Collector



Side, bottom & Top Heater



Side heater








**Panasonic**




# Profile Drawings

## Doored Chiller Range


**BV520 W VS**

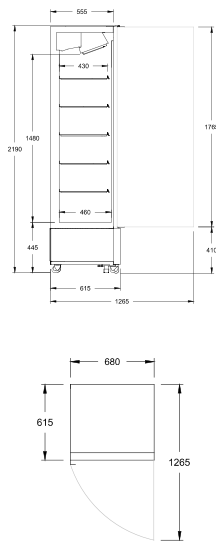


**BV770 W VS**

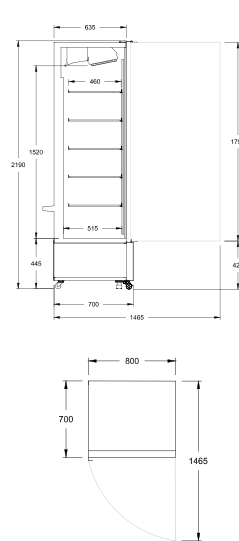

**BV1300 W VS**

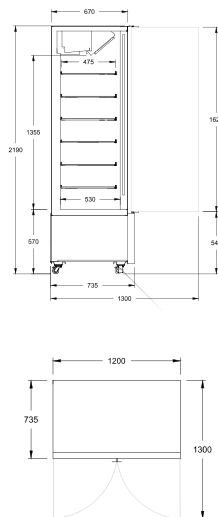


**BV1600 W VS**

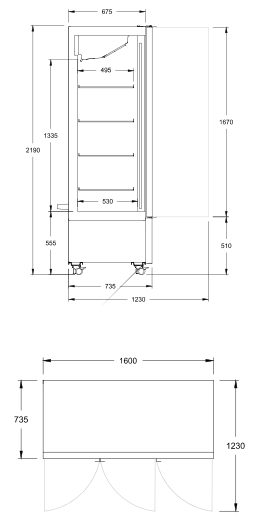


## Multideck Range


**H2TMS**

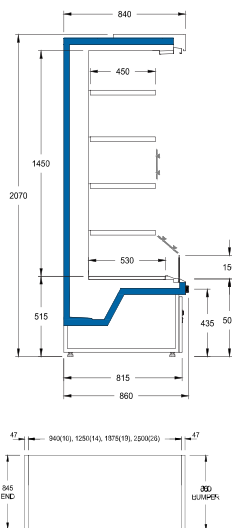


**H2TMDS**

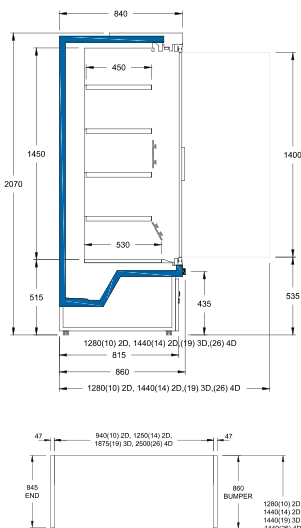

**H2TLDS**

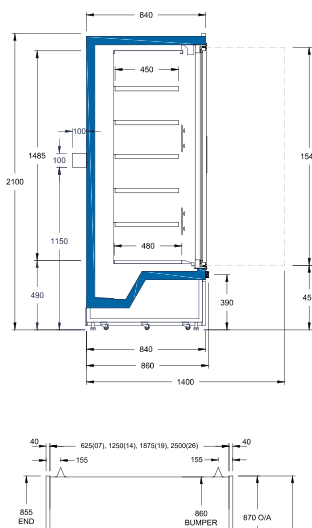



**H2TH**

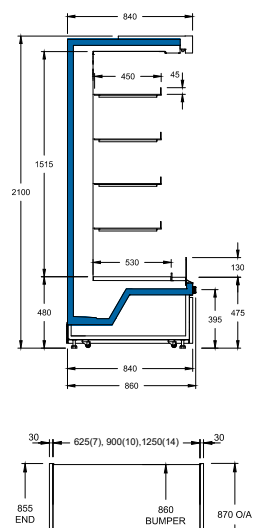





## Semi-vertical Range



**SGN141S**





**SGN152S**



**SGND153S HINGED**





**SGND153S SLIDING**

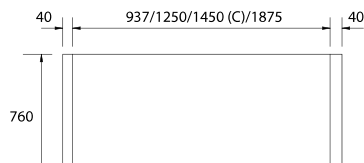



## Commercial Refrigerators Range



**SRR-681HP(AUH)**

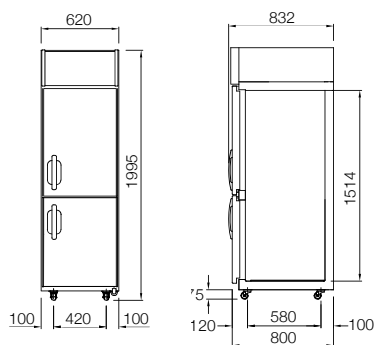


**SRR-781HP(AUH)**

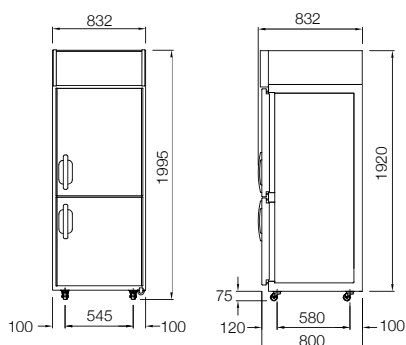


**SRR-1281HP(AUH)**

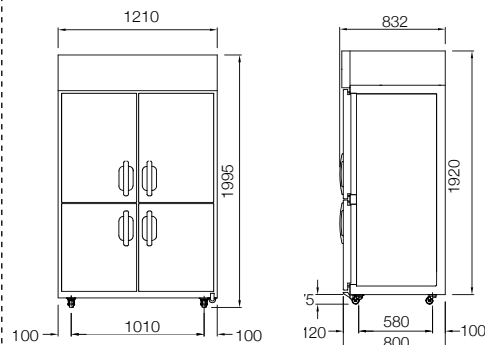


**SRR-1581HP(AUH)**

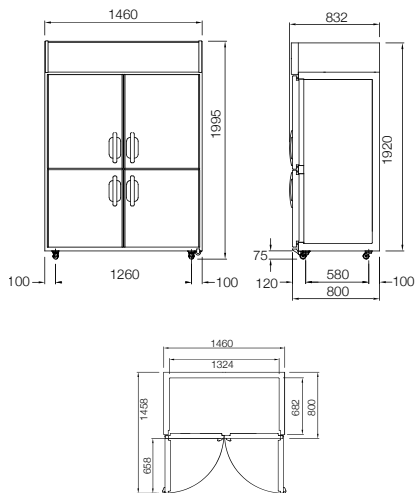


**SRR-1881HP(AUH)**

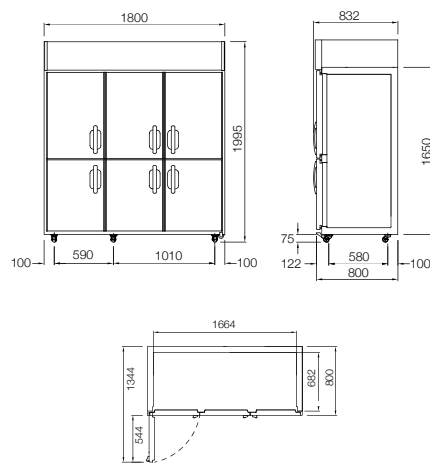


**SUR-1261HP(AUH)**

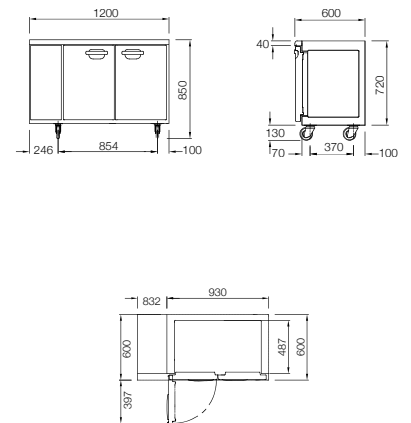


**SUR-1271HP(AUH)**

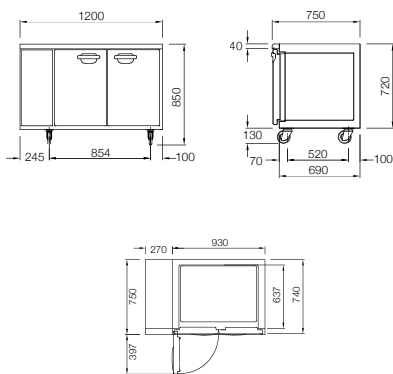


**SUR-1561HP(AUH)**

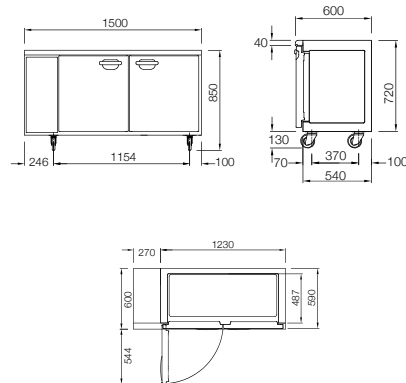


**SUR-1861HP(AUH)**

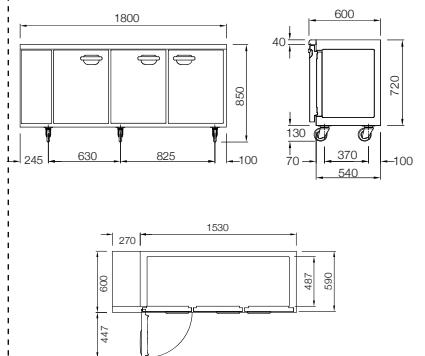

**SUR-1571HP(AUH)**

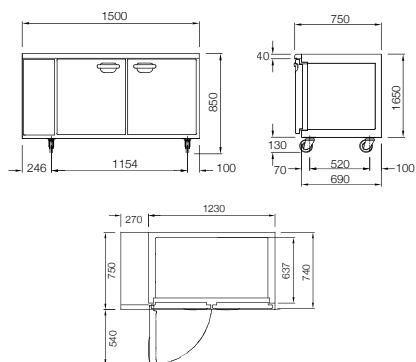


**SUR-1871HP(AUH)**

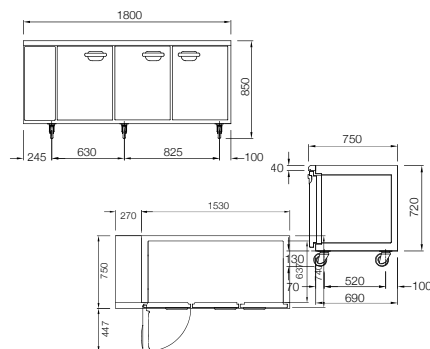


## Commercial Refrigerators Range


**BR-1261HP(AUH**  
**[SLIMLINE TYPE]**

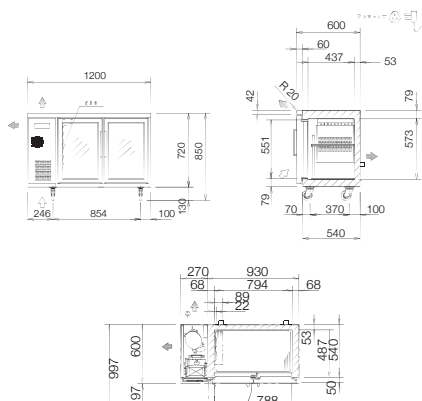


**BR-1271HP(AUH)**  
**[LARGE CAPACITY TYPE]**

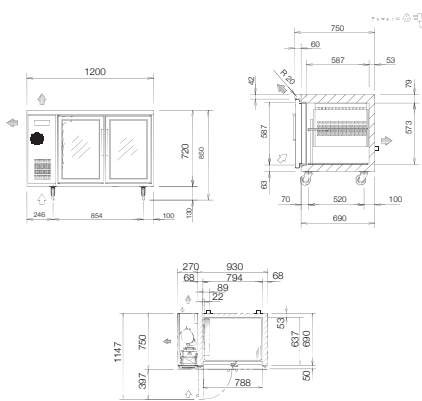


**BR-1561HP(AUH  
[SLIMLINE TYPE])**

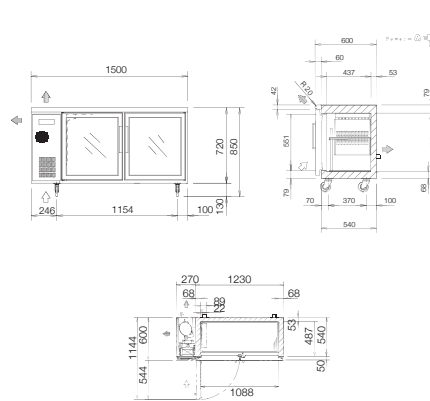


**BR-1571HP(AUH)**  
**[LARGE CAPACITY TYPE]**

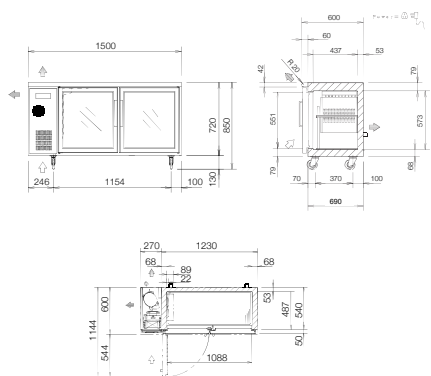


**BR-1861HP(AUH)**  
**[SLIMLINE TYPE]**

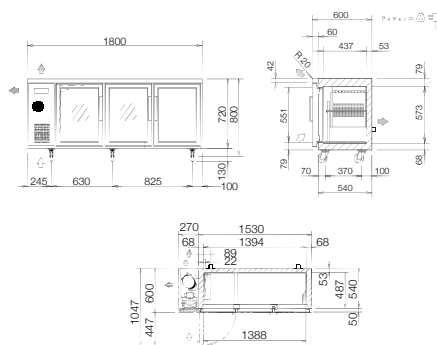


**BR-1871HP(AUH)**  
**[LARGE CAPACITY TYPE]**

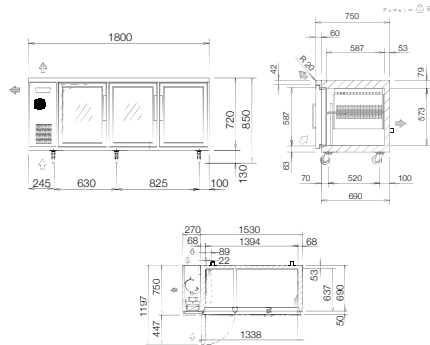


**SUR-1271HP(AUH)-NN**  
**[DRAWER TYPE]**

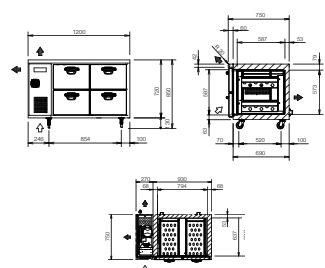


**SUR-1871HP(AUH)-NNN**  
**[DRAWER TYPE]**

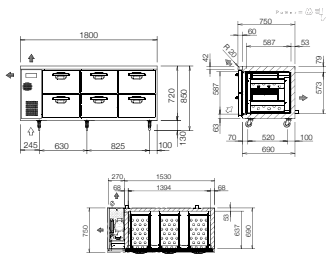


**SUR-1571HP(AUH)-NN**  
**[DRAWER TYPE]**

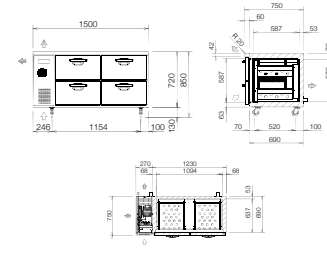


**SUR-1271HP(AUH)-DW**  
[DRAWER TYPE]

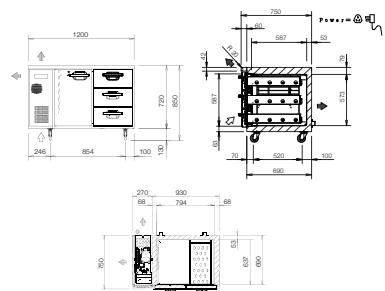

**SUR-1571HP(AUH)-DW**  
**[DRAWER TYPE]**

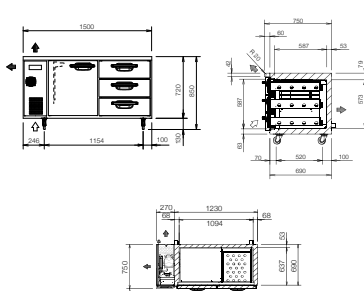


**SUR-1871HP(AUH)-DWW**  
[DRAWER TYPE]

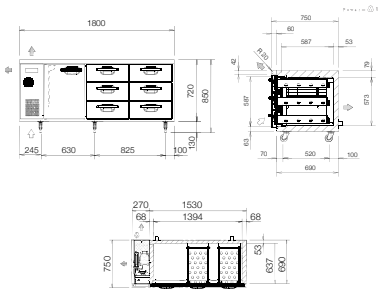


## Commercial Freezers Range


**SRF-681HP(AUH)**

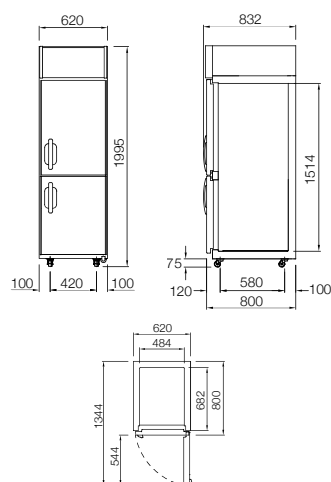


**SRF-781HP(AUH)**

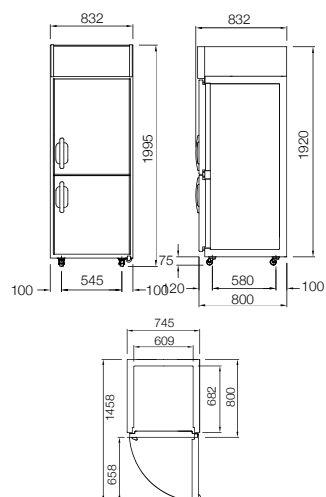


**SRF-1281HP(AUH)**

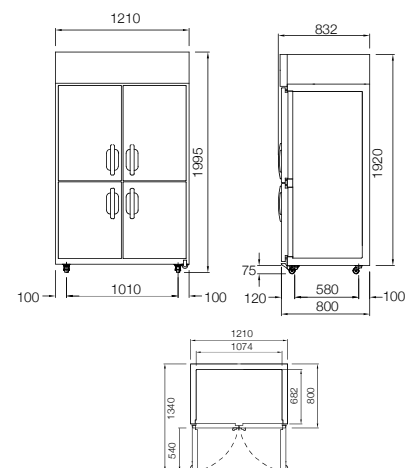


**SRF-1581HP(AUH)**

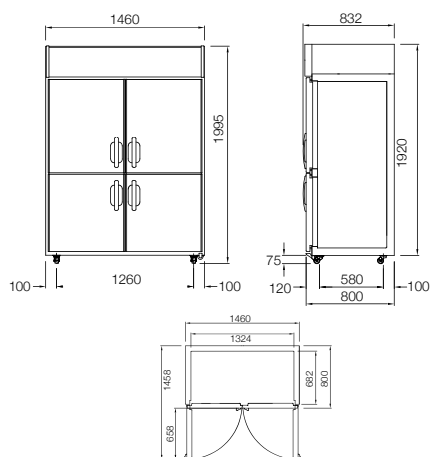


**SRF-1881HP(AUH)**

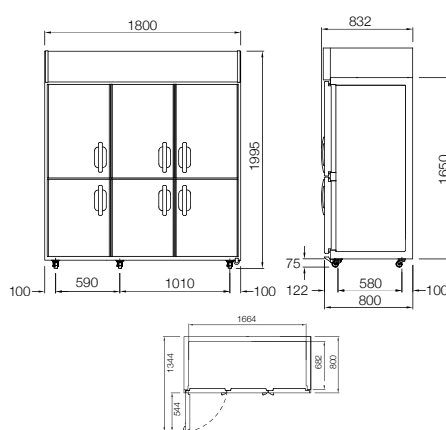


**SUF-1271HP(AUH)**

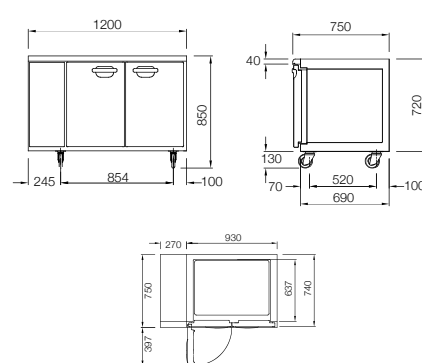

**SUF-1561HP(AUH)**

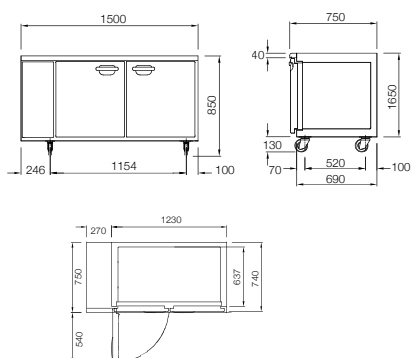

**SUF-1871HP(AUH)**

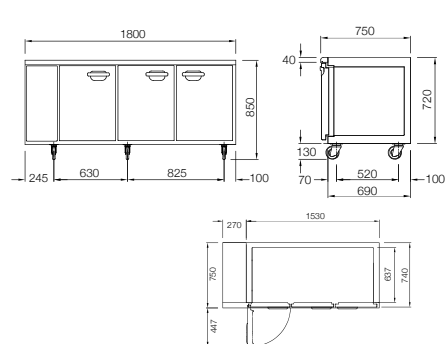

## BEVERAGES

## HOT CASE

## ORDER HERE

| ESPRESSO      |           | HOT DRINKS |      |
|---------------|-----------|------------|------|
| KAKAO         | 2.00 3.10 | WASSER     | 1.00 |
| KAKAO MIT     | 3.00 3.50 | APFELSAFT  | 2.00 |
| CHOCOLATE     | 2.00      | LEMONADE   | 2.00 |
| EXTRA SAHNE   | 1.40      | CHARITEA   | 2.00 |
| EXTRA SHOT    | 1.20      | COCA COLA  | 2.40 |
| EXTRA ISOJA   | 0.80      | FRUIT KOLA | 2.40 |
| HOT CHOCOLATE | 3.00      | PETER PAN  | 4.50 |









## Contact Details - Australia

### Customer Service

[panasonic@husmann.com](mailto:panasonic@husmann.com)

### Warranty & Tech Support

[warranty.aus@husmann.com](mailto:warranty.aus@husmann.com)

### Spare Parts

[spares\\_aus@husmann.com](mailto:spares_aus@husmann.com)

### AUSTRALIA

Head Office: **Sydney**

**Address:** 66 Glendenning Road, Glendenning,  
NSW 2761 Australia

**Phone:** 1300 198 476

**Web:** [husmann.com.au](http://husmann.com.au)

### NEW ZEALAND

Head Office: **Auckland**

**Address:** 2-6 Niall Burgess Road,  
Mt Wellington, Auckland, 1060 New Zealand

**Phone:** 0800 473 374

**Web:** [mcalpinehusmann.co.nz](http://mcalpinehusmann.co.nz)