

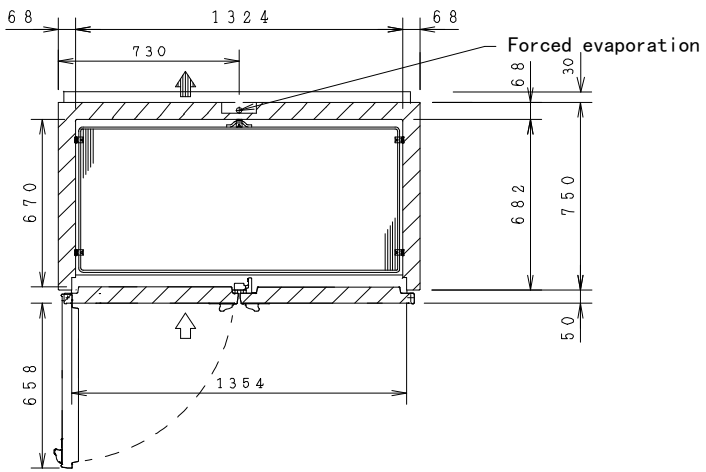


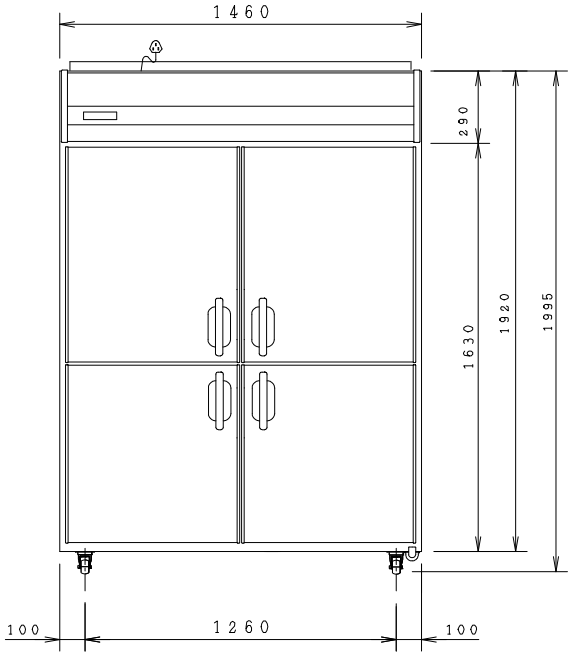

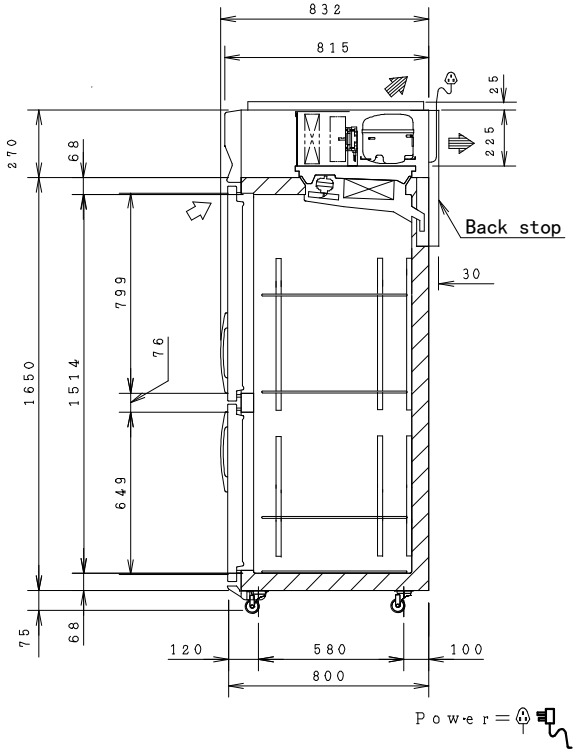

Description		Commercial refrigerator		
Model Number		SRR-1581HP(AUH)		
Dimensions	Overall Dimension (W*D*H)	1460mm	800+(30)mm	1995+(25)mm
	Outside Dimension (W*D*H)	1324mm	682mm	1514mm
Effective Volume		1329 L		
Material	Overall Material	Stainless Steel Plate OUT: TTS443M-NO.4		
	Door	Stanless Steel Plate OUT: TTS443M-NO.4		
	Inner Material	Stainless Steel Plate IN: JYH21CT-2B		
	Net Rack	P E . and painted steel wire footings		
	Insulation	Cyclopentane Horniness Froth		
Performance	Condition	External Temperature 30°C With no lord not exposed to direct sunlight		
	Internal Temperature	Below -5°C		
Temperature Setting Range		- 8 ~ 10 °c		
Freezing Assembly	Comperessor	Obturation Completed		
	Condenser	Fin Type Forced Circulation Of Cold Air		
	Evaportor	Fin Type Forced Circulation		
	Refrigrant	R290		
	Fan Motors	Evaporator	Single Phase INPUT DC 12V 6Wx2	
		Condenser	Single Phase INPUT DC 12V 8.4W	
	Tem. Meter	Mini Computer Controlled		
	Defrost	Mini Computer controlled, Auto heat desfrost		
Power Specification	Power	Single-Phase 220V ~ 240V 50Hz		
	Efficiency Consumption	Defrosting 579 W		
		Cooling 475 W		
	—	—		
	—	—		
Power	Power Cord	Lenth: 3.0m		
	Applicable Socket	2-plug with gronging end 10A 250V		
Table Foot		Colophony Control Bound 75mm		
Accessories		4 Net rack , 15 net rack support .		
Others		Condenser Filternet , figurethermometer		
Weight		180 kg		

Note: 1 . For the output power: The electromotor normal stipulatlated output power.

2 . Please use this numerical value , if you want to express the electrical expender .

Panasonic Appliances Cold Chain (Dalian) Co.,Ltd	APPROVALS	DESIGN	SCALE			PART CODE	
	Li Fei 2021.12.10	Xu Na 2021.12.10	A4	SRR-1581HP(AUH)-00		PRODUCT NAME	SRR-1581HP(AUH)
			1/20	DATE	2021.12.10		

The specifications are subject to partial changes due to improvements CAD 00