

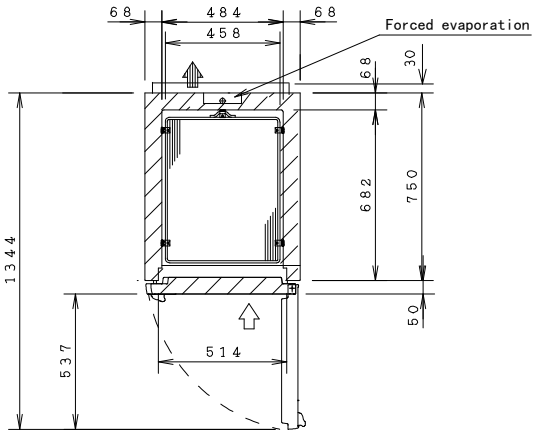


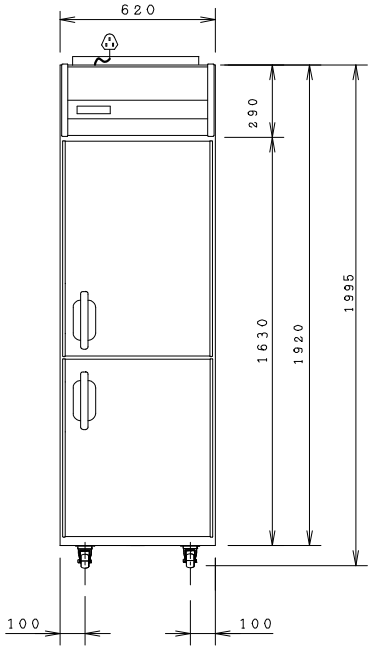

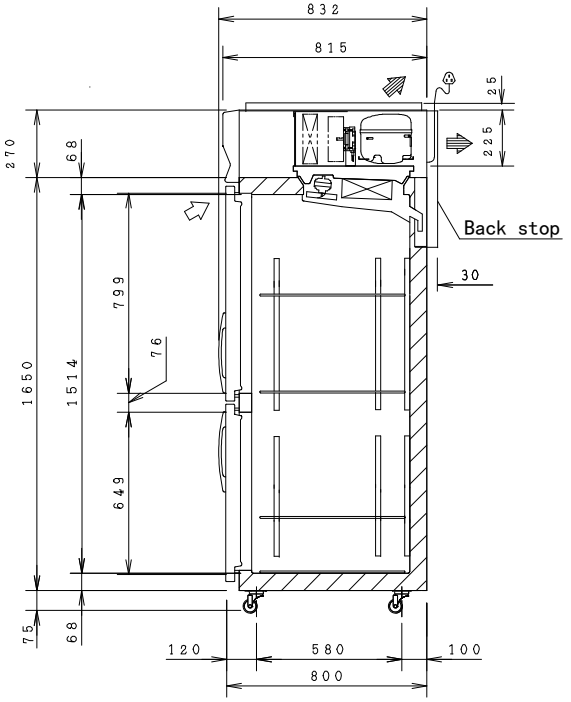

Power=

Description		Commercial refrigerator	
Model Number		SRR-681HP(AUH)	
Dimensions	Overall Dimension (W*D*H)	620mm	800+(30)mm	1995+(25)mm
	Outside Dimension (W*D*H)	484mm	682mm	1514mm
Effective Volume		483 L	
Material	Overall Material	Stainless Steel Plate OUT: TTS443M-NO.4	
	Door	Stanless Steel Plate OUT:TTS443M-NO.4	
	Inner Material	Stainless Steel Plate IN: JYH21CT-2B	
	Net Rack	P E . and painted steel wire footings	
	Insulation	Cyclopentane Horniness Froth	
Performance	Condition	External Temperature 30°C With no lord not exposed to direct sunlight	
	Internal Temperature	Below -5°C	
Temperature Setting Range		- 8 ~ 10 °C	
Freezing Assembly	Comperessor	Obturation Completed	
	Condenser	Fin Type Forced Circulation Of Cold Air	
	Evaportor	Fin Type Forced Circulation	
	Refrigrant	R290	
	Fan Motors	Evaporator	Single Phase INPUT DC 12V 6W
		Condenser	Single Phase INPUT DC 12V 8.4W
	Tem. Meter	Mini Computer Controlled	
	Defrost	Mini Computer controlled, Auto heat desfrost	
Power Specification	Power	Single-Phase 220V ~ 240V 50Hz	
	Efficiency Consumption	Defrosting 294 W	
		Cooling 235 W	
	—	—	
	—	—	
Power	Power Cord	Lenth: 3.0m	
	Applicable Socket	2-plug with gronging end 10A 250V	
Table Foot		Colophony Control Bound 75mm	
Accessories		4 Net rack , 12 net rack support .	
Others		Condenser Filternet , figurethermometer	
Weight		105 kg	

Note:1. For the output power:The electromotor normal stipulatlated output power.

2. Please use this numerical value, if you want to express the electrical expender.

	APPROVALS	DESIGN	SCALE			PART CODE	
Panasonic Appliances Cold Chain (Dalian) Co.,Ltd	Li Fei 2021.12.10	Xu Na 2021.12.10	A4 1/20	SRR-681HP(AUH)-00	DATE 2021.12.10	PRODUCT NAME	SRR-681HP(AUH)

The specifications are subject to partial changes due to improvements CAD 00